


Esquema Elétrico



Informações Gerais

Medidas: 1kHz x 1Vdc
 Fio de Cobre Eletrolítico: 180° C – Classe H
 Material Antichama: UL 94
 Rohs

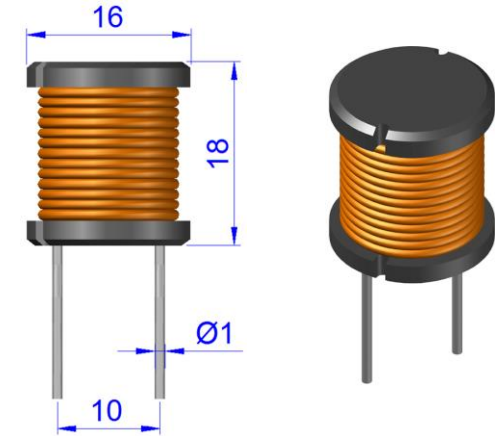

Código	Indutância μH	Corrente A	Resistência Ω	Tolerância
DR16180003	3,3	10	0,005	20%
DR16180004	4,7	10	0,006	
DR16180006	6,8	10	0,007	
DR16180010	10	10	0,009	
DR16180015	15	10	0,012	
DR16180022	22	10	0,013	
DR16180033	33	8,3	0,019	
DR16180047	47	8,3	0,024	10%
DR16180068	68	6,5	0,037	
DR16180100	100	5,2	0,058	
DR16180150	150	5,2	0,073	
DR16180220	220	4,1	0,110	
DR16180330	330	3,3	0,170	
DR16180470	470	2,6	0,250	
DR16180680	680	2,0	0,380	
DR16181000	1000	2,0	0,470	
DR1618001K	10000	0,5	5,660	

