


MATERIALS AND FINISHES:  
 BODY STAINLESS STEEL  
 PASSIVATED  
  
 CENTER CONTACT BERYLLIUM COPPER  
 PLATED GOLD  
  
 INSULATOR TEFLON

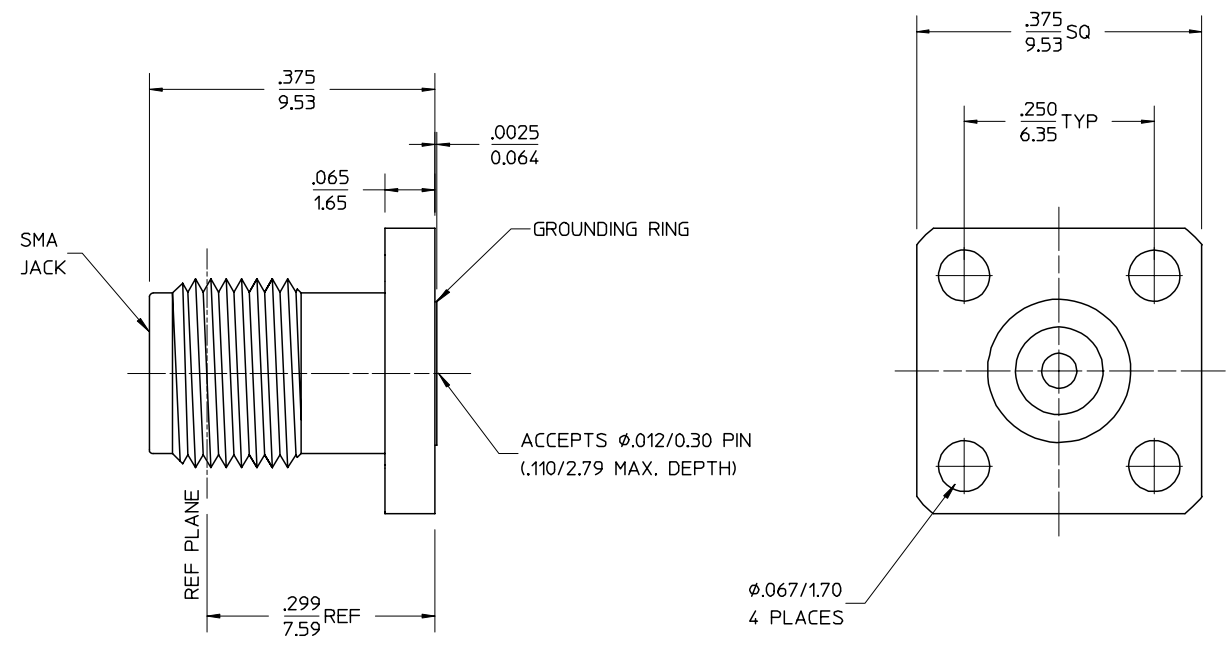

PART # 73251-0900

MIL-STD-348, FIGURE 310-2	INTERFACE
PS-89675-2910	ELECTRO/MECH PERFORMANCE
SPECIFICATION	DESCRIPTION

CNG: NEW RELEASE	EC NO. URF-0233	DESCRIPTION	UNLESS OTHERWISE SPECIFIED DIMS ARE INCHES AND ANGLES ARE DEGREES. 1. ✓ 63 ALL OVER. 2. NO CHATTER OR NON-UNIFORM SURFACE FINISH ALLOWED. 3. PARTS TO BE FREE OF BURRS & SHARP EDGES .005 MAX BREAK. 4. EXTERNAL THREADS TO BE ROLLED OR SINGLE POINT. 5. DIAMETERS TO BE CONCENTRIC WITHIN .003 TIR.
	DRWN: TEF 06/21/99 CHK: DHG 06/21/99 APPR: GMH 06/21/99		
A	REV		

QUALITY SYMBOLS  
 MAJOR  
 CRITICAL

GENERAL TOLERANCES: (UNLESS SPECIFIED)	SCALE	DESIGN UNITS
4 PLACES ± .0005 3 PLACES ± .005 2 PLACES ± .01 1 PLACE ± .1	mm INCH	mm INCH
ANGULAR: ±2°	DRAWN BY & DATE EDC 02/19/99	CHECKED BY & DATE DHG 02/19/99
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	APPROVED BY & DATE GMH 02/19/99	CAD FILENAME

THIRD ANGLE PROJECTION	DIMENSIONS: mm INCH mm ONLY
TITLE: SMA JACK, RECEPTACLE, 4 HOLE FLANGE MOUNT, ACCEPTS .012 DIA PIN SMA-JR/F	
MOLEX MOLEX INCORPORATED	
MATERIAL NO. SEE NOTE	DRAWING NO. SD-73251-090

1	A
SHT	REV
REVISE ON CAD ONLY	
SHEET NO. 1 of 1	
SIZE B	