


# PSG.0B.302.CLAD35

## PUSH-PULL PLUG, 2 PIN CONTACTS, SOLDER, 3.5 MM COLLET

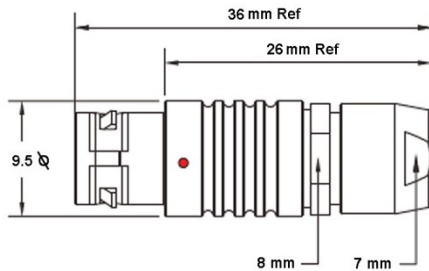

| CONTACT INFO |        | DIA<br>mm |
|--------------|--------|-----------|
| MALE         | FEMALE |           |
|              |        | 0.9       |

| KEY SPECIFICATIONS   |              |
|----------------------|--------------|
| CONNECTOR SERIES     | PSG          |
| CONNECTOR SIZE       | 0B           |
| CONNECTOR GENDER     | MALE         |
| CODING               | G            |
| LOCKING STYLE        | SELF LOCKING |
| ATTACHMENT METHOD    | SOLDER       |
| IP RATING            | IP 50        |
| COLLET SIZE          | 3.5 MM       |
| STANDARD MATE SERIES | FSG          |

| GENERAL SPECIFICATIONS  |                                  |
|-------------------------|----------------------------------|
| TEMPERATURE RANGE       | -55 DEG C - + 200 DEG C          |
| INSULATOR MATERIAL      | PEEK                             |
| SOLDER CONTACT MATERIAL | COPPER ALLOY, GOLD PLATED        |
| CONNECTOR BODY MATERIAL | BRASS, NICKEL PLATED             |
| COUPLING NUT, SCREW     | BRASS, CHROME PLATED             |
| INSULATION RESISTANCE   | EQUAL OR GREATER THAN 100 M-OHMS |

MILSPECWEST - The Very Best in Micro Interconnect Products  
AEROSPACE \* MEDICAL \* AUTOMOTIVE \* INDUSTRIAL \* MICRO-ELECTRONICS  
milspecwest.com sales@milspecwest.com 949-636-9677