


Absolute Maximum Ratings

| Parameter | Symbol | Limits | Unit |
|-----------------------------|-------------|------------|------|
| Input voltage | V_i | -358 | V |
| Output voltage | V_o | 200 | mApk |
| ESD endurance | V_{surge} | 2 | kV |
| Operating temperature range | T_{opr} | -25 ~ +80 | °C |
| Storage temperature range | T_{stg} | -25 ~ +105 | °C |

Dimension(Unit : mm)

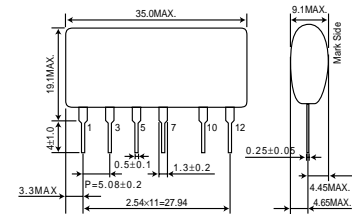


Electrical Characteristics


| Parameter | Symbol | Min. | Typ. | Max. | Unit | Conditions |
|-----------------------------|--------|-------|-------|-------|------|--------------------------------|
| Input voltage range | V_i | -240 | -311 | -358 | V | DC (187~276VAC) |
| Output voltage | V_o | -11.5 | -12.5 | -13.2 | V | $V_i=-311V, I_o=150mA$ |
| Output current | I_o | 0 | - | 200 | mApk | $V_i=-311V$ *1 |
| Line regulation | V_r | - | 0.04 | 0.15 | V | $V_i=-358\sim-240V, I_o=150mA$ |
| Load regulation | V_l | - | 0.10 | 0.20 | V | $V_i=-311V, I_o=0\sim150mA$ |
| Output ripple voltage | V_p | - | 0.05 | 0.15 | Vp-p | $V_i=-311V, I_o=150mA$ *2 |
| Power conversion efficiency | η | 64 | 72 | - | % | $V_i=-311V, I_o=200mA$ |

*1 Maximum output current varies depending on ambient temperature ; please refer to derating curve.
 *2 Spike noise is not included in output ripple voltage.


Derating Curve



Conversion Efficiency




Application circuit

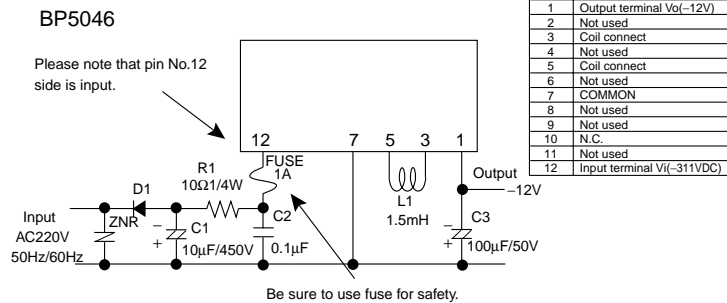


| Pin No. | Function |
|---------|-------------------------------|
| 1 | Output terminal $V_o(-12V)$ |
| 2 | Not used |
| 3 | Coil connect |
| 4 | Not used |
| 5 | Coil connect |
| 6 | Not used |
| 7 | COMMON |
| 8 | Not used |
| 9 | Not used |
| 10 | N.C. |
| 11 | Not used |
| 12 | Input terminal $V_i(-311VDC)$ |

Be sure to use fuse for safety.
 For actual usage, Please kindly evaluate and confirm our part mounted in your product, Especially, Please make sure to confirm whether the load current exceed Max. rated current by using the current probe.

Load Regulation



Surface Temperature Rising



External components setting

- FUSE:** Fuse. Please make sure to use quick acting fuse 1A
- C1:** Capacitor for input voltage smoothing. Capacitance : 10~100µF Rated voltage : 450V or higher Ripple current is 0.13Arms above.
- C2:** For noise terminal voltage reduction. Capacitance : 0.1µF~0.22µF Rated voltage : 450V or higher Film capacitor or ceramic capacitor. Reduce the noise terminal voltage. The constant value should be evaluated in the set.
- C3:** Capacitor for Output voltage smoothing. Capacitance : 100µF~2200µF Rated voltage : 25V or higher, ESR is 0.4Ω max. Ripple current is 0.25Arms above. Output noise voltage is influenced. Please evaluate it in the actual set.
- D1:** Rectifier diode. In the absolute maximum ratings, the reverse peak voltage should be 800V or higher, the average rectifying current should be 0.5A or higher, and the peak surge current should be 20A or higher. (Full-wave rectifier can be used in out part.)
- L1:** Choke coil. Coil for switching regulator. The inductance should be 1.5mH, the rated direct current should be 0.3A above. Otherwise heating or abnormal oscillation occurs.
- R1:** For noise terminal voltage reduction. 10Ω~22Ω 1/4W Reduce the noise terminal voltage. Please set it, if necessary. The constant value should be evaluated in set.
- ZNR:** Varistor. Varistor must be used. It protects this part from lightning surge and static electricity.

Precautions on Use of ROHM Power Module

Safety Precautions

- 1) The products are designed and produced for application in ordinary electronic equipment (AV equipment, OA equipment, telecommunication equipment, home appliances, amusement equipment etc.).
If the products are to be used in devices requiring extremely high reliability (medical equipment, transport equipment, aircraft/spacecraft, nuclear power controllers, fuel controllers, car equipment including car accessories, safety devices, etc.) and whose malfunction or operational error may endanger human life and sufficient fail-safe measures, please consult with the Company's sales staff in advance. If product malfunctions may result in serious damage, including that to human life, sufficient fail-safe measures must be taken, including the following:
 - [a] Installation of protection circuits or other protective devices to improve system safety
 - [b] Installation of redundant circuits in the case of single-circuit failure
- 2) The products are designed for use in a standard environment and not in any special environments. Application of the products in a special environment can deteriorate product performance. Accordingly, verification and confirmation of product performance, prior to use, is recommended if used under the following conditions:
 - [a] Use in various types of liquid, including water, oils, chemicals, and organic solvents
 - [b] Use outdoors where the products are exposed to direct sunlight, or in dusty places
 - [c] Use in places where the products are exposed to sea winds or corrosive gases, including Cl₂, H₂S, NH₃, SO₂, and NO₂
 - [d] Use in places where the products are exposed to static electricity or electromagnetic waves
 - [e] Use in proximity to heat-producing components, plastic cords, or other flammable items
 - [f] Use involving sealing or coating the products with resin or other coating materials
 - [g] Use involving unclean solder or use of water or water-soluble cleaning agents for cleaning after soldering
 - [h] Use of the products in places subject to dew condensation
- 3) The products are not radiation resistant.
- 4) The Company is not responsible for any problems resulting from use of the products under conditions not recommended herein.
- 5) The Company should be notified of any product safety issues. Moreover, product safety issues should be periodically monitored by the customer.

Precautions Regarding Application Example and External Circuits

- 1) If change is made to the constant of an external circuit, allow a sufficient margin due to variations of the characteristics of the products and external components, including transient characteristics, as well as static characteristics. Please be informed that the Company has not conducted investigations on whether or not particular changes in the application examples or external circuits would result in the infringement of patent rights of a third party.
- 2) The application examples, their constants, and other types of information contained herein are applicable only when the products are used in accordance with standard methods.
Therefore, if mass production is intended, sufficient consideration to external conditions must be made.

Prohibitions Regarding Industrial Property

- 1) These Specifications contain information related to the Company's industrial property. Any use of them other than pertaining to the usage of appropriate products is not permitted. Duplication of these Specifications and its disclosure to a third party without the Company's permission is prohibited.
- 2) Information and data on products, including application examples, contained in these specifications are simply for reference; the Company does not guarantee any industrial property rights, intellectual property rights, or any other rights of a third party regarding this information or data. Accordingly, the Company does not bear any responsibility for:
 - [a] infringement of the intellectual property rights of a third party
 - [b] any problems incurred by the use of the products listed herein.
- 3) The Company prohibits the purchaser of its products to exercise or use the intellectual property rights, industrial property rights, or any other rights that either belong to or are controlled by the Company, other than the right to use, sell, or dispose of the products.