


ITEM	PART#	DESCRIPTION	QTY	UOM
A,B	901420010	CGrid Crp Conn Hsg DR FL Polz 10Ckt	2	PC
C	901190109	CGrid Term Fem Crp LFH SnA 2224AWG	20	PC
D	--	PAPER PRINTED PAPER WHITE	1	PC

FROM	TO	DESCRIPTION	COLOR
A1	B9	1X22AWG DISC MPPE BK UL11028	BLACK
A2	B10	1X22AWG DISC MPPE BK UL11028	BLACK
A3	B7	1X22AWG DISC MPPE BK UL11028	BLACK
A4	B8	1X22AWG DISC MPPE BK UL11028	BLACK
A5	B5	1X22AWG DISC MPPE BK UL11028	BLACK
A6	B6	1X22AWG DISC MPPE BK UL11028	BLACK
A7	B3	1X22AWG DISC MPPE BK UL11028	BLACK
A8	B4	1X22AWG DISC MPPE BK UL11028	BLACK
A9	B1	1X22AWG DISC MPPE BK UL11028	BLACK
A10	B2	1X22AWG DISC MPPE BK UL11028	BLACK

MOLEX P/N
MOLEX
BATCH WK/YR

DETAIL A

TABLE			
PART NUMBER	L1	L2 (REF)	TITLE
2196581102	150±8	15	CGRID III R-R 10ckt 150mm disc Sn
2196581103	300±10	15	CGRID III R-R 10ckt 300mm disc Sn
2196581104	600±10	15	CGRID III R-R 10ckt 600mm disc Sn

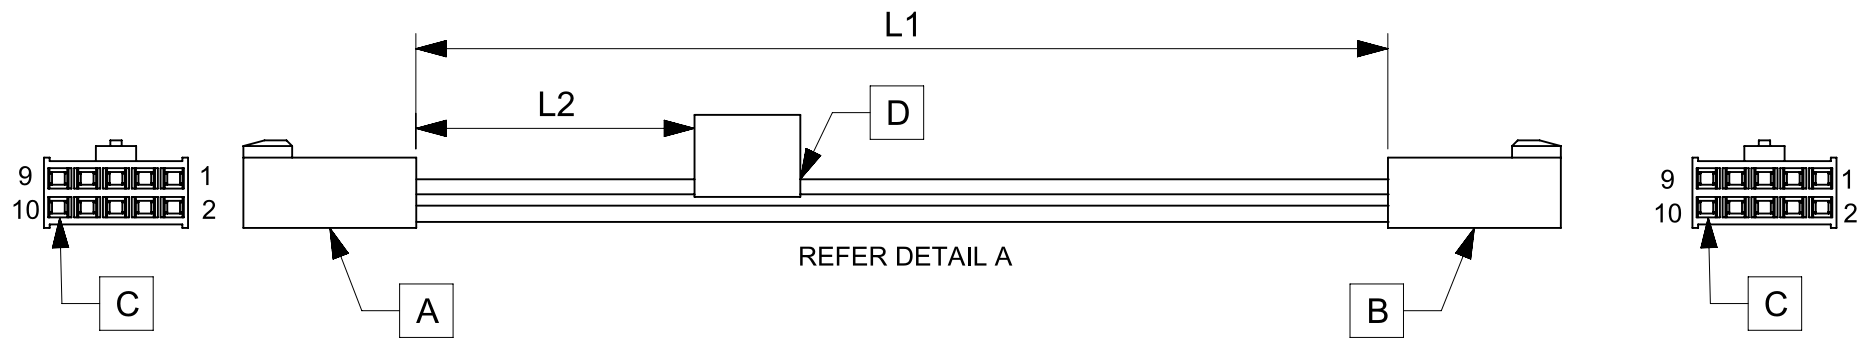

NOTES

1. Cable assembly must pass 100% continuity and polarity test.
2. Connector view shown is from mating side.
3. Label text must be 2mm max. in height with Arial font.
4. Label must be wrapped in Flag type on a single cable.

REVISION			
DATE	REV	DESCRIPTION	CHANGER
2021/12/27	A	INITIAL RELEASE	SAIKIG

DOCUMENT STATUS	P1	RELEASE DATE	2022/01/13 11:15:19
-----------------	----	--------------	---------------------

FUNCTIONAL SYMBOLS $\nabla_A = 0$ $\nabla_E = 0$ $\nabla_P = 0$	DIMENSION UNITS: mm SCALE: NTS	CURRENT REV DESC: EC NO: 690898 DRWN: SAIKIG CHK'D: MNARAYAN01 APPR: MNARAYAN01					
	GENERAL TOLERANCES (UNLESS SPECIFIED) ANGULAR TOL ± °					2021/12/27 2022/01/13 2022/01/13	
	DIVISIONAL SYMBOLS 4 PLACES ± 3 PLACES ± 2 PLACES ± 1 PLACE ± 0 PLACES ±	INITIAL REVISION: DRWN: SAIKIG APPR: MNARAYAN01		DOCUMENT NUMBER 2196581102	DOC TYPE PSD	DOC PART 000	REVISION A
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION	DRAWING A4-SIZE	SERIES 219658	MATERIAL NUMBER SEE TABLE	CUSTOMER GENERAL MARKET