


Product Details for 141 - 1001 - 0001

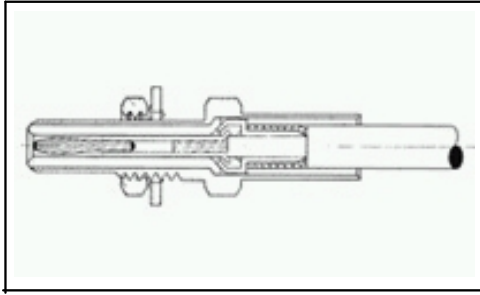

141 - 1001 - 0001

Tyco Part Number: 1 - 1532006 - 9

[Active](#)

Ultra Miniature (LEPRA/CON) RF Connectors

[RoHS Compliant \(Statement of Compliance\)](#)

Product Highlights:

- ? Connector
- ? Jack
- ? Terminate To Coaxial Cable
- ? Coupler Style = Slide -On
- ? Coaxial Cable Termination Type = Crimp

[View all Features](#)

Quick Links

- [Check Pricing & Availability](#)
- [Search for Tooling](#)
- [Product Feature Selector](#)
- [Contact Us About This Product](#)

Documentation & Additional Information

Product Drawings:

- ? [JACK, SLIDE -ON, BULKHEAD LEPRA/CON](#) (PDF, English)

Catalog Pages/Data Sheets:

- ? None Available

Product Specifications:

- ? None Available

Application Specifications:

- ? None Available

Instruction Sheets:

- ? [LEPRA/CON Slide -On Series Straight Plugs and Jacks](#) (PDF, English)

CAD Files:

- ? None Available

Additional Information:

- ? [Product Line Information](#)

Related Products:

- ? [Tooling](#)

[List all Documents](#)

Product Features (Please use the Product Drawing for all design activity)

Product Type Features:

- ? Product Type = Connector
- ? Gender = Jack
- ? Body Style = Straight
- ? Safety Wire Holes = Without
- ? Grade = Commercial
- ? Body Material = Brass
- ? Panel Thickness (mm [in]) = 2.36 [0.093]

Mechanical Attachment:

- ? Panel Attachment = With
- ? Panel Attachment Style = Rear Mount
- ? Panel Attachment Method = Lockwasher and Nut

Electrical Characteristics:

- ? Connector Impedance (?) = 50
- ? Solderless = Yes

Termination Related Features:

- ? Coaxial Cable Termination Type = Crimp

Body Related Features:

- ? Coupler Style = Slide -On
- ? Locking Interface = Without
- ? Body Plating = Gold per MIL -G-45204, Type II, Grade C, Class 1

Contact Related Features:

- ? Center Contact Plating = Gold per MIL -G-45204, Type II, Grade C, Class 1

Configuration Related Features:

- ? Coaxial Cable Type = RG 178/U, RG 196/U

Industry Standards:

- ? [RoHS/ELV Compliance](#) = RoHS compliant, ELV compliant
- ? [Lead Free Solder Processes](#) = Wave solder capable to 240°C, Wave solder capable to 260°C, Wave solder capable to 265°C
- ? RoHS/ELV Compliance History = Always was RoHS compliant

Conditions for Usage:

- ? Terminate To = Coaxial Cable

Other:

- ? Brand = Microdot