


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
H	-				
B		ECR-15-010046	13JUL15	SW	RZ

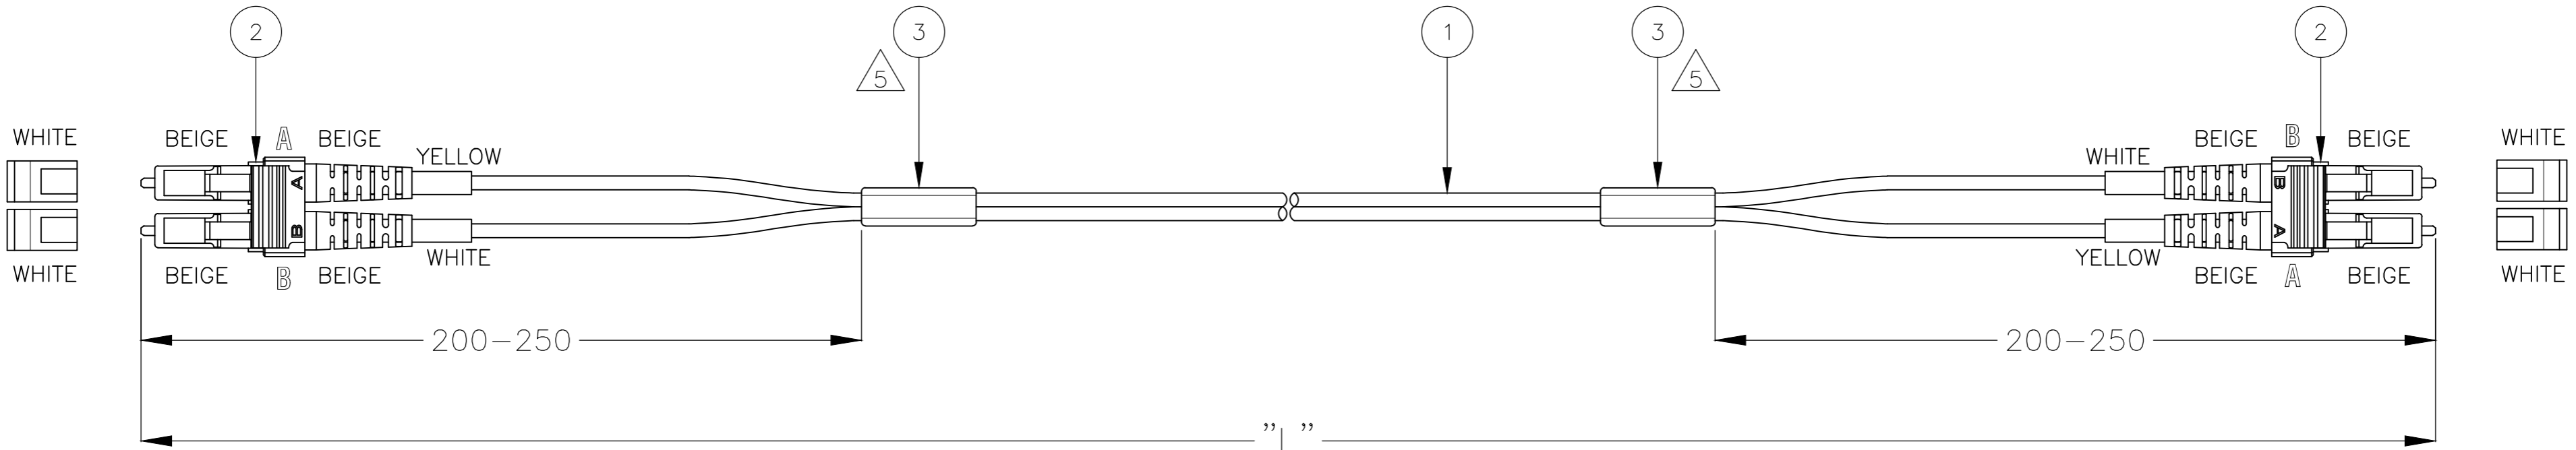

ASSEMBLY CONNECTIVITY	
LC CONN.	LC CONN.
YELLOW (A)	WHITE (B)
WHITE (B)	YELLOW (A)

STANDARD LENGTHS ACCORDING TO CUSTOMER DRAWING 1206850	
PART NUMBER	"L" (meter)
X-2061528-Y	XY.0

NOTES:

- 1 ATTENUATION  $\leq 0.3$  dB, MEASURED AT 850 nm ACCORDING TO I.E.C. 61300-3-4 INSERTION METHOD B
- 2 RETURN LOSS  $\geq 20$  dB, IN MATED CONDITION AGAINST REFERENCE CONNECTOR AT 850 nm
- 3 FILLED OUT TEST RESULT SHEET SUPPLIED WITH EACH INDIVIDUALLY PACKED ASSEMBLY
- 4 CABLE INFORMATION:
  - CORE DIAMETER: 62.5/125  $\mu\text{m}$  (2x)
  - OUTER JACKET DIAMETER: 1.8 x 3.6 mm
  - OUTER JACKET COLOUR: GREY
  - OUTER JACKET MATERIAL: LSZH
- 5 BLANK LABEL  
ONLY ONE LABEL IN THE MIDDLE OF THE CABLE IS USED FOR LENGTHS < 0.6 METER

Qty	Description	Item
2	BLANK LABEL	3
2	LC DUPLEX CONNECTOR, ULTRA SHORT, MULTI MODE, BEIGE	2
L	FOCAB 1.8MZ 62.5/125, GREY, LSZH	1

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R. COOLEN 13APR2011		FIBER OPTIC LEAD 1.8MZ	
DIMENSIONS: mm		CHK R. GROENEVELD 01JUN2011		LC/DPX - LC/DPX ULTRA SHORT	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD A. HENGELMOLEN 01JUN2011		MULTI MODE 62.5/125	
0 PLC $\pm 1.0$		PRODUCT SPEC		SIZE A2	CAGE CODE 00779
1 PLC $\pm 0.5$		APPLICATION SPEC	SCALE NTS	SHEET 1 of 1	REV B
2 PLC $\pm -$		WEIGHT -	CUSTOMER DRAWING		
3 PLC $\pm -$		FINISH -			
4 PLC $\pm -$					
ANGLES $\pm -$					