
PROPRIETARY INFORMATION		ΓΙΟN:
	PROPRIESE PALCE OF CREEKE PAC	

PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC.

REVISION					
REV	DESCRIPTION	DATE	APPROVED		
A	INITIAL RELEASE, RFS. 20714, EM	04/11/11	HM		
В	CHANGE SHAPE OF IEC 320 /C5 CONNECTOR, RFS. 21475, EM	08/24/11	HM		

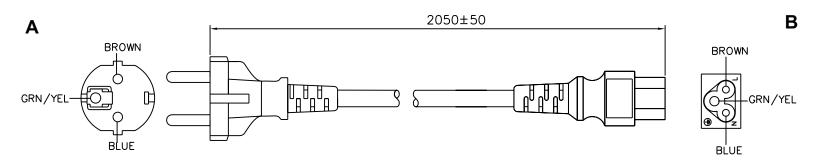

## **GENERAL SPECIFICATIONS:**

RATING: 2.5A / 250V AC

CABLE TYPE / SIZE: H05VV-F, 3 x 0.75 mm<sup>2</sup>

**TEMPERATURE RATING:** 70° C

**CONDUCTOR COLORS:** BROWN / BLUE/ GREEN-YELLOW

CABLE JACKET COLOR: PMS 11C, COOL GRAY

2050 ± 50 mm OVERALL LENGTH (L): CABLE OUTER DIAMETER:  $6.8 + 0.1 \, \text{mm}$ 


CEE 7/7, COLOR PMS 11C, COOL GRAY END 'A' PLUG; END 'B' IEC-320 / C5, COLOR PMS 11C, COOL GRAY APPROVALS PLUG: VDE, N, S, D, FI, KEMA, UTE, CEBEC, OVE, IMQ APPROVALS CABLE: VDE, N. S. D. FI, KEMA, SEV, CEBEC, OVE.

APPROVALS CONNECTOR: VDE, N, S, D, FI, KEMA, UTE, CEBEC, OVE, IMQ, ASEV

## **PACKING:**

HANKING

L = 200 ± 10 mm





## NOTES:

1. CORD, PLUG AND CONNECTOR MUST BE MARKED WITH APPROVAL SYMBOLS OR FILE NUMBER(S).

