
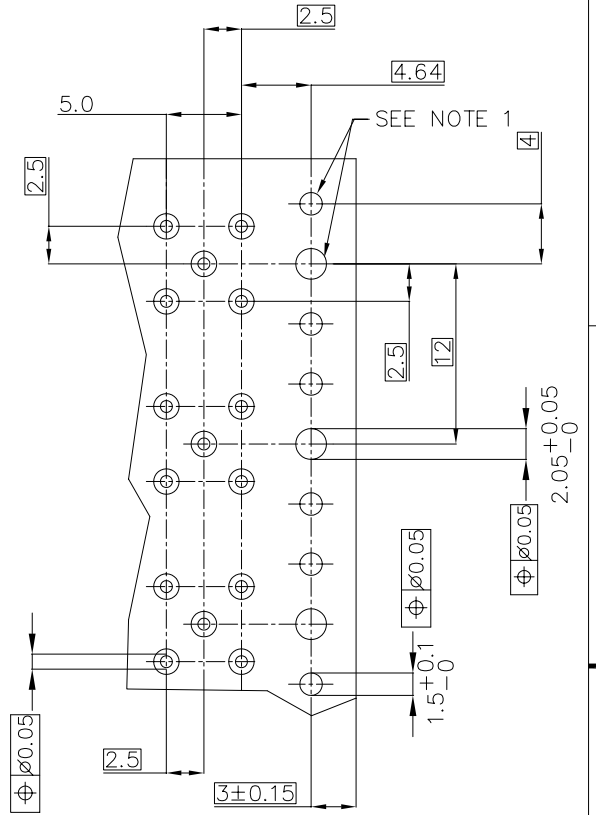


PRODUCT NO	PCB THICKNES	DIM A	NOTES
63721-101	1.6 & 2.4	4.19	3
63721-102	1.6 & 2.4	4.19	2 & 3

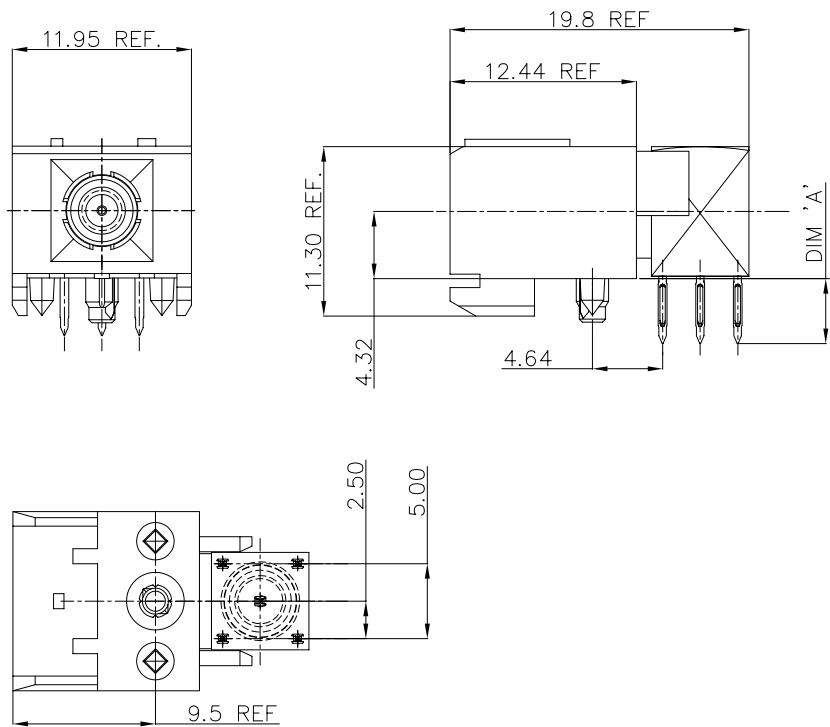

- ① INDICATED HOLES ARE TO BE UNPLATED
- ② COMPONENTS SUPPLIED UNASSEMBLED
- ③ ADD "LF" SUFFIX AT THE END OF PART NUMBER FOR LEAD FREE OPTION.
- ④ THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATION AS DESCRIBED IN GS-22-008.
5. THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 15 SECONDS IN A WAVE SOLDER APPLICATION WITH A 1.5mm MINIMUM THICK CIRCUIT BOARD OR FOR 20 SECONDS IN A CONVECTION, INFRA-RED OR VAPOR PHASE REFLOW OVEN. SEE APPLICATION NOTES/PROCEDURES IF THEY ARE AVAILABLE.

PRESS FIT HOLES	
HOLE DIAMETER AFTER PLATING	0.65 - 0.80
DRILLED HOLE	0.81 - 0.86 (0.85 DRILL)
COPPER PLATING	0.025 MIN
TIN PLATING	0.005 - 0.015

mat'l. code		surface ISO 1302 <input checked="" type="checkbox"/>		tolerance ISO 406 ISO 1101		projection		product family METRAL (tm)	
ltr		ecn no		dr		date		tolerances unless otherwise specified	
A		V81487		GCR		9/03/98		xx ±.01/.3	
B		V94348		HTB		11/16/99		xxx ±.005/.13	
C		M06-0286		MNR		7/27/06		xxxx ±.0020/.050	
D		M07-0101		MHT		2/09/07		dr	
								M. FETROW 7/16/98	
								enr C. PENDLETON 9/03/98	
								chr C. PENDLETON 9/03/98	
								app dC. PENDLETON 9/03/98	
sheet index		revision sheet		D		1		scale 1:1	

RIGHT ANGLE COAX ASSEMBLY

63721

sheet 1 of 1 size A3

type Product Customer Drawing



Copyright FCI