


TS PLUG AND TS PLUG WIRING CHART							
JACKET COLOR	H.S. TUBING MARKING	END "A" TS PLUG			END "B" TS PLUG		
		RED	BLACK	BARE	RED	BLACK	BARE
BROWN	CHANNEL 1	TIP	N.C.	SLEEVE	TIP	N.C.	SLEEVE
RED	CHANNEL 2	TIP	N.C.	SLEEVE	TIP	N.C.	SLEEVE
ORANGE	CHANNEL 3	TIP	N.C.	SLEEVE	TIP	N.C.	SLEEVE
YELLOW	CHANNEL 4	TIP	N.C.	SLEEVE	TIP	N.C.	SLEEVE
GREEN	CHANNEL 5	TIP	N.C.	SLEEVE	TIP	N.C.	SLEEVE
BLUE	CHANNEL 6	TIP	N.C.	SLEEVE	TIP	N.C.	SLEEVE
PURPLE	CHANNEL 7	TIP	N.C.	SLEEVE	TIP	N.C.	SLEEVE
GRAY	CHANNEL 8	TIP	N.C.	SLEEVE	TIP	N.C.	SLEEVE

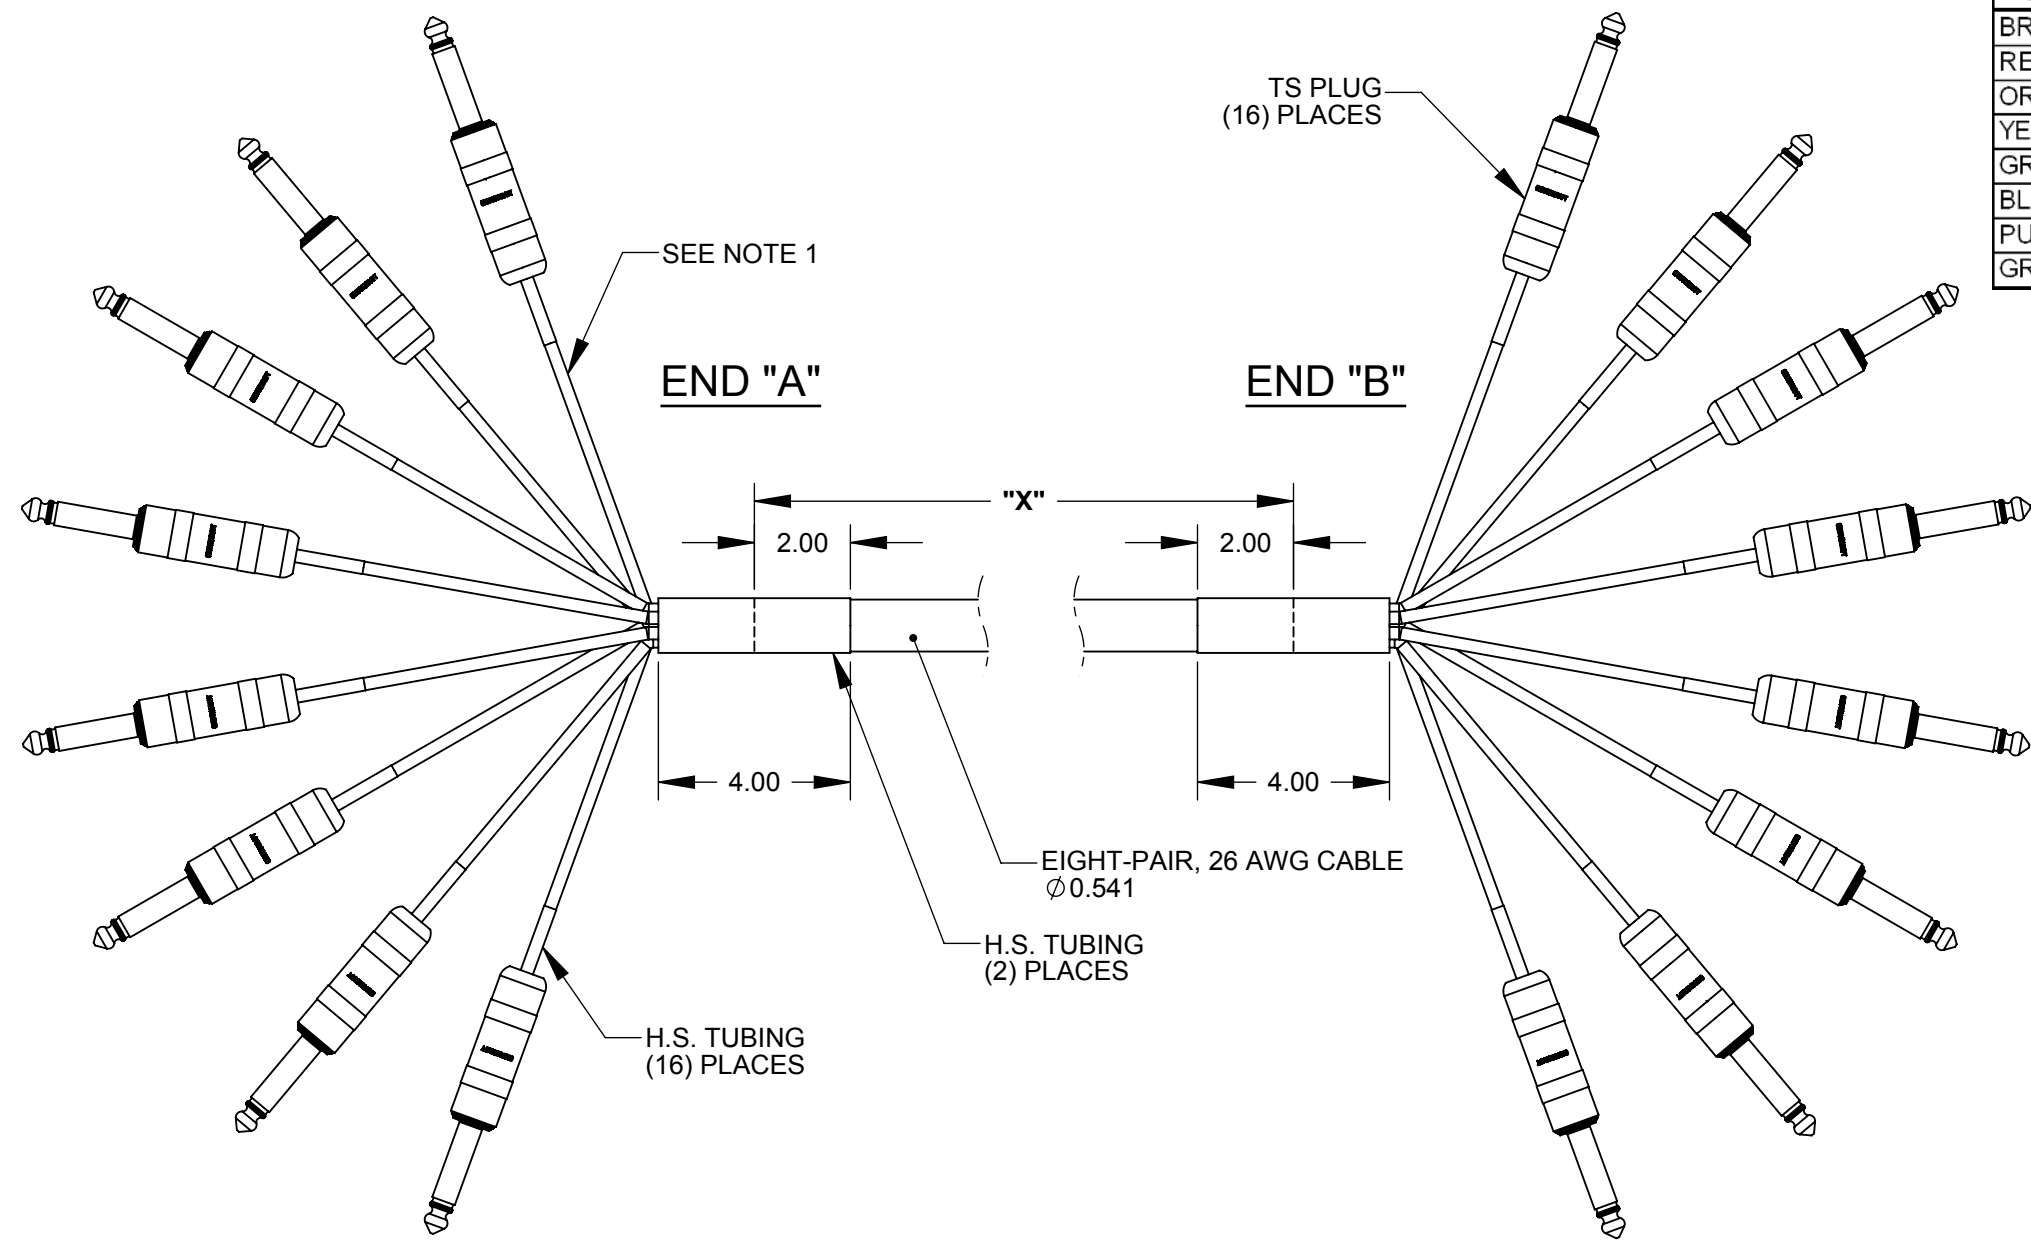

PART NUMBER	CABLE LENGTH "X"
TS05TS	5.00 FT +/- 1.50 IN
TS10TS	10.00 FT +/- 1.50 IN

CUSTOMER DRAWING

NOTES:

- CABLE BREAKOUT LENGTH IS 18.00 +/- 0.75 IN.
- CABLE IS SHIPPED COILED AND PACKAGED IN A BAG.
- MATERIALS:
 TS PLUG:
 SOLDER AND CLAMP TERMINAL - COPPER ALLOY, TIN PLATED
 TIP ROD, PLUG BODY AND HANDLE- COPPER ALLOY, NICKEL PLATED
 TUBULAR INSULATOR - MYLAR
 INSULATING WASHERS - THERMOPLASTIC
 HEAT SHRINK TUBING - THERMOPLASTIC
 CABLE - COPPER, THERMOPLASTIC
- THIS PRODUCT IS RoHS COMPLIANT.

REV	ECO NUMBER	DATE	BY	APVD
B	26637	10/11/10	RS	TJK
A	25983	10/30/08	RS	TJK

UNLESS OTHERWISE SPECIFIED

1. ALL DIMENSIONS IN INCHES
 - TWO PLACE DECIMALS ±0.02
 - THREE PLACE DECIMALS ±0.005

DO NOT SCALE DRAWING

THIS DRAWING DESCRIBES A DESIGN CONSIDERED PROPRIETARY IN NATURE, DEVELOPED AND MANUFACTURED BY SWITCHCRAFT INC. AND IS RELEASED ON A CONFIDENTIAL BASIS FOR IDENTIFICATION PURPOSES ONLY.							
SIZE	WIDTH	MULT	LBS/M	TEMPER			
FINISH SPEC No.				MATERIAL SPEC No.			
FIRST USED ON			SCALE 1:2				
DATE DRAWN	BY	CHKD	APVD				
4/14/08	JGK	RS	TJK				
		1/3/11	1/4/11				
NAME				PART No.		REV	
TS PLUG TO TS PLUG, RoHS				TS__TS		B	