

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION


ALL INTERNATIONAL RIGHTS RESERVED.

© COPYRIGHT

LOC J DIST -

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
D6		REVISED PER ECR-19-017851	26NOV19	SM	DZ
E			17DEC20	MG	DZ

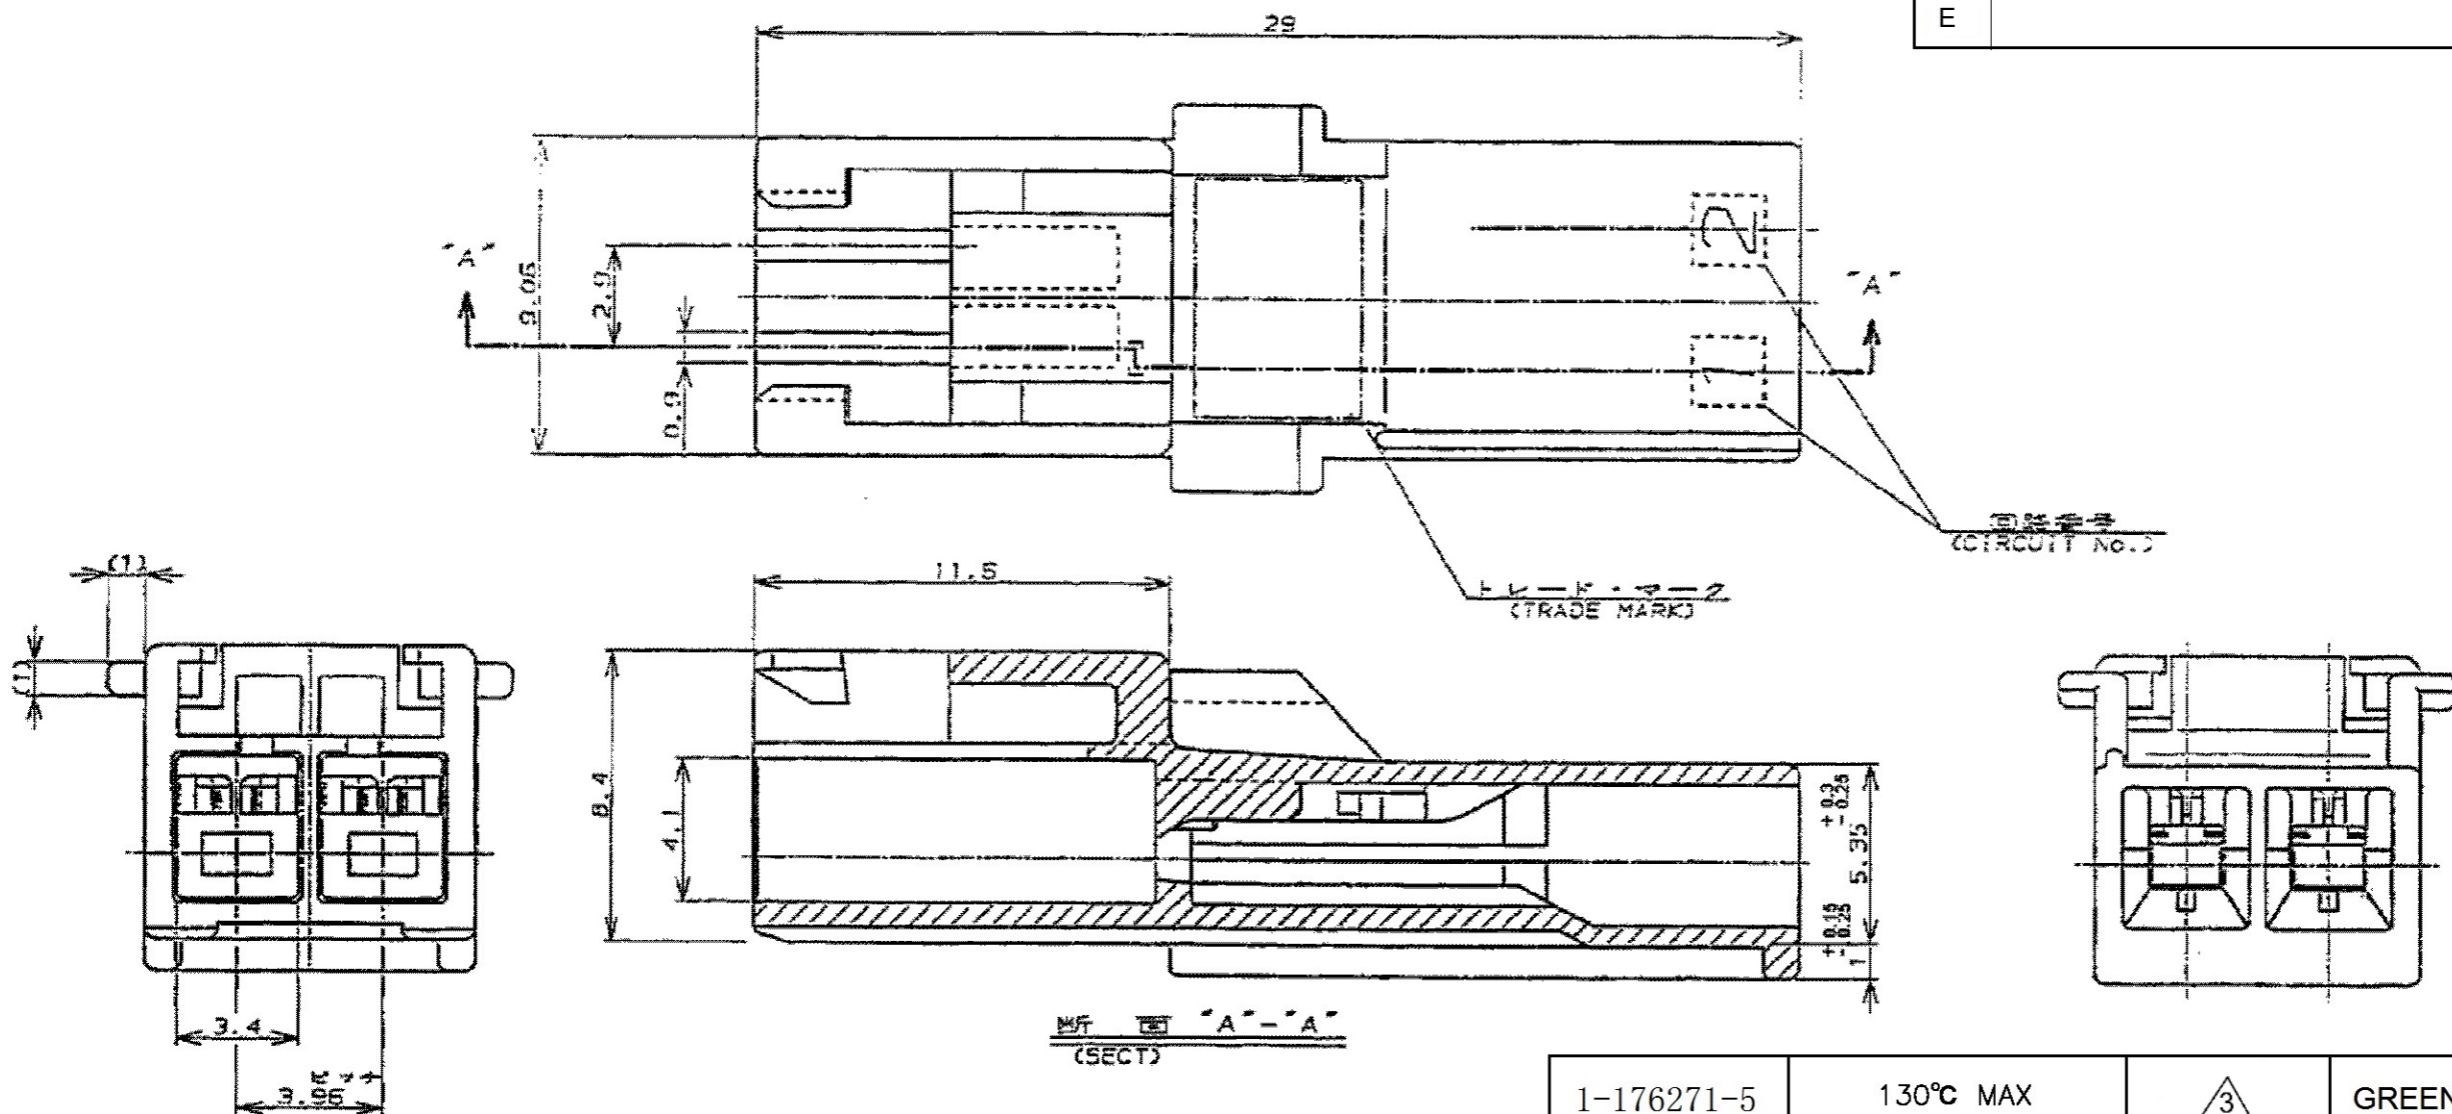

1. APPLICABLE CONTACT PART NUMBER;

TAB CONTACT: 175150-□ (#20-#16AWG)

175149-□ (#26-#22AWG)

2. TO BE USED WITH THE CONTACT WHICH IS RATED 105°C MAX

3. MATERIAL: PA66, UL94 V-0, GWIT 775°C

1. 適用端子型番;

リセコンタクト: 175150-□ (#20-#16AWG)

175149-□ (#26-#22AWG)

2. 適用コンタクトの使用温度は最大105°C

1-176271-5	130°C MAX	3	GREEN 绿	2	1-176282-5
1-176271-1	130°C MAX	3	NATURAL 自然色		1-176282-1 2
176271-□	105°C MAX	PA66	BLACK 黒	176282-9	
			BLUE 青		176282-6
			YELLOW 黄		176282-4
			RED 赤		176282-2
			NATURAL 自然色		176282-1
MATING CONN. PART NUMBER 嵌合相手型番	TEMPERATURE RATING 定格温度	TYPE 種類	HOUSING COLOR 色	Pos. 極数	PART NUMBER 型番

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED: ≤10 ±0.2 10<, ≤30 ±0.25 30< ±0.3	DWN Y.NARISAWA 19NOV1990	TE TE Connectivity
	ANGLES FINISH ±3°	CHK Y.FUJITA 19NOV1990	
MATERIAL SEE TABLE		APVD N.ONOUE 20NOV1990	NAME AMP UNIVERSAL POWER CONN. 3.96mm PITCH CAP HOUSING 2 Pos. (SGL ROW) AMP ユニバーサルパワーコネクタ 2極 3.96mmピッチ キャップハウジング
		PRODUCT SPEC 108-5302	SIZE CAGE CODE DRAWING NO RESTRICTED TO
		APPLICATION SPEC 114-5142	A300779 C-176282
		WEIGHT	SCALE NTS SHEET 1 OF 1 REV E

RESTRICTED CUSTOMER