


1 CHART-1 POLARIZATION

NO. 1... (+)	POWER
NO. 2... (+)	SIGNAL
NO. 3... (-)	POWER

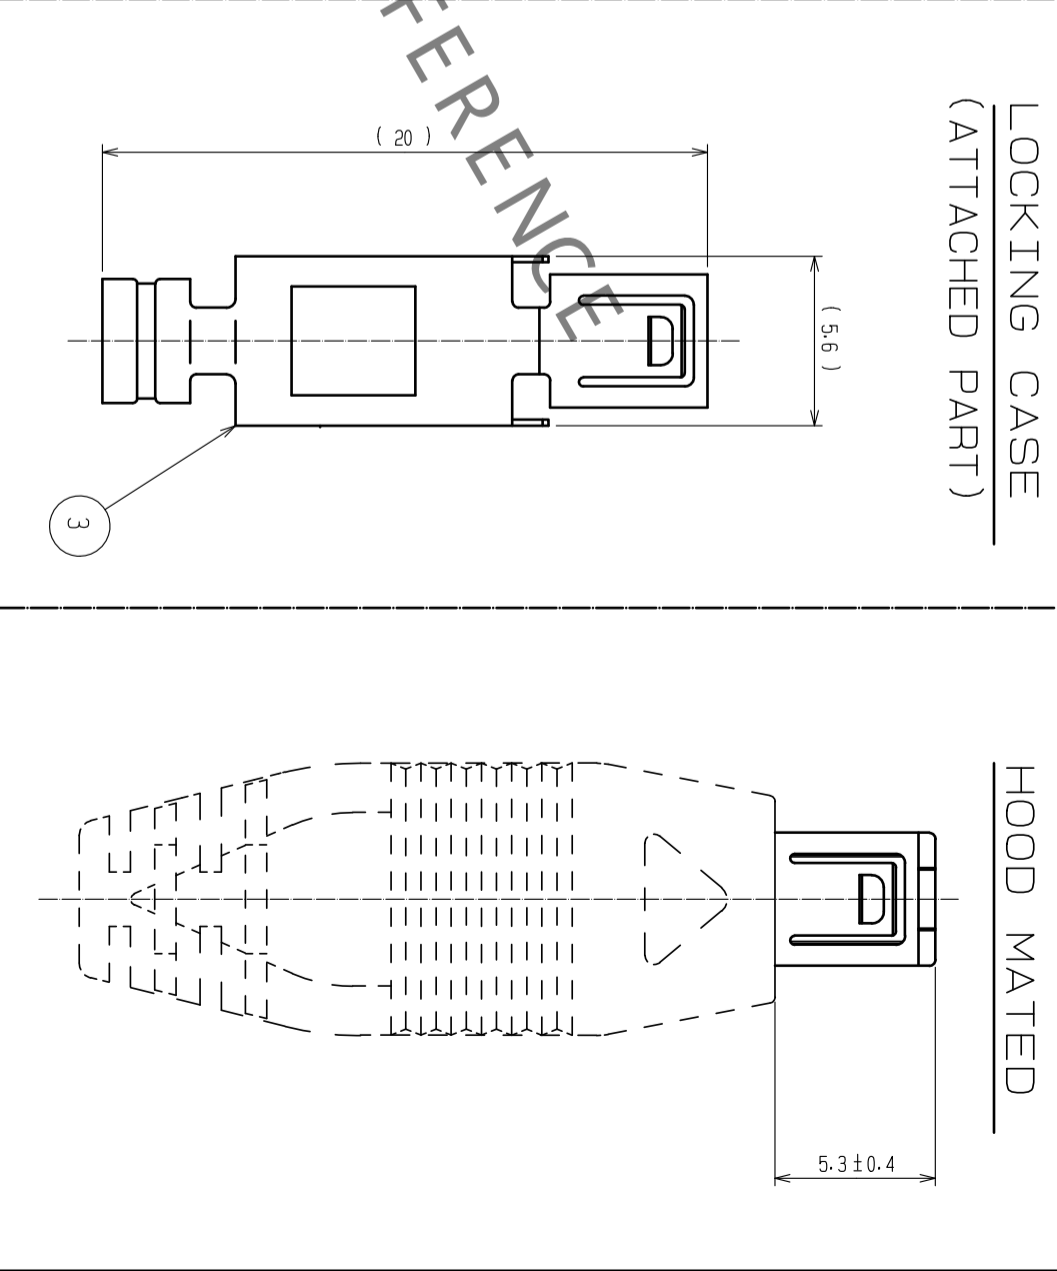

- NOTES
- 1 POLARIZATION IS AS SHOWN ON CHART-1.
 - 2 TERMINAL AREA SHALL BE COVERED WITH SHRINKAGE TUBE AFTER SOLDERING.
 - 3 DIRECTIONS FOR USE.
- *PLEASE DO NOT USE FOR THE PURPOSE OF INTERRUPTING THE CURRENT.

1	COPPER ALLOY	CONTACT AREA : PALLADIUM-NICKEL 0.7mm MIN. + GOLD 0.2um MIN. LEAD AREA : GOLD 0.03um MIN. UNDER PLATING : NICKEL1.27um MIN.	3	STAINLESS STEEL	
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS
UNITS	SCALE	COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED
mm	4 : 1				DATE
APPROVED : NM. NISHIMATSU		15.10.27		DRAWING NO.	
CHECKED : KN. ICHIKAWA		15.10.27		EDC-120678-31-00	
DESIGNED : TS. ITO		15.10.27		PART NO.	
DRAWN : AK. AKIYAMA		15.10.27		M0172-3SA-CV(31)	
				CODE	
				CL206-0951-7-31	