



used for: DIN EN 60603 TYPE "D"

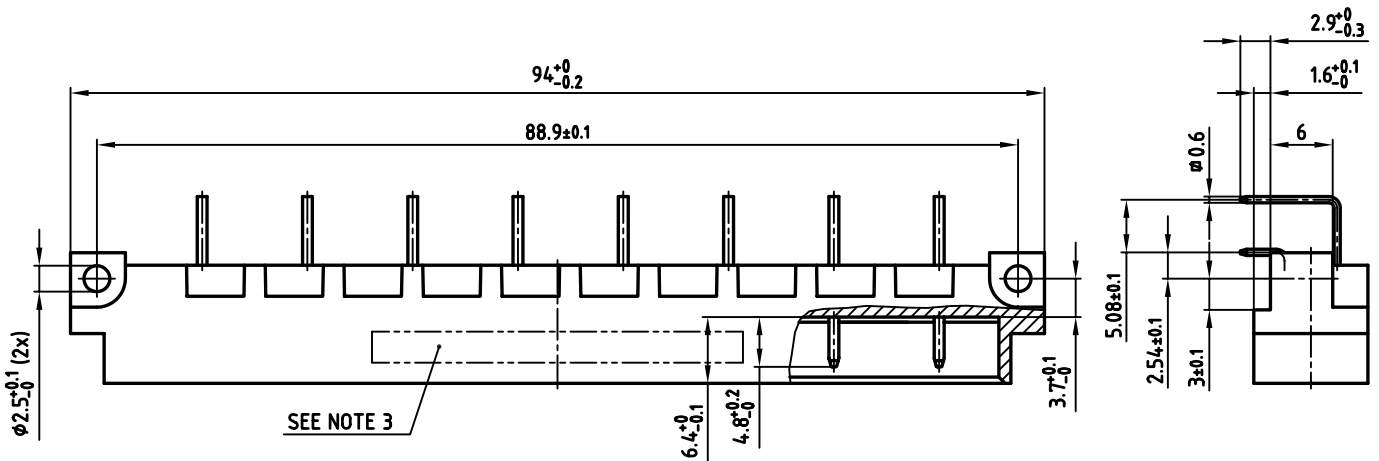


NOTES:

1. INSULATORS: PBTP GF UL 94 V-0, GREY
2. CONTACTS: COPPER ALLOY
PLATING: GOLD OVER NICKEL
50 MATING CYCLES
3. CONNECTOR IS PART MARKED: 121A10639X CONEC ABC

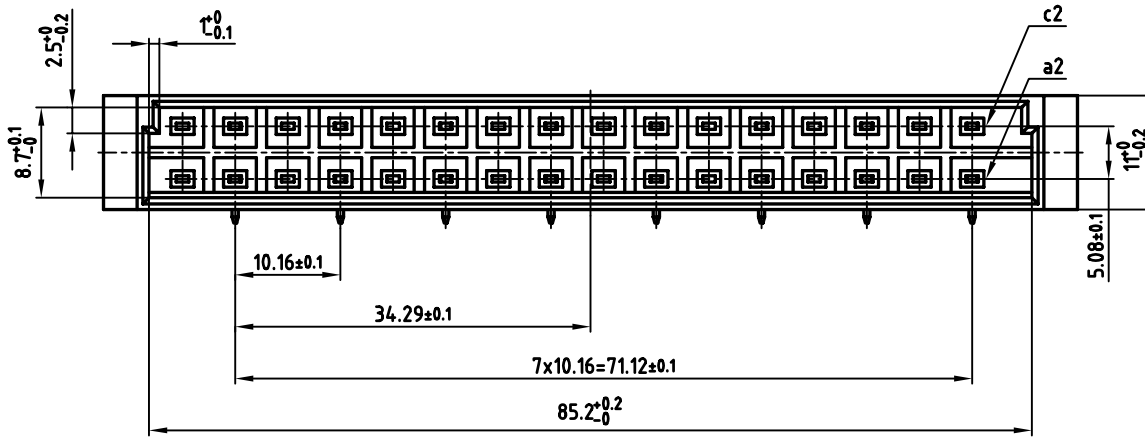

P.C.B.-HOLE DRILLINGS

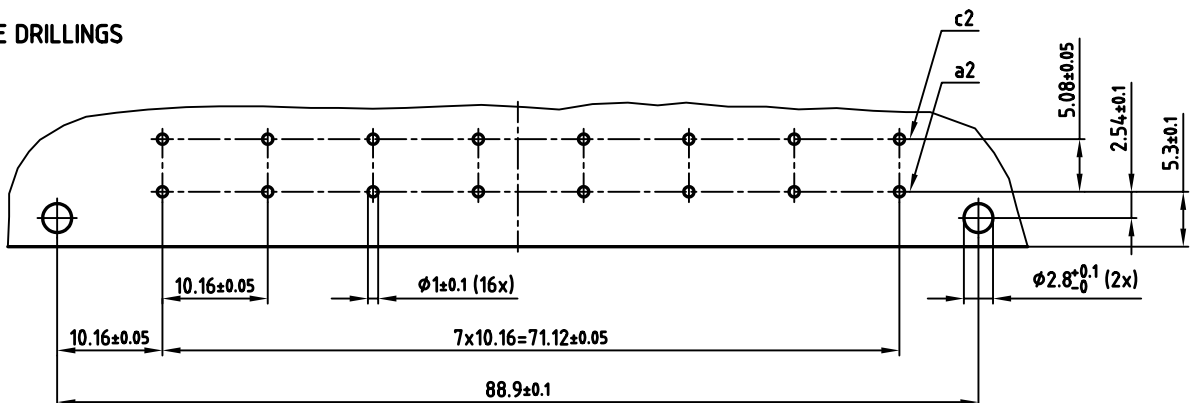

APPROVAL # FREIGABE # DEBLOCAGE # AUTORIZACION # APPROVAL

CUSTOMER APPROVAL DATE:

NAME: TITLE:

COMPANY NAME:

APPROVAL # FREIGABE # DEBLOCAGE # AUTORIZACION # APPROVAL

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY, WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC Gmbh DO NOT ALTER CAD DRAWING BY HAND

rev.	description	date	name

tolerance		scale:	2:1
	dim. in mm	material:	SEE NOTES
2005	date	name	title:
drawn	04.11.	Lehmenkühler	MALE CONNECTOR TYPE "D"
appd.	04.11.	Mickenbecker	16pos. ANGLED
norm	DIN EN 60603		
d-old			
		dwg no:	AutoCAD 2004
			DIN-A
			3
			sh: 1/1
		part no:	121A10639X

dwg no: AutoCAD 2004

12K1A405

part no: 121A10639X