


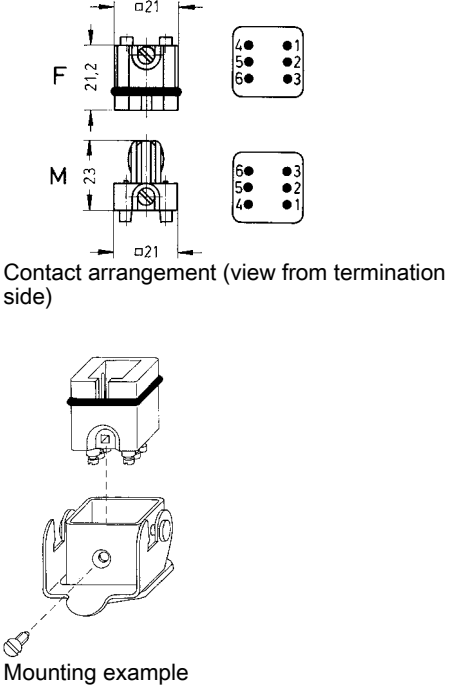


Number of contacts

6

10 A 25 V 0.8 kV 3

Staf

Identification	Conductor cross-section (mm <sup>2</sup> )	Part number		Drawing (dimensions in mm)
		Male	Female	
Staf®, Screw termination, Contact surface: Silver plated 	1.5	09 70 006 2813	09 70 006 2616	 <p>Contact arrangement (view from termination side)</p>
Staf®, Solder termination, Contact surface: Silver plated 	2.5	09 70 006 2812	09 70 006 2615	 <p>Contact arrangement (view from termination side)</p> <p>Mounting example</p>