
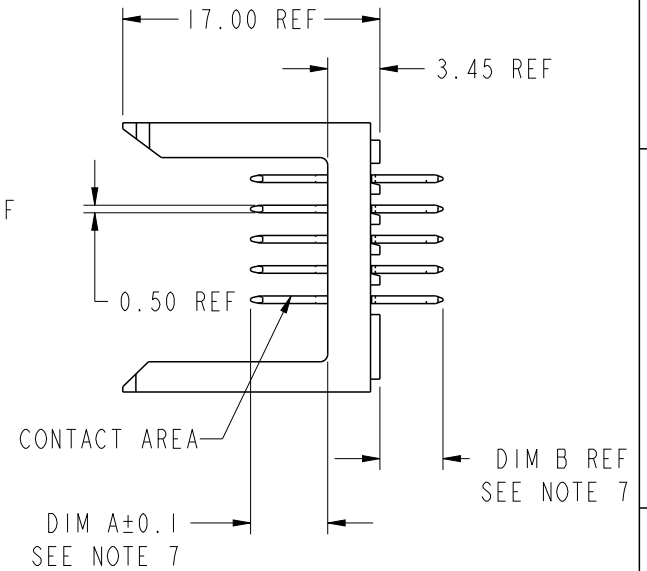
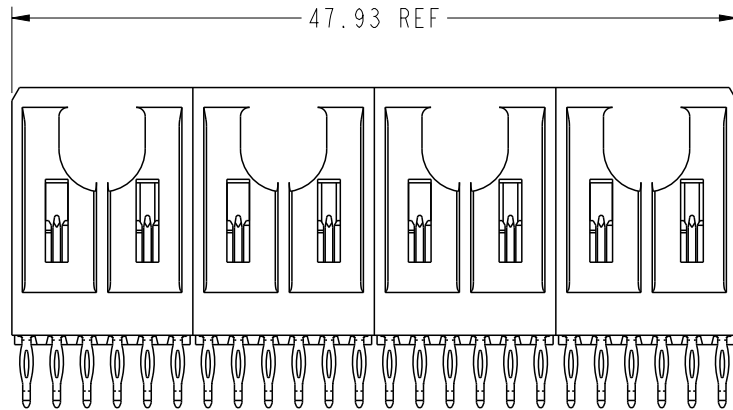


PRODUCT NUMBER
85854-XYX(L)LF
OR
85854-XXXX(L)LF

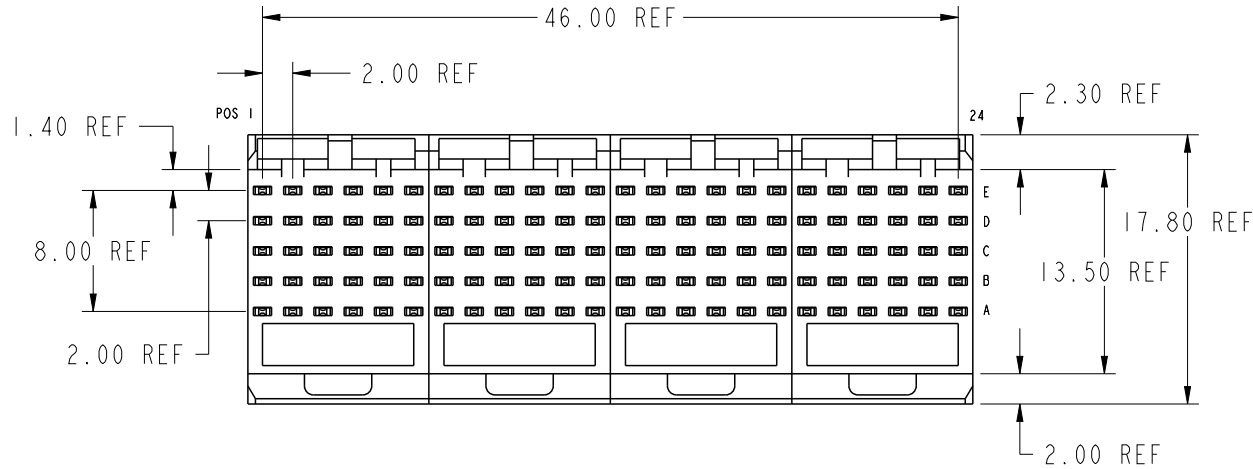


PART NUMBER : 85854-XYX(L)LF

L REFER LUBRICATED (OPTIONAL)
SEE NOTE 3

X REFER PLATING PERFORMANCE
SEE NOTE 3

spec ref	*	dr	Terran Huang	2010/07/09	projection	MM	size	A4	scale	11:10	
tolerance std	TOLERANCES UNLESS OTHERWISE SPECIFIED	eng	Rahul Mohan-M	2021/08/25			← →	ecn no	ELX-I-41565-1		
ISO 406 ISO 1101		chr	-	-				product family	METRAL	rel level	Released
surface	3.200	appr	Kuriakose, San	2021/08/25			product family	METRAL	rel level	Released	
ISO 1302	linear	0.X	±0.3	Amphenol FCi	title		METRAL SIGNAL HEADER		dwg no	85854	rev
		0.XX	±0.13		4 MOD, 5 ROW PRESS-FIT		Product - Customer Drw	sheet 1 of 20			
	angular	0°	±2°		cat. no.	-					
		amphenol-icc.com				Product - Customer Drw		sheet 1 of 20			

Creo F114-ELX-NC-AAC, REV F, 2020-12-21

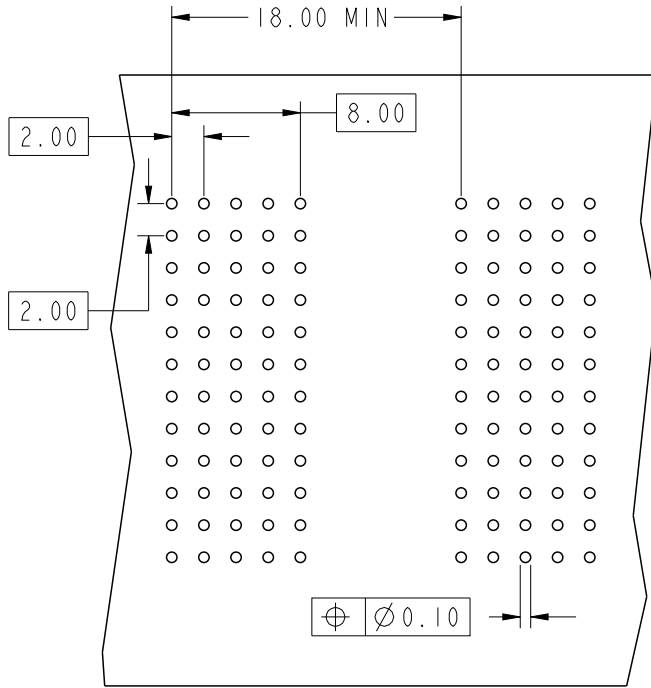

REQUIRED PC BOARD LAYOUT
COMPONENT SIDE
SEE PRINT 58351 FOR
ADDITIONAL PCB INFORMATION

KEY		
CODE	DIMENSIONS	
	DIM "A" MATE	DIM "B" TAIL
1	5.00	4.30
2	5.75	4.30
3	6.50	4.30
4	7.25	4.30
5	5.00	13.60
6	5.75	13.60
7	6.50	13.60
8	7.25	13.60
9	5.00	17.00
10	5.75	17.00
11	6.50	17.00
16	7.00	4.30
19	8.00	4.30
20	8.00	13.60
21	8.00	17.00
25	5.75	15.60
39	8.00	14.40
44	5.75	12.10
49	5.75	15.10
52	8.00	15.10
54	5.00	11.50

spec ref	*	dr	Terran Huang	2010/07/09	projection 	MM 	size	A4	scale	21:10
tolerance std	TOLERANCES UNLESS OTHERWISE SPECIFIED	eng	Rahul Mohan-M	2021/08/25			ecn no	ELX-I-41565-1		
ISO 406 ISO 1101		chr	-	-			rel level	Released		
surface	3.200	appr	Kuriakose, San	2021/08/25	product family	METRAL	rev			
ISO 1302	linear	0.X	±0.3	Amphenol FCI	title	METRAL SIGNAL HEADER	dwg no	85854	rev	DJ
		0.XX	±0.13							
		0.XXX	±0.050							
	angular	0°	±2°	amphenol-icc.com	cat. no.	-	Product - Customer Drw	sheet 2 of 20		

A

B

C

D

A

B

C

D

Table with METRAL P/N 85854-X57LF, CONTACT CODE MOD. 1, MOD. 2, MOD. 3, MOD. 4. Rows E, D, C, B, A.

Table with METRAL P/N 85854-X61LF, CONTACT CODE MOD. 1, MOD. 2, MOD. 3, MOD. 4. Rows E, D, C, B, A.

Table with METRAL P/N 85854-X58LF, CONTACT CODE MOD. 1, MOD. 2, MOD. 3, MOD. 4. Rows E, D, C, B, A.

Table with METRAL P/N 85854-X62LF, CONTACT CODE MOD. 1, MOD. 2, MOD. 3, MOD. 4. Rows E, D, C, B, A.

Table with METRAL P/N 85854-X59LF, CONTACT CODE MOD. 1, MOD. 2, MOD. 3, MOD. 4. Rows E, D, C, B, A.

Table with METRAL P/N 85854-X63LF, CONTACT CODE MOD. 1, MOD. 2, MOD. 3, MOD. 4. Rows E, D, C, B, A.

Table with METRAL P/N 85854-X60LF, CONTACT CODE MOD. 1, MOD. 2, MOD. 3, MOD. 4. Rows E, D, C, B, A.

Table with METRAL P/N 85854-X64LF, CONTACT CODE MOD. 1, MOD. 2, MOD. 3, MOD. 4. Rows E, D, C, B, A.

Product specifications table including: spec ref, tolerance std (ISO 406, ISO 1101, ISO 1302), surface, linear/angular, tolerances, dr (Terran Huang), eng (Rahul Mohan-M), chr, appr (Kuriakose, San), projection, size (A4), scale (1:10), ecn no (ELX-I-41565-1), rel level (Released), product family (METRAL), title (METRAL SIGNAL HEADER), cat. no, product - Customer Drw, sheet 10 of 20, rev (DJ).

A

METRAL P/N	ROW	CONTACT CODE MOD. 1					MOD. 2					MOD. 3					MOD. 4							
		1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23
85854-X81LF	E	2	2	2	2	2	4	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2
	D	2	2	2	2	2	4	2	2	2	2	2	2	2	2	2	2	4	2	2	2	2	2	2
	C	2	2	2	2	2	4	2	2	2	2	2	2	2	2	2	2	4	2	2	2	2	2	2
	B	2	2	2	2	2	4	2	2	2	2	2	2	2	2	2	2	4	2	2	2	2	2	2
	A	2	2	2	2	2	4	2	2	2	2	2	2	2	2	2	2	4	2	2	2	2	2	2

B

METRAL P/N	ROW	CONTACT CODE MOD. 1					MOD. 2					MOD. 3					MOD. 4							
		1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23
85854-X82LF	E	2	-	2	-	2	-	2	-	2	-	2	-	2	-	2	-	2	2	2	2	2	2	2
	D	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	2	2	2	2	2	2
	C	2	-	2	-	2	-	2	-	2	-	2	-	2	-	2	-	2	2	2	2	2	2	2
	B	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	2	2	2	2	2	2
	A	2	-	2	-	2	-	2	-	2	-	2	-	2	-	2	-	2	2	2	2	2	2	2

C

METRAL P/N	ROW	CONTACT CODE MOD. 1					MOD. 2					MOD. 3					MOD. 4							
		1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23
85854-X83LF	E	3	19	3	19	3	19	3	19	3	19	3	19	3	19	3	19	3	19	3	19	3	19	3
	D	4	19	3	19	3	19	3	19	3	19	3	19	4	19	3	19	3	19	3	19	3	19	3
	C	1	19	19	19	19	3	19	19	19	19	3	19	19	19	19	3	19	19	19	19	3	19	19
	B	4	19	4	19	1	19	1	19	1	19	1	19	19	19	1	19	19	19	19	19	19	19	19
	A	19	1	1	1	1	1	1	1	1	1	1	19	19	19	19	19	1	19	1	19	1	19	19

D

spec ref	*		dr	Terran Huang	2010/07/09		size	A4	scale	1:10				
tolerance std	TOLERANCES UNLESS OTHERWISE SPECIFIED		eng	Rahul Mohan-M	2021/08/25		ecn no	ELX-I-41565-1						
	ISO 406		chr	-	-		rel level	Released						
ISO 1101		appr	Kuriakose, San	2021/08/25	product family			METRAL						
surface finish ISO 1302	<div style="display: flex; align-items: center;"> √ <div style="border: 1px solid black; padding: 2px;"> 3.200 </div> </div>	linear	0.X	±0.3	Amphenol FCI	title METRAL SIGNAL HEADER 4 MOD, 5 ROW PRESS-FIT	dwg no	85854			rev	<div style="border: 1px solid black; padding: 2px; display: inline-block;"> DJ </div>		
			0.XX	±0.13				cat. no.	-	Product - Customer Drw			sheet	13 of 20
			0.XXX	±0.050										
	angular	0°	±2°		amphenol-icc.com									

Creo F:14:ELX MC:ACC, REV F, 2020-12-21

METRAL P/N	ROW	CONTACT CODE MOD. 1					MOD. 2					MOD. 3					MOD. 4						
		1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22
85854-X85LF	E	1	1	1	-	1	-	1	-	1	-	1	-	1	-	1	-	1	-	1	-	1	-
	D	1	1	1	1	-	1	-	1	-	1	-	1	-	1	-	1	-	1	-	1	-	1
	C	1	1	1	-	1	-	1	-	1	-	1	-	1	-	1	-	1	-	1	-	1	-
	B	1	1	1	1	-	1	-	1	-	1	-	1	-	1	-	1	-	1	-	1	-	1
	A	1	1	1	-	1	-	1	-	1	-	1	-	1	-	1	-	1	-	1	-	1	-

METRAL P/N	ROW	CONTACT CODE MOD. 1					MOD. 2					MOD. 3					MOD. 4							
		1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23
85854-X86LF	E	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	
	D	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	
	C	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	4	4
	B	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2
	A	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2

METRAL P/N	ROW	CONTACT CODE MOD. 1					MOD. 2					MOD. 3					MOD. 4							
		1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23
85854-X87LF	E	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	
	D	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	4	4	4	4
	C	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	4	4	4	4
	B	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	4	4	4	4
	A	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	4	4	4	4

METRAL P/N	ROW	CONTACT CODE MOD. 1					MOD. 2					MOD. 3					MOD. 4						
		1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22
85854-X88LF	E	5	5	5	5	5	5	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6
	D	5	5	5	5	5	5	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6
	C	5	5	5	5	5	5	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6
	B	5	5	5	5	5	5	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6
	A	5	5	5	5	5	5	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6

PRODUCT NUMBER
SEE SHEET 1

NOTES:

1. FOR DIM A AND B SEE SHEET 2 AND UP.
2. MATERIAL : BODY : THERMOPLASTIC UL94-V0.
: CONTACT : COPPER ALLOY.
3. FOR PLATING PERFORMANCE REFER DRAWING # 10159408.
4. ALL PRODUCTS WITH PART NUMBERS SHOWN IN SUBSEQUENT TABLES WILL BE PACKAGED IN TUBES.
IF TRAY PACKAGING IS REQUIRED, A SUFFIX "P" WILL BE ADDED TO THE END OF THE PART NUMBER.
EXAMPLE: XXXXX-XXXPLF
5. PRODUCT SPECIFICATION GS-12-180
6. APPLICATION SPECIFICATION BUS-20-073
7. AFTER INSERTION INTO CIRCUIT BOARD WITH QUALIFIED TOOL.
8. THE PRODUCTS MEET THE EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS
AS DESCRIBED IN GS-47-0004.
9. ALL PRODUCTS WILL WITHSTAND EXPOSURE TO 260°C FOR 60 SECONDS IN A CONVECTION, INFRA-RED OR
VAPOR PHASE REFLOW OVEN.THE Au CONTACT SURFACE OF THE CONTACTS SHALL BE EXPOSED TO A MAXIMUM 140°C FOR
NO LONGER THAN 15 SECONDS IN A WAVE SOLDER APPLICATION.
10. A Δ SYMBOL WILL BE NEXT TO ANY DIMENSION, VIEW, OR NOTE WHICH HAS BEEN MODIFIED WITH THE CURRENT REVISION.

spec ref *		dr Terran Huang		2010/07/09	projection 	MM 	size A4	scale 1:10
tolerance std ISO 406 ISO 1101		eng Rahul Mohan-M		2021/08/25			ecn no ELX-I-41565-1	
TOLERANCES UNLESS OTHERWISE SPECIFIED		chr -		-			rel level Released	
surface 3.200 ISO 1302		linear	0.X	±0.3	Amphenol FCi	title METRAL SIGNAL HEADER 4 MOD, 5 ROW PRESS-FIT	dwg no 85854	rev DJ
			0.XX	±0.13				
		angular	0.XXX	±0.050	amphenol-icc.com	cat. no. -	Product - Customer Drw	
			0°	±2°			sheet 20 of 20	