


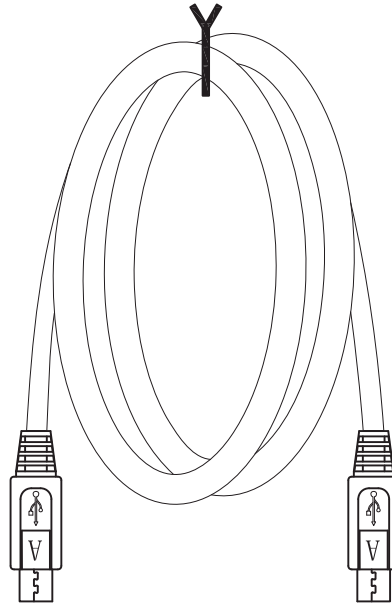


**P1**

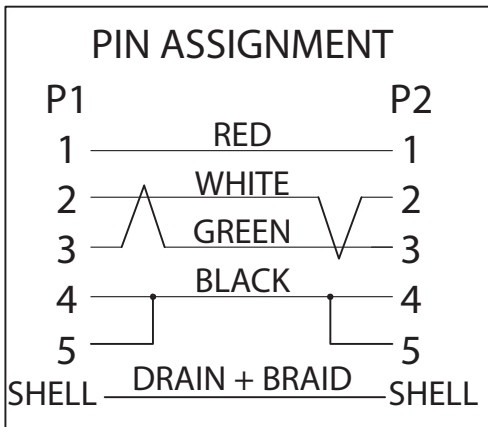

**P2**



**Material:**

- Cable: USB2.0 UL2725 [28AWG(7/0.12TC+AL):\*1P+ 28AWG(7/0.12TC)\*2C]+AEB(488 TC)
  - Jacket: Black
  - OD: 3.5MM
- Connectors: Micro USB 5P A/M Solder Type
  - Shell: Nickel
  - Pin: G/F
  - Insulator Color: Black
- Outer Jacket: Black PVC-50P

**Electrical:**

- 100% short, open, miswire test
- Conduct resistance: 2Ω Max.
- Insulation resistance: 5MΩ Min.
- Hi-Pot test: 300V DC



Scale	1:1						Name
TOLERANCE						Drawn	10.19.11
X.X	±0.40					Approved	Chappell
X.XX	±0.25						
X.XXX	±0.15						
Angle	±3°						
		Modification		Date		Name	



Item No.	<b>AK67301-5-R</b>	
Title	USB2.0 Micro Connection Cable, 5 Meters USB A Micro Male <=> USB A Micro Male	
Drawing No.		
Replace		rev00
Sheet		