

Customer Signature:

Customer Stamp:





Items	Content Revised	Date
1		
2		

E-green、L-black、N-white

UE-313A 15A 250V E206144

UE-314S 15A 250V E206144


E-green、L-black、N-white

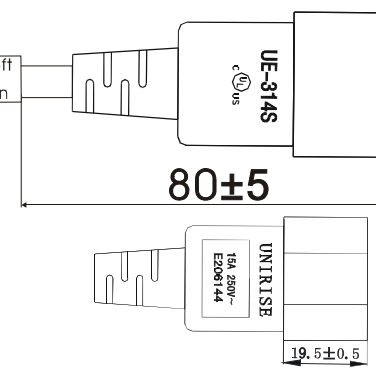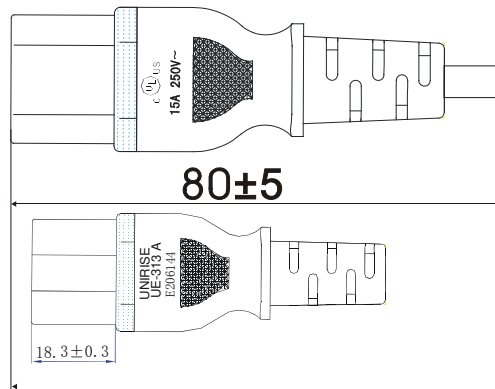

Technical requirements:

1. Plug: a. UE-313S, Current (A) :15, Voltage (V) :250 Approved: UL
b. UE-314S, Current (A) :15, Voltage (V) 250, Approved: UL
2. Cord: SJT #14/3C 105°C unirise press word Black Approved: UL
3. High Voltage Tested: 1500V/S No Attacked, No Flicker
4. No nick, Spot, Mottle Nn Appearance and Wording is Clearly
5. The All Material Compliance with RoHS and REACH

CONDUCTOR: 41X0.25±0.005



JACKET: $\Phi 9.15 \pm 0.2$

INSULATION: $\Phi 3.5 \pm 0.2$

CORD MARKING:

E176096 (UL) SJT VW-1 105°C 300V 3×2.08mm² (14AWG) Or
C(UL) SJT FT1 105°C 300V 3×2.08mm² (14AWG) UNIRISE

Items	Part Number	Description	Colour
1	315313900	Blade of UE-313A	/
2	316313001	Shell of UE-313A	Black
3	306560000	PVC of plug 60P UE-313A	Black
4	315314902	Blade of UE-314S	Black
5	306560000	PVC of plug 60P UE-314S	Black
6	CK91214322-2	SJT 3X14AWG 105°C	Black
7	39110028	PE bag 0.03X350X400mm	Transparent
8	39005028	47x13mm PET Special sticker (1FT 12in)	White

Drawing No.	Type	Power Supply Cord UE-313A+UE-314S			
Drawn by	Zheng Tianyong 2019-11-22	Unit	mm	Part NO.	PWCD-C14C15-15A-XXF-YYY
Checked by	songyu	Customer			
Approved by	Jason	Angle			