

NOTES:

MECHANICAL:

- COTACT: GOLD/NICKEL OVER COPPER ALLOY
- INSERT: YELLOW PVC
- COUPLING NUT: BLACK E-COAT OVER ZINC DIE CAST
- MOLDED BODY: YELLOW PVC
- CABLE: 18AWG 5 CONDUCTORS YELLOW TPE JACKET
- WRAP LABEL: YELLOW VINYL


ELECTRICAL:

- VOLTAGE RATING: 300V AC/DC
- AMPERAGE: 5.6A

ENVIRONMENTAL:

- OPERATION TEMP: 105°C

115030K02MXXX

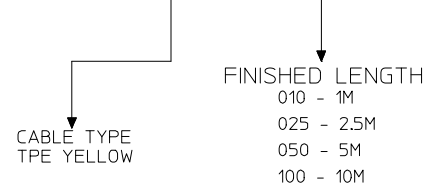

1	RED/WHITE	1
2	RED	2
3	GREEN	3
4	RED/YELLOW	4
5	RED/BLACK	5

RELEASED EC NO: IPG2016-1031 DRWNGGUSTAFSON 2016/01/22 CHKD:MZIEL INSKI 2016/02/19 APPR:BWOODMAN 2016/02/24	DESCRIPTION A	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 1:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION		
		4 PLACES ± --- ± --- 3 PLACES ± --- ± .005 2 PLACES ± 0.13 ± .010 1 PLACE ± 0.25 ± --- 0 PLACE ± --- ± ---	mm INCH mm INCH	DRAWN BY DATE GGUSTAFSON 2016/01/22 CHECKED BY DATE MZIEL INSKI 2016/02/19 APPROVED BY DATE BWOODMAN 2016/02/24	TITLE MINI CHANGE CABLE ASSY. 5P MA/FE 18AWG		molex		MATERIAL NO. 1300101974	DOCUMENT NO. SD-130010-035	SHEET NO. 1 OF 1
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			ANGULAR ± .5 °		SIZE C		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				