




# High Brightness LED Power Module

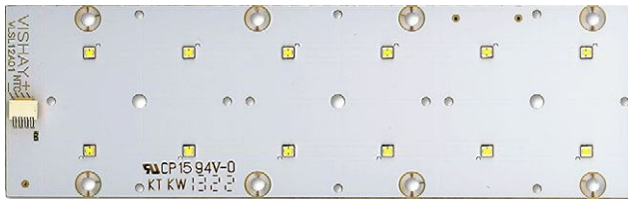

## DESCRIPTION

The VLSL12A03... power LED module series combines high lumen output and excellent heat dissipation on an easy to use aluminum metal core PCB. Due to the physical layout of the twelve, serially connected high brightness LEDs, ready-available matrix-lenses with a choice of various emission characteristics could be used just off the shelf. Every module is already equipped with a small thermal sensor and a fourfold plug in connector, so that no additional soldering process is required at customer site.

## PRODUCT GROUP AND PACKAGE DATA

- Product group: LED
- Package: LED module
- Product series: power
- Angle of half intensity:  $\pm 60^\circ$

## FEATURES

- High power LED module with aluminum metal core PCB
- Dimensions in mm: 161 x 50 x 2
- Single side / single layer PCB with shiny white surface
- PCB layout compatible with LEDIL quadruple lens series like Strada and High Bay
- PCB already equipped with 4-pin connector (87438-0443) and NTC (NTCS0603E3473JHT)
- 12 LEDs in series connection, max. current per LED 1.5 A
- CRI: min. 70, typ. 72
- Color temperature: 4700 K to 5500 K
- Power consumption only 36 W at  $T_{sp} = 85^\circ\text{C}$
- ESD withstand voltage: up to 2 kV according to JESD22-A114-B
- LM80 certified LEDs
- Material categorization: for definitions of compliance please see [www.vishay.com/doc?99912](http://www.vishay.com/doc?99912)



## APPLICATIONS

- Street lighting
- Indoor and outdoor lighting
- Tunnel lights
- Industrial lighting
- General lighting application

PARTS TABLE														
PART	COLOR	LUMINOUS FLUX (lm)			at $I_F$ (mA)	COLOR TEMPERATURE (K)			at $I_F$ (mA)	FORWARD VOLTAGE (V)			at $I_F$ (mA)	TECHNOLOGY
		MIN.	TYP.	MAX.		MIN.	TYP.	MAX.		MIN.	TYP.	MAX.		
VLSL12A03-3Q3T-50A	Cool white	3830	4000	-	1000	4700	5100	5500	1000	33.6	38	40.8	1000	InGaN

ABSOLUTE MAXIMUM RATINGS ( $T_{amb} = 25^\circ\text{C}$ , unless otherwise specified)				
VLSL12A03-3Q3T-50A				
PARAMETER	TEST CONDITION	SYMBOL	VALUE	UNIT
Forward current		$I_F$	1500	mA
Power dissipation	Total	$P_{tot}$	55	W
Junction temperature		$T_j$	135	$^\circ\text{C}$
Operating temperature range		$T_{amb}$	-40 to +110	$^\circ\text{C}$
Storage temperature range		$T_{stg}$	-40 to +110	$^\circ\text{C}$
Thermal resistance junction PCB backside		$R_{thJB}$	0.5	K/W



<b>OPTICAL AND ELECTRICAL CHARACTERISTICS</b> ( $T_{amb} = 25\text{ }^{\circ}\text{C}$ , unless otherwise specified) <b>VLSL12A03-3Q3T-50A, COOL WHITE</b>						
PARAMETER	TEST CONDITION	SYMBOL	MIN.	TYP.	MAX.	UNIT
Luminous flux total	$I_F = 700\text{ mA}$	$\Phi_V$	-	3000	-	lm
	$I_F = 1000\text{ mA}$		3830	4000	-	
Color temperature	$I_F = 700\text{ mA}$	CCT	-	5000	-	K
	$I_F = 1000\text{ mA}$		4700	5100	5400	
Color rendering index	$I_F = 700\text{ mA}$	CRI	-	72	-	
Forward voltage	$I_F = 700\text{ mA}$	$V_F$	-	36.6	-	V
	$I_F = 1000\text{ mA}$		33.6	38	40.8	
Power consumption	$I_F = 700\text{ mA}$	$P_{IN}$	-	26	-	W
	$I_F = 1000\text{ mA}$		33	38	41	
Luminous efficacy	$I_F = 700\text{ mA}$	$\eta_{opt}$	-	117	-	lm/W
	$I_F = 1000\text{ mA}$		-	105	-	
Full angle of half intensity	$I_F = 700\text{ mA}$	$2\phi_{\frac{1}{2}}$	-	120	-	$^{\circ}$
NTC resistance value	$T_{amb} = 25\text{ }^{\circ}\text{C}$	$R_{NTC}$	-	47	-	k $\Omega$

<b>LUMINOUS FLUX CLASSIFICATION</b>		
GROUP STANDARD	LUMINOUS FLUX (lm)	
	MIN.	MAX.
3Q	3830	4220
3R	4220	4640
3S	4640	5110
3T	5110	5620

**Note**

- Luminous flux is tested at a current pulse duration of 25 ms and an accuracy of  $\pm 11\%$ .  
The above classification represents the brightness range which includes only a few brightness groups. Only one group will be shipped on each bag (there will be no mixing of two groups on each bag).  
In order to ensure availability, single brightness groups will not be orderable.  
In a similar manner for colors where chromaticity groups are measured and binned, single chromaticity groups will be shipped on any one bag.  
In order to ensure availability, single chromaticity groups will not be orderable.

<b>COLOR TEMPERATURE CLASSIFICATION</b>		
GROUP STANDARD	CCT (K)	
	MIN.	MAX.
6	4700	5000
7	5000	5400

**Note**

- Color temperature is tested at a current pulse duration of 25 ms. In order to ensure availability, single CCT groups will not be orderable.

<b>FORWARD VOLTAGE CLASSIFICATION</b>		
GROUP STANDARD	FORWARD VOLTAGE (V)	
	MIN.	MAX.
E5	33.6	34.8
F5	34.8	36.0
G5	36.0	37.2
H5	37.2	38.4
J5	38.4	39.6
K5	39.6	40.8

**Note**

- Forward voltage is tested at a current pulse duration of 1 ms and an accuracy of  $\pm 0.1\text{ V}$ . In order to ensure availability, single forward voltage groups will not be orderable.



COLOR RANGE

VLSL12A03-3Q3T-50A, cool white

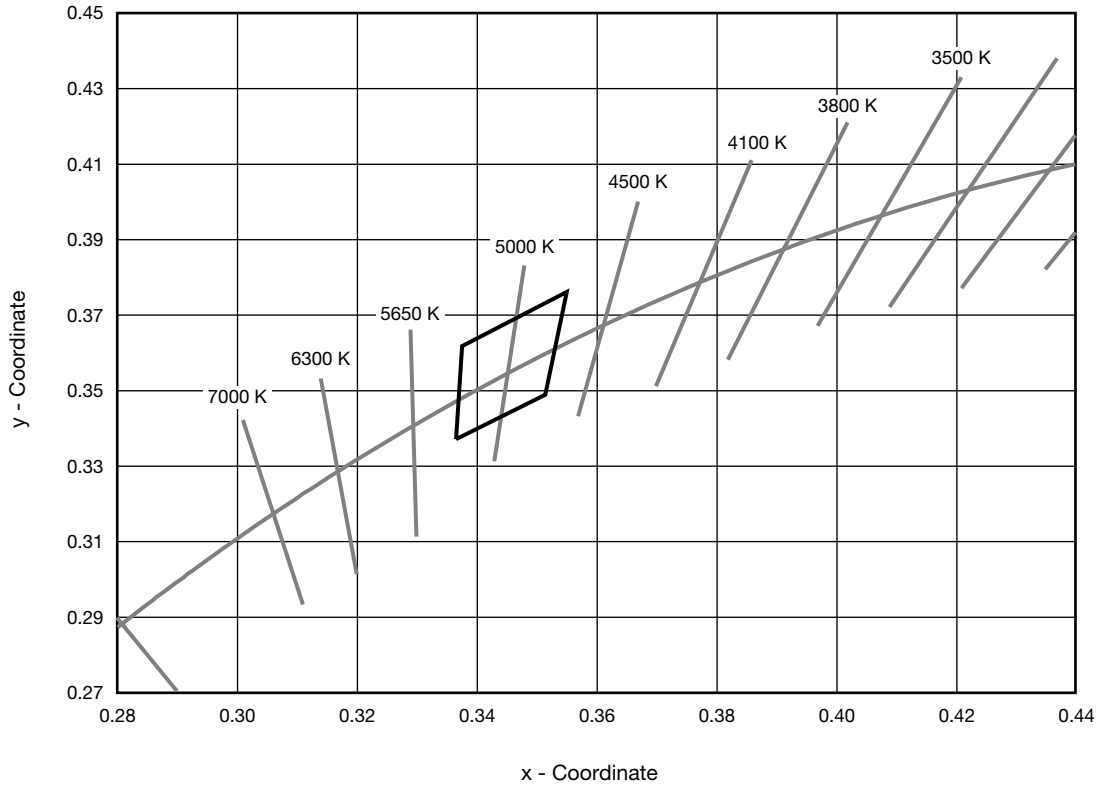


Fig. 1 - Chromaticity Coordinates of Colorgroups

TYPICAL CHARACTERISTICS (T<sub>amb</sub> = 25 °C, unless otherwise specified)

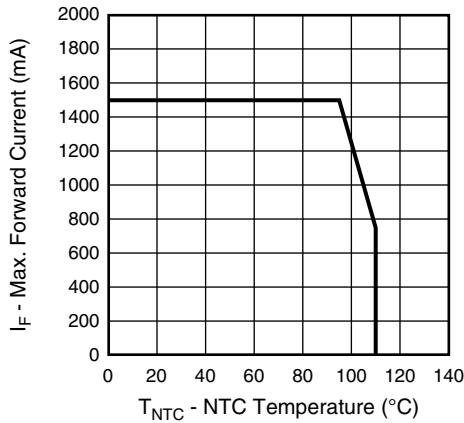


Fig. 2 - Maximum Forward Current vs. NTC Temperature

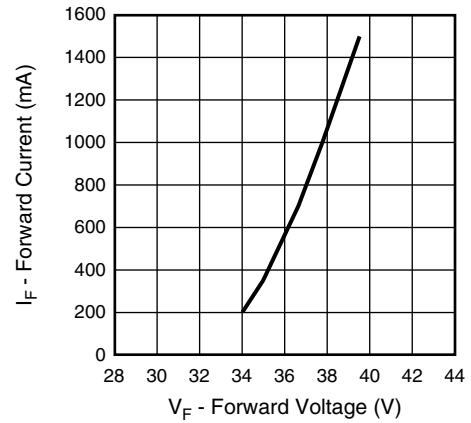


Fig. 3 - Forward Current vs. Forward Voltage

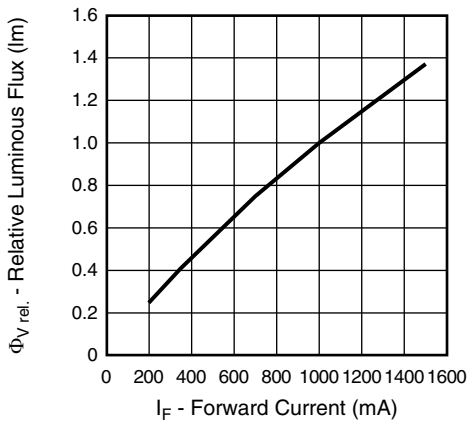


Fig. 4 - Relative Luminous Flux vs. Forward Current

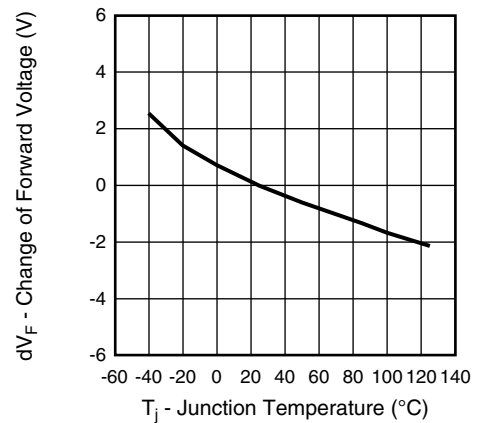


Fig. 7 - Change of Forward Voltage vs. Junction Temperature

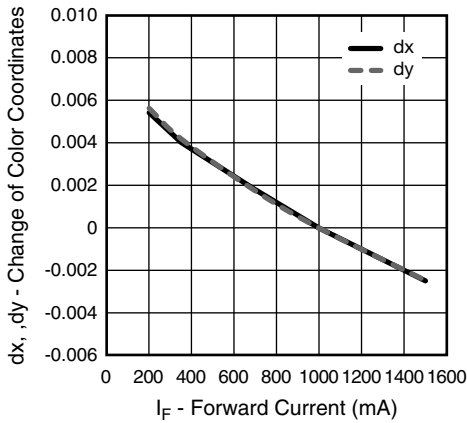


Fig. 5 - Change of Color Coordinates vs. Forward Current

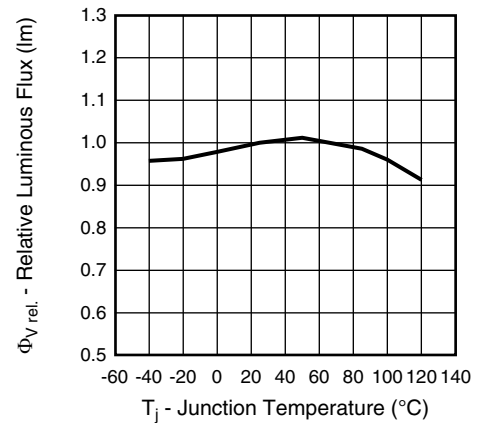


Fig. 8 - Relative Luminous Flux vs. Junction Temperature

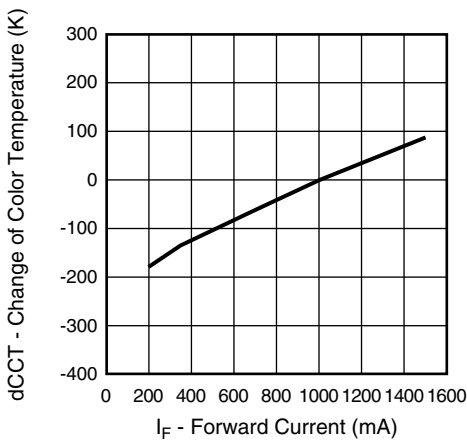


Fig. 6 - Change of Color Temperature vs. Forward Current

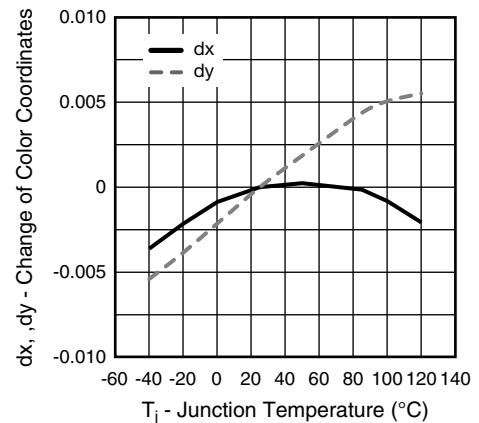


Fig. 9 - Change of Color Coordinates vs. Junction Temperature

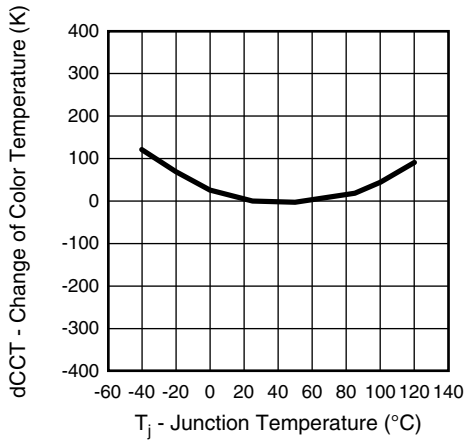


Fig. 10 - Change of Color Temperature vs. Junction Temperature

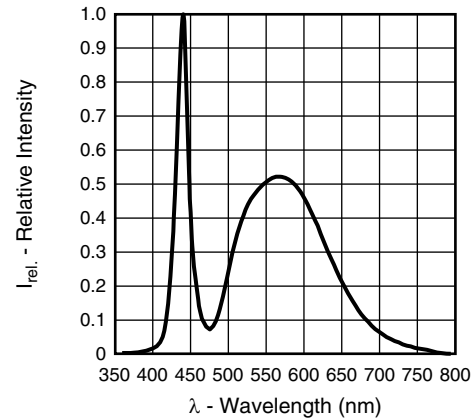


Fig. 11 - Relative Intensity vs. Wavelength

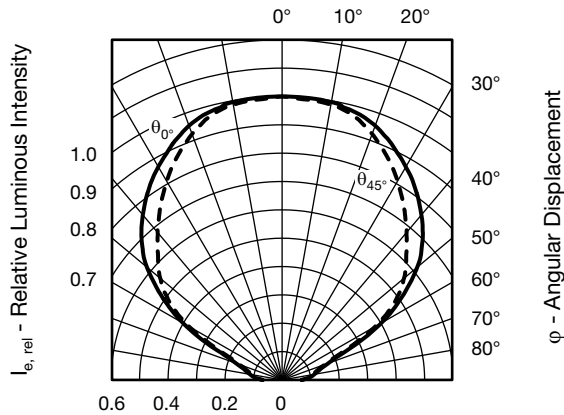
**LIGHT DISTRIBUTION OPTIONS**


Fig. 12 - Relative Luminous Intensity vs. Angular Displacement



Fig. 12 shows the light distribution characteristic of the VLSL12A03... without secondary optics. Using LEDIL 2 x 2 STRADA or High Bay quadruple lenses a variety of emission patterns can be realized. The VLSL12A03... is compatible with the following lenses:

STRADA SERIES	HIGH BAY SERIES
C12360_STRADA-2X2-DNW	C13749_HB-2X2-O
C12362_STRADA-2X2-DWC	C13233_HB-2X2-M
C12419_STRADA-2X2-A-T	C13239_HB-2X2-M-BLIND
C13299_STRADA-2X2-ME	C13605_HB-2X2-RW
C13300_STRADA-2X2-T2	C12361_HB-2X2-W
C13301_STRADA-2X2-T3	C13232_HB-2X2-WW
C13858_STRADA-2X2-XW	C13237_HB-2X2-WW-BLIND
C14116_STRADA-2X2-PX	
C13499_STRADA-2X2-CY	

Fig. 13 shows four exemplary emission patterns using different lenses.

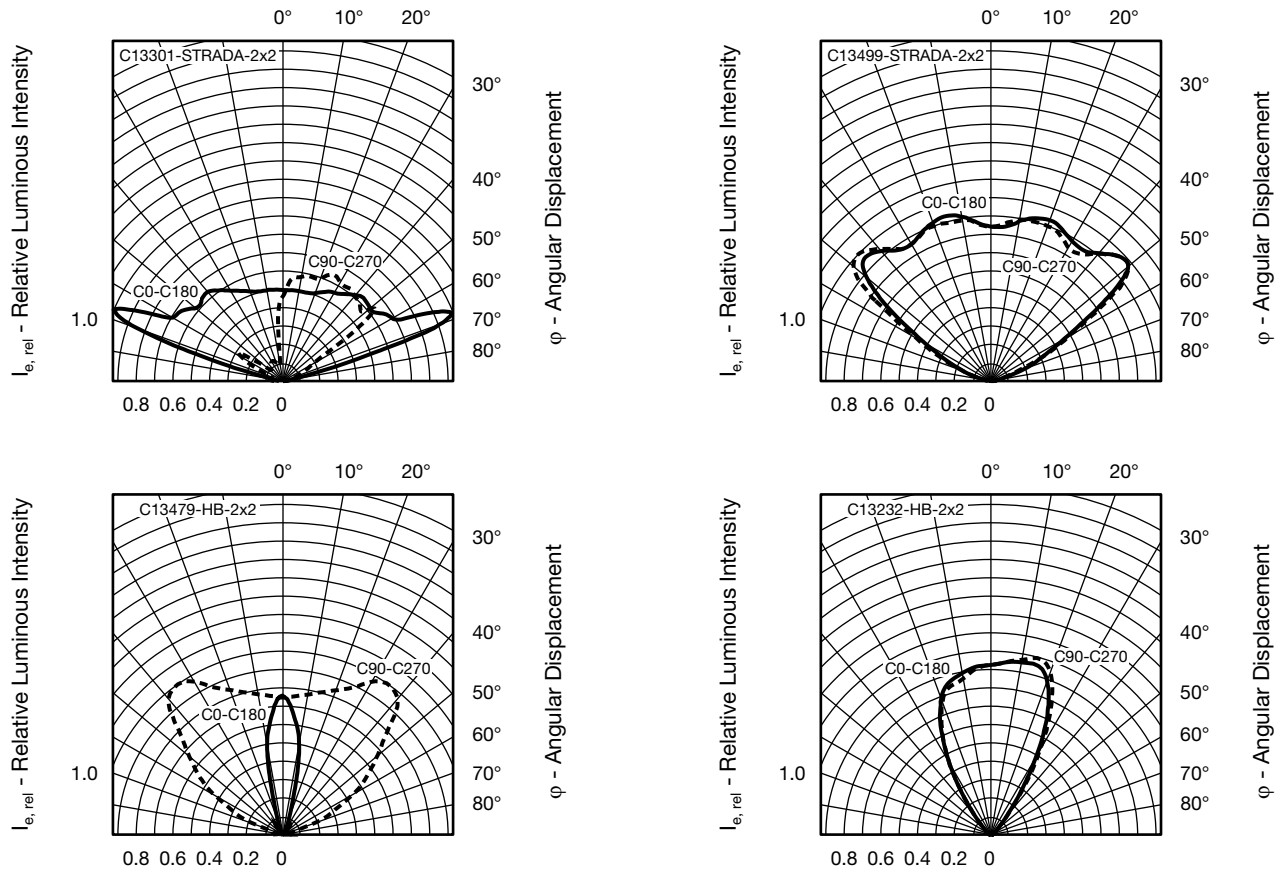


Fig. 13 - Four Examples for Different Light Distribution Options Using LEDIL 2 x 2 Lenses



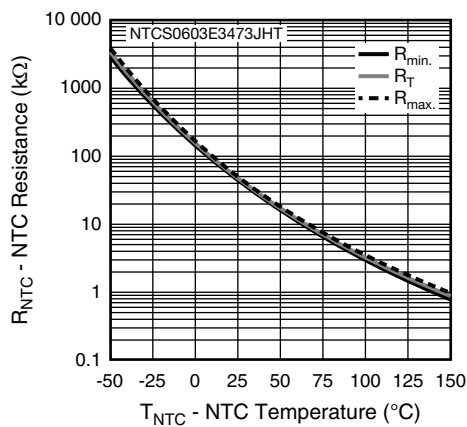


Fig. 14 - NTC Resistance vs. NTC Temperature

## PCB BASIC DESIGN DIMENSIONS in millimeters

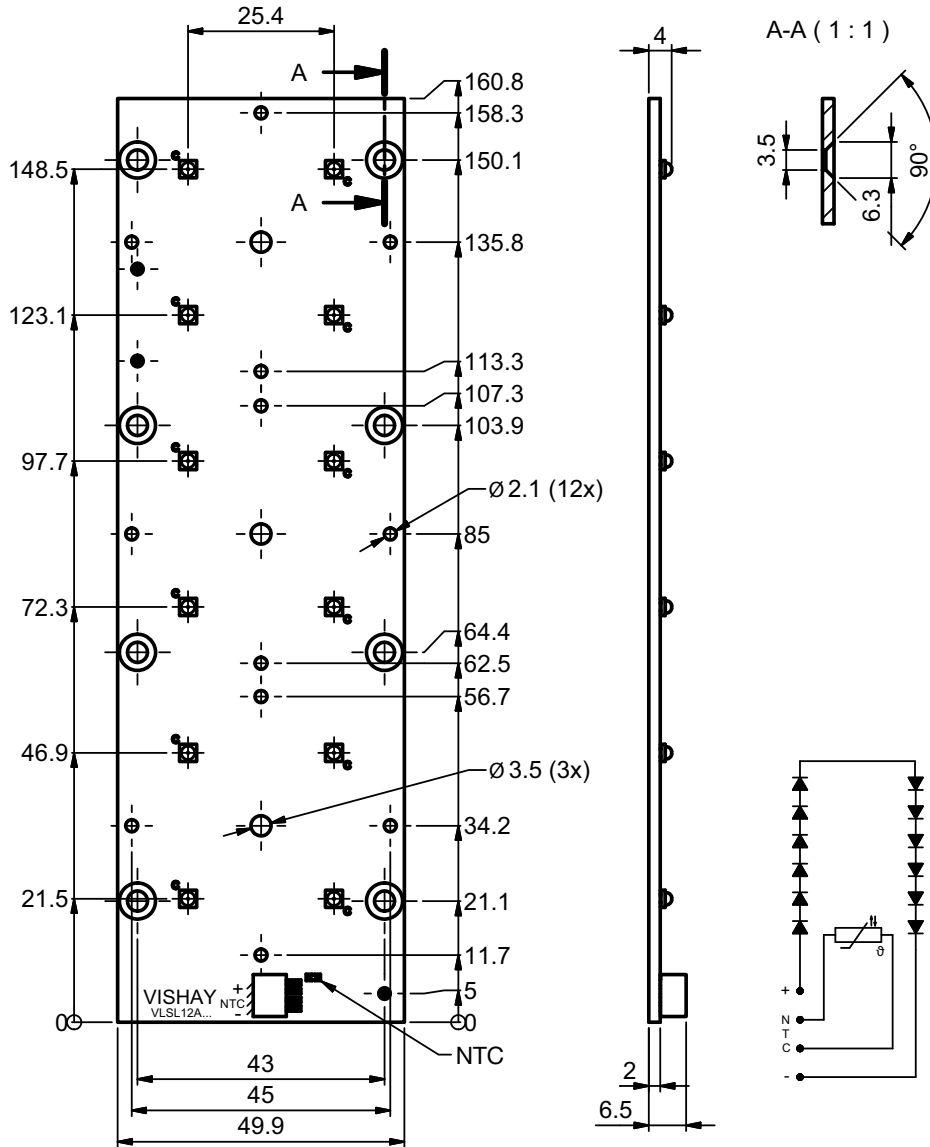

## BAR CODE PRODUCT LABEL (example only)

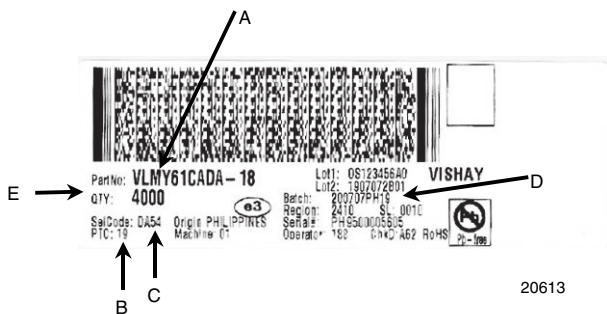

- A. Type of component
- B. Manufacturing plant
- C. SEL - selection code (bin):  
X = color group
- D. Batch:  
200707 = year 2007, week 07  
PH19 = plant code
- E. Total quantity



## **Disclaimer**

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.