

Field Programmable LVDS Blank Oscillator

- Programmed with PG2000P/PG3000 within seconds
- Programmable 2 times
- Provides a sealed finished custom oscillator
- 9.6 x 11.4 SMD

Applications

Series

CPPV9



Part Numbering Example: CPPV9 LZ A5 B6 100.0

CPPV9	L	Z	A5	B6	100.000
SERIES	VOLTAGE	ADDED FEATURES	OPERATING TEMP	STABILITY	FREQUENCY
	Blank = 5 V L = 3.3 V	Blank = Bulk T = Tube Z = Tape/Reel	Blank = 0 – +70 °C A5 = -20 – +70 °C A7 = -40 – +85 °C	B6 = ±100 ppm BP = ±50 ppm	1.000 – 133.0 MHz

Specifications:	Min	Typ	Max	Unit
Frequency Range:	1.0		133.0	MHz
Available Stability Options:	-100 -50		100 50	ppm ppm
Prog. Supply Voltage:	4.75 3.135	5.0 3.3	5.25 3.465	V V
Operating Temperature Range Options:	-20 -40		70 85	°C °C
Storage Temperature:	-55		125	°C
Aging (PPM/1st Year): Ta=25°C, Vdd=3.3V			±5	
Diff. Clock Rise Time	0.2	0.7	1.0	ns
Diff. Clock Fall Time	0.2	0.7	1.0	ns
Output Level:	LVDS			

Notes: Recommended 0.01 –F bypass capacitor from Vdd to Gnd. Capacitor should be as close to oscillator as possible.

Cardinal Components, Inc.

155 Route 46 West

Wayne, NJ 07470

Rev: C-090414-11




TEL: (973)785-1333

E-MAIL: sales@cardinalxtal.com

WEB: http://www.cardinalxtal.com

CPPV9

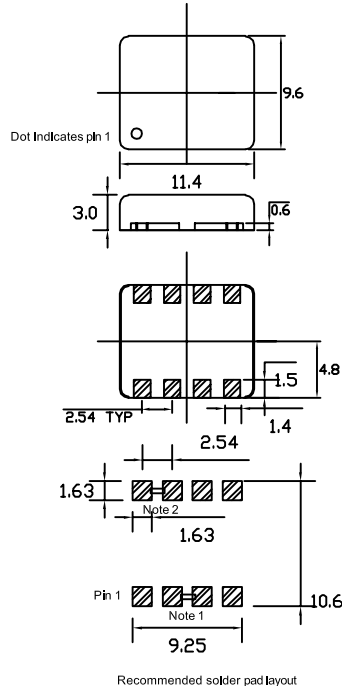


PIN FUNCTION

PIN 1 OE
 PIN 2 CONNECT TO PIN 3
 PIN 3 CONNECT TO PIN 2
 PIN 4 GND
 PIN 5 LVDS-
 PIN 6 LVDS+
 PIN 7 VDD
 PIN 8 VDD

Note 1: Connect pin 2 to pin 3
 Note 2: Connect pin 7 to pin 8

LEVELS TEST CIRCUIT

LVDS Levels Test Circuit

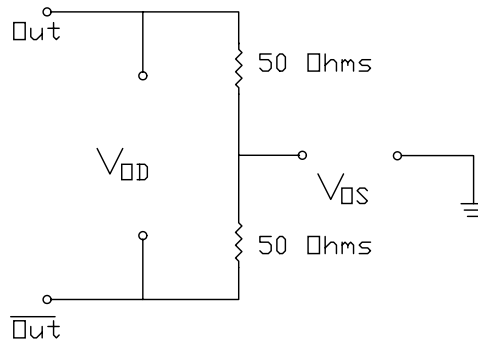

SWITCHING TEST CIRCUIT

LVDS Switching Test Circuit

