THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION JUNE ,2006.
© COPYRIGHT 2006 By – ALL RIGHTS RESERVED.

LOC	DIST
E	B

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	C	ECR-14-016163	30OCT2014	RZ	MY

NOTES:

1. SINGLE PACKING: ONE CONNECTOR PER LABELED BAG PACKAGED. LABELED PER TEC-107-115
2. TRAY PACKAGED
3. Ag PLATING
4. ELECTRICAL CHARACTERISTICS

FREQUENCY RANGE:	DC – 2 GHz
NOMINAL IMPEDANCE:	75 Ohm
INSULATION RESISTANCE:	5000 MOhm
WORKING VOLTAGE:	500 Volts RMS at Sea Level
DIELECTRIC WITHSTAND VOLTAGE:	1500 Volts RMS Max
CONTACT RESISTANCE:	
CENTER CONTACT:	1.50 mOhm Max
OUTER CONTACT:	1.00 mOhm Max
VSWR @ xGHz:	N/A
INSERTION LOSS xdb:	N/A

5. MECHANICAL CHARATERISTICS

MOUNT NUT RECOMMENDED TORQUE:	4 Nm
DURABILITY:	500 Cycles Min

6. ENVIRONMENTAL CHARACTERISTICS

OPERATING TEMPERATURE:	–40 to +85 DegC

7. FOR TECHNICAL DATA REFER TO YOUR LOCAL TE CONNECTIVITY SALES OFFICE
8. ALL DIMENSIONS ARE NOMINAL FOR REFERENCE ONLY UNLESS OTHERWISE STATED

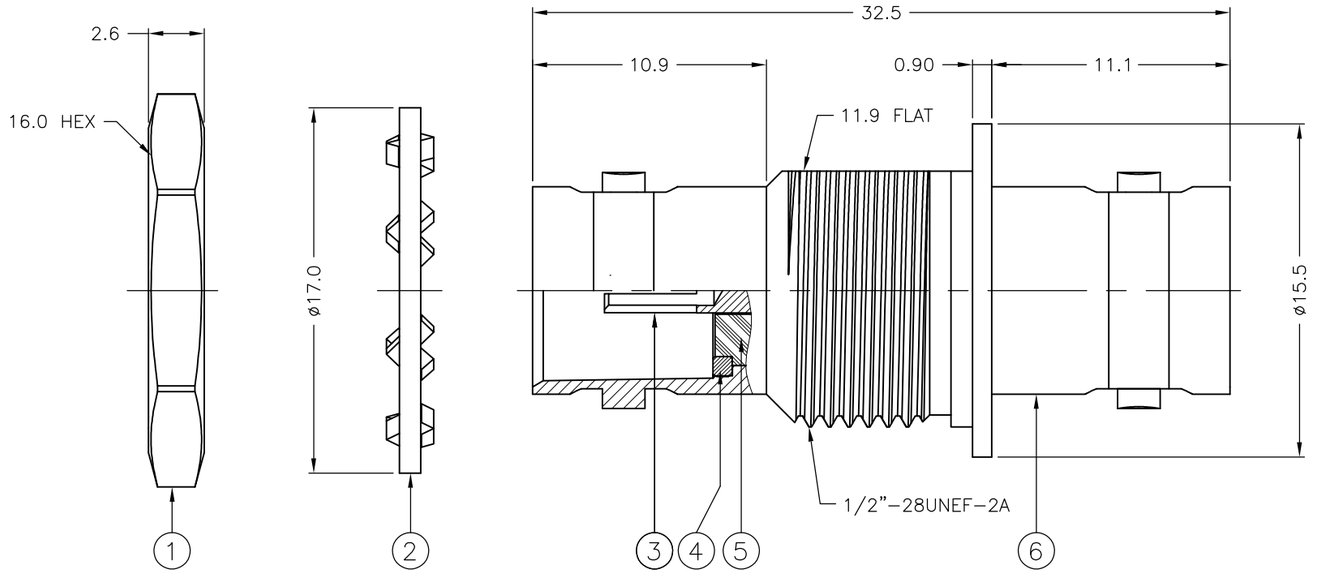

RECOMMENDED PANEL LAYOUT

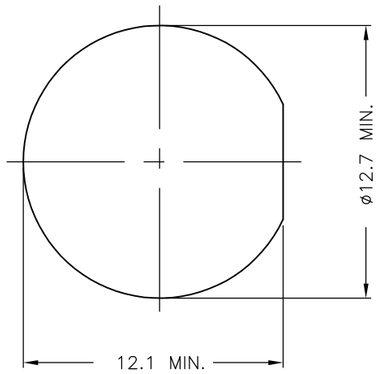

		QUANTITY PER ASSY		MATERIAL	DESCRIPTION	ITEM
		2	1	PARTS LIST		
		6--0	1--0			
		1	1	BRASS 3	BODY	6
		2	2	PTFE	INSULATOR	5
		1	1	BRASS 3	WASHER	4
		1	1	PHOSPHOR BRONZE 3	CONTACT	3
		1	1	PHOSPHOR BRONZE 3	LOCKWASHER	2
		1	1	BRASS 3	MOUNT NUT	1

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC	± –
1 PLC	± 0.2
2 PLC	± 0.1
3 PLC	± –
4 PLC	± –
ANGLES	± –

MATERIAL: SEE TABLE

FINISH: –

DWN	J.SANDWELL 13JUN06
CHK	S.PARLOW 13JUN06
APVD	F.WHEELER-KING 13JUN06
PRODUCT SPEC	–
APPLICATION SPEC	–
WEIGHT	–

CUSTOMER DRAWING

TE Connectivity

NAME: BNC BULKHEAD ADAPTOR J-J 75 OHM – –

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C-1478045	–

SCALE	SHEET	REV
NTS	1 OF 1	C