

GW5BRF15L0B


White LED (High Color Rendering)

- High power consumption 6.7W & high CRI LED emitters for solid-state lighting application.
- Blue LED die + Red and Green phosphor technique to achieve high CRI.
- Based on "ceramic substrate" to achieve high level reliability and heat release.

Feature

- (1) Outside dimension 18 x 18 x 1.5mm_t ±₁ (Emitting part excluded)
- (2) 48 LED dice mounted.
- (3) CRI Ra=94(Avg.), Color temperature 4,000K
- (4) Not required wiring on board. Possible to attach easily and directly to heat sink.
- (5) CCT and Ra characteristics are based on EnergyStar program.

External dimensions and equivalent circuit (unit : mm)

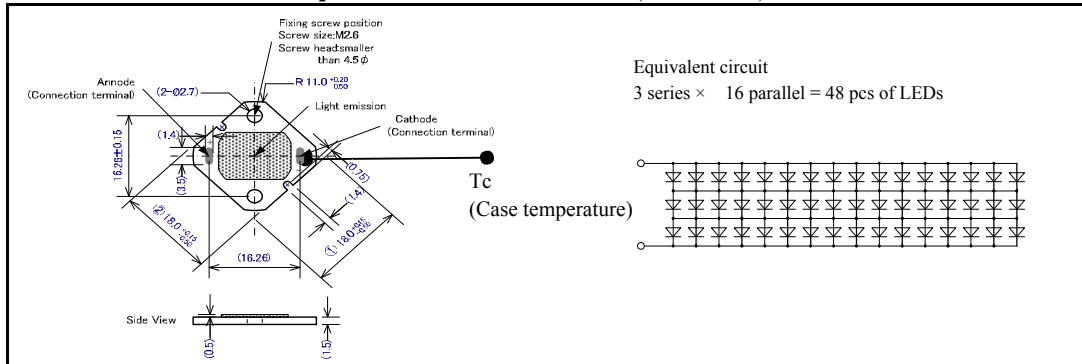

Absolute maximum ratings (Reference value)

Item	Symbol	Rating	Unit
Power Dissipation	P	8.0	W
Forward Current	I _F	700	mA
Reverse Voltage	V _R	15	V
Operating Temperature	T _{opr}	- 30 ~ + 90	°C
Storage Temperature	T _{stg}	- 40 ~ + 100	°C


Electro-optical characteristics (Reference value) (T_c=25°C)

Item	Symbol	Condition	MIN.	TYP.	MAX.	Unit
Forward Voltage	V _F	I _F = 640 mA	8.5	(10.5)	11.5	V
Luminous Flux	Φ	I _F = 640 mA	250	(340)	-	lm
Chromaticity Coordinates	x	I _F = 640 mA	-	0.382	-	-
	y		-	0.380	-	-
Color Temperature	-	I _F = 640 mA	(3710)	3985	(4260)	K
CRI	Ra	I _F = 640 mA	-	(94)	-	-

Chromaticity coordinate

Rank	Chromaticity table				
	Point 1	Point 2	Point 3	Point 4	
-	x	0.4006	0.3736	0.3670	0.3898
-	y	0.4044	0.3874	0.3578	0.3716

(I_F=640mA T_c=25°C)

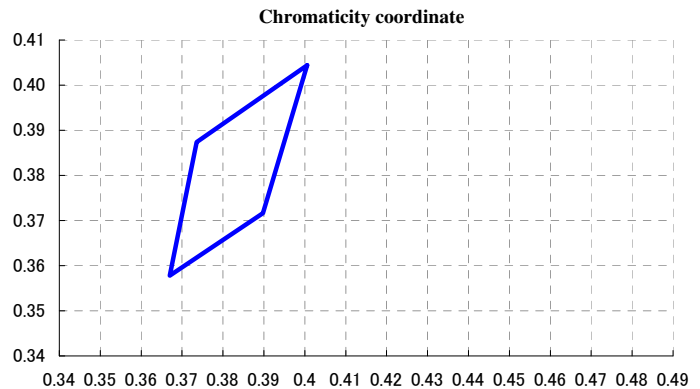

The information of this leaflet is tentative definition. Please confirm it with specifications when you adopt it.