


	Ŧ	۵	нт —	_ m	D	0
--	---	---	------	-----	---	---

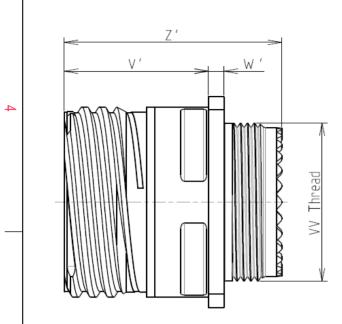

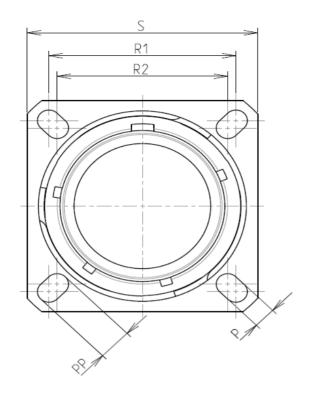



LAYOUT SHOWN AS

Keying Shown as example

## CHARACTERISTICS

ယ

 $\sim$ 

-Mass

BASIC SERIES:

SHELL SIZE : 13

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

PLATING : J = Olive drab Cadmium

-Standard : Based on MIL-DTL-38999 Series III

	-Shell Material	: Composite			
	-Shell Plating	: Olive drab Cadmium			
	-Insulator	: Thermoplastic			
	-Contacts	: Copper Alloy			
-Seals & Grommet : Silicon Elastomer		: Silicon Elastomer			
	-Contact Plating	: Gold over copper Alloy $0.8 \mu m$ minimum			
	-Durability	: 500 Mating cycles			
	-Delivered without Souriau contacts				
	-Temperature Range	-65℃ to +175℃			
	-Salt Spray	: 2000 hours			

: 15.4 g ± 10%

8D 0

G

13

J

26

S

F

A L

Connector dimension			
Dim	Nominal		
Р	3.25±0.2		
PP	4.93±0.2		
R1	23.01		
R2	20.62		
S	28.6±0.3		
V'	19.5+1.4/-0		
W'	2.1/3.65		
Ζ'	32 Max		
VV THREAD	M18x1-6g		

Delivered W/O Contacts


CONTACT LAYOUT : 13-26

CONTACT TYPE : SOCKET(500 Matings)

Е

**ORIENTATION : A** 

SOURIAU shall not be liable for a due to a use of the Products the Specifications issued by either (professional recommend

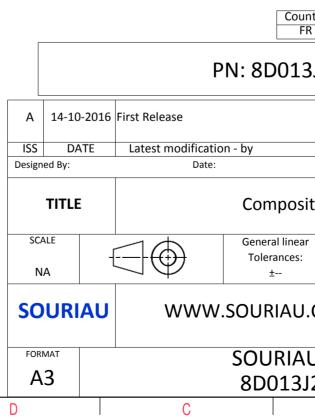

Φ		A		
				4
				3
S EXAMPLE				0
any non-conformi which does not co of the Parties or I ndation, technical n	mply with by a third party	/		
untry Jurisc FR	y Jurisdiction & Control List Not Listed			
3J26SAL				
			MOD N°	
	CUSTOMER	DRAWING		
site Receptac	Receptacle 8D series			
ar :	NPRDS / PROJECT 859			1
.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission				
U DRG N° SHEET				
J26SAL-C		A	1/2	J
-	·			

-	т	۵	<u>п</u>	m	D	0
		Contact Layout				Panel Cutou
4		26			Å	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING
_		2#12 6#22D	1		* 	
ω	Ctc A B C D E F 1 2	X Y   0 3.47   2.47 4.34   2.47 -4.34   0 -3.47   -2.47 -4.34   -2.47 -4.34   3.25 0   -3.25 0				Dim ØA ØA R1 ØT
						SOURIAU shall not be liable for any due to a use of the Products wh the Specifications issued by either of (professional recommendati
N						PN: 8D013J
					A 14-10-20 ISS DATE Designed By:	16 First Release
					SCALE	General linear Tolerances:
-					SOURIA	U WWW.SOURIAU.C
	Н	G	F	E	FORMAT A3	SOURIAU 8D013J2
	11		1 I			

