




THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
H	-	P	LTR	DESCRIPTION	DATE	DWN	APVD
		F		ECR-12-014360	21SEP2012	SS	RRP

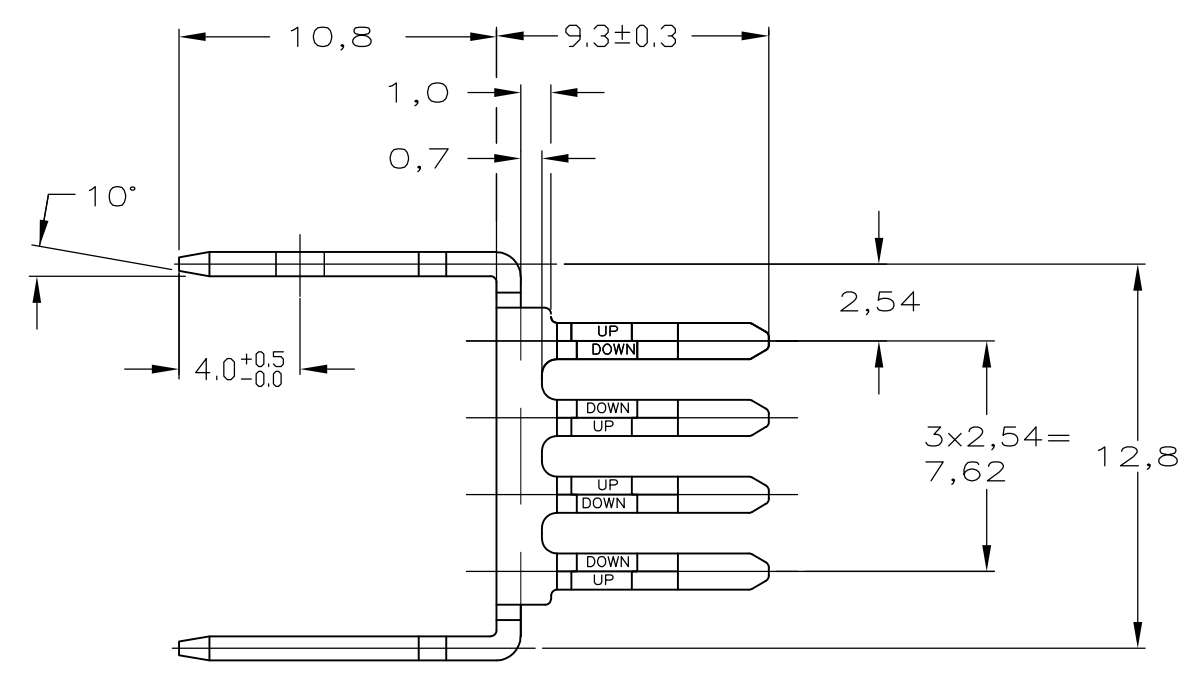

NOTES:

- ① PHOSPHORBRONZE.
- ② PLATING : AREA  $\Delta$  Sn PLATE TO ASTM B 545. NI UNDERCOAT TO ASTM B 571 ALL OVER
- ③ PLATING : Sn PLATE TO ASTM B 545 AND NI UNDERCOAT TO ASTM B 571 ALL OVER
- ④ QUANTITY PER PACKAGE 1500 PCS.

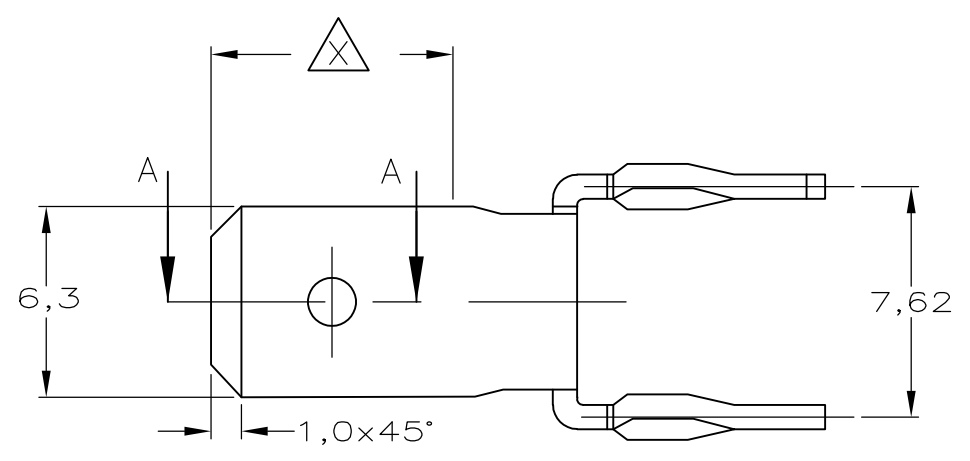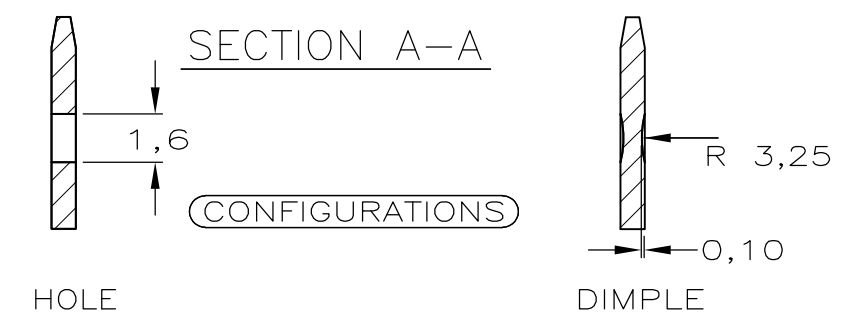

DIMPLE	④②	①	1-167892-2
HOLE	②	①	167892-7
HOLE	③	①	167892-6
-			-
DIMPLE	③	①	167892-3
DIMPLE	②	①	167892-2
CONFIGURATION	FINISH	MATERIAL	PARTNUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S.Meeuwsen 15JAN93	<b>STE</b> TE Connectivity			
		CHK R.v.Lokven 22JAN93				
		APVD L.v.Soest 26JAN93	NAME			
		PRODUCT SPEC 108-19059	8 POS. POWER LINKING TERMINAL WITH ACTION PIN			
		APPLICATION SPEC -	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
		WEIGHT -	A3	00779	C-167892	-
CUSTOMER DRAWING		SCALE 4:1	SHEET 1 OF 1	REV F		

DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:
	0 PLC ± -
	1 PLC ± 0,2
	2 PLC ± 0,1
	3 PLC ± -
	4 PLC ± -
	ANGLES ± 5°
MATERIAL -	FINISH -