



General Electronic Devices

Makers of active and passive components
 Quartz Crystal * Oscillators * Synthesizer * Filters
 Micro-Hybrid Assembly Services


SMD100B-ED-32.768KHz

1. ELECTRICAL CHARACTERISTICS


Parameter	Value
Holder Style	7.0x5.0mm SMD oscillator
Frequency	32.768KHz
Frequency stability (Stability vs temp,vs supply variations,vs load variations,calibration & aging)	± 50 ppm
Supply Voltage	$5.0 \pm 10\%$ VDC
Output waveform	CMOS
Operating Temp. Range	-10~70°C
Storage Temp.Range	-55~+125°C
Symmetry	45%/55%(min/max)
Output load	15pF
Standby Current Consumption	10uA (max)
Start up time	5ms (max)
Rise/Fall time	45ns(max)
Aging	± 5 ppm(@25°C 1 st year)

2. DIMENSION:(unit:mm)


[TOP VIEW]



[BOTTOM VIEW]

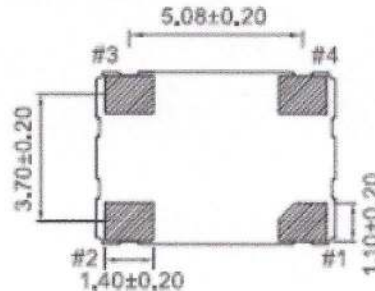

[SIDE VIEW]



Pin#	Function
1	Enable Control
2	GND
3	Output
4	VDD



General Electronic Devices

Makers of active and passive components
Quartz Crystal * Oscillators * Synthesizer* Filters
Micro-Hybrid Assembly Services

