

MATERIALS AND FINISHES:

BNC PLUG
COUPLING NUT : ZINC ALLOY
PLATED NICKEL

BODY : BRASS
PLATED NICKEL

INSULATOR : POLYPROPYLENE

OUTER CONTACT : BRASS
PLATED NICKEL

CENTER CONTACT : BRASS
PLATED GOLD

SPRING WASHER : BERYLLIUM COPPER
PLATED NICKEL

RETAINING RING : BRASS
PLATED NICKEL

WASHER : BRASS
PLATED NICKEL

GASKET : SILICONE RUBBER

SMA PLUG
BODY, COUPLING NUT: BRASS
PLATED NICKEL

CENTER CONTACT: BERYLLIUM COPPER
PLATED GOLD

INSULATOR: TEFLON

GASKET: SILICONE RUBBER

C'RING: BERYLLIUM COPPER

CRIMP TUBE: BRASS
PLATED NICKEL

CABLE: RG58 OR EQUIVALENT

SHRINK TUBE: VERSAFIT OR EQUIVALENT

PACKAGING: BY POLY BAG

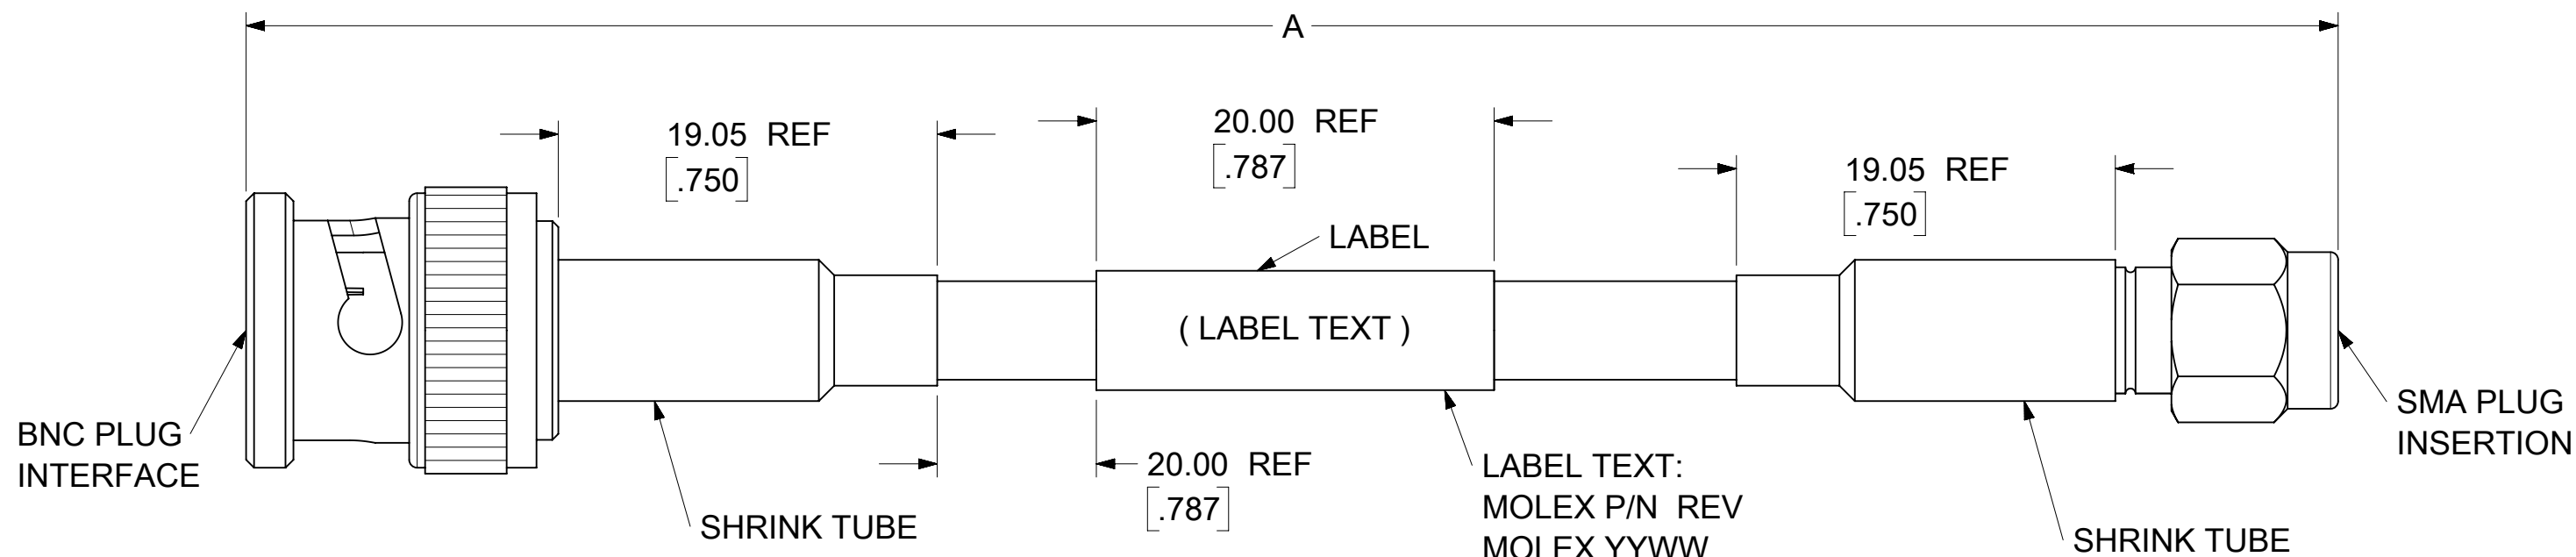


TABLE 1:

SPECIFICATION	DESCRIPTION
MIL-STD-348A, FIG. 301.1	SMA PLUG INTERFACE
MIL-STD-348A, FIG. 301.1	BNC PLUG INTERFACE

TABLE 2:

73230-5294	48.000±.591	1219.20±15.00
73230-5293	39.370±.591	1000.00±15.00
73230-5292	36.000±.472	914.40±12.00
73230-5291	24.000±.315	609.60±8.00
73230-5290	12.000±.197	304.80±5.00
PART NO.	IN	MM
	DIM A	

FUNCTIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION									
FA = 0	DIMENSION UNITS	SCALE	CURRENT REV DESC:							
FC = 0	MM/INCH	3:1	EC NO: 675763 DRWN: WANGR2 2021/06/17 CHK'D: MYLU07 2021/08/30 APPR: LCHEN03 2021/08/30 INITIAL REVISION: DRWN: WANGR2 2021/06/17 APPR: LCHEN03 2021/08/30							
FE = 0	GENERAL TOLERANCES (UNLESS SPECIFIED)									
NEW RELEASE	ANGULAR TOL	± 2.0°	CA BNC PLUG STR TO SMA PLUG STR WITH RG58 CABLE EWR#14549-A PRODUCT CUSTOMER DRAWING							
#####	4 PLACES	±	DOCUMENT NUMBER							
	3 PLACES	±	732305290							
	2 PLACES	±	DOC TYPE DOC PART REVISION							
	1 PLACE	±	PSD 000 A							
	0 PLACES	±	MATERIAL NUMBER CUSTOMER SHEET NUMBER							
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION		DRAWING	SERIES	SEE TABLE 2		GENERAL MARKET 1 OF 1	
					C-SIZE	73230				