



SECTION Z-Z

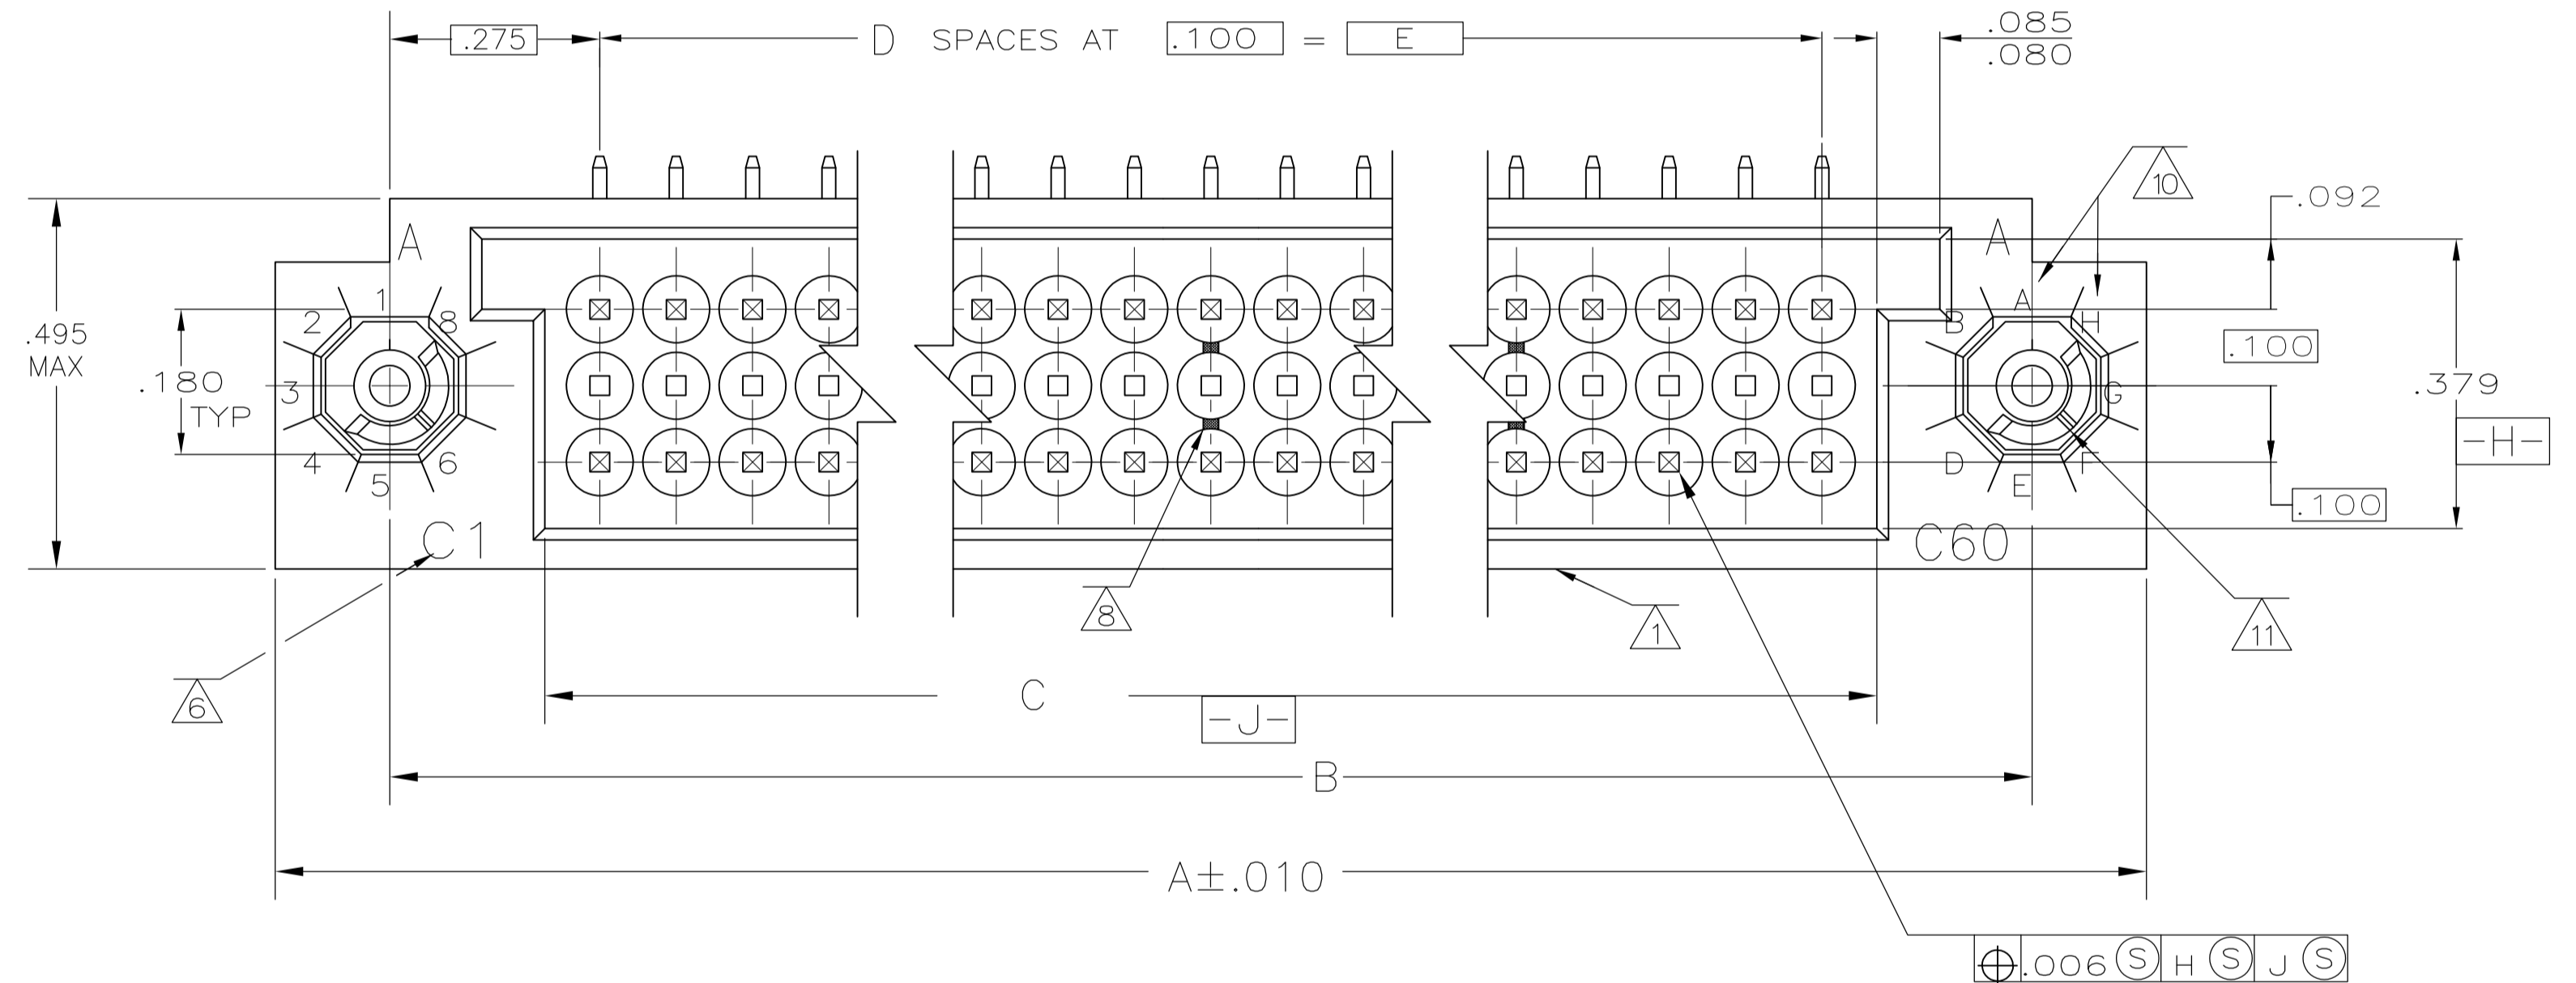

- 1 CUSTOMER P/N, AMP, DATE CODE, AMP P/N, MARKED THIS SIDE.
- 2 HOUSING MATERIAL: POLYPHENYLENE SULFIDE, GST-40F, PER MIL-M-24519.
- 3 CONTACT MATERIAL: BRASS
- 4 FINISH: .000030 GOLD OVER .000050 NICKEL IN CONTACT AREA.
- 5 FINISH:.000100 TIN LEAD OVER .000050 NICKEL.
- 6 LETTERS INDICATING OUTSIDE ROWS AND NUMBERS INDICATING END CAVITIES MARKED THIS SURFACE.
- 7 NUMBERS INDICATING EVERY FIVE CAVITIES MARKED ON BOTH SIDES.
- 8 LINES INDICATING EVERY FIVE CAVITIES MARKED ON MATING FACE.
- 9 KEY MUST BE CAPTIVATED BY RIVET. ROLLED EDGES OF RIVET MUST BE TIGHT TO KEY FOR AT LEAST 270° OF CONTACT SURFACES.
- 10 KEY POSITION IDENTIFICATION MOLDED ON SURFACE SHOWN.
- 11 CENTER SCORE MARK ON KEY TO POINT TOWARD NUMBER AND LETTER SPECIFIED BY KEYING CODE CHART PER ASSY DASH NUMBER.
- 12 FINISH:.000100 TIN OVER .000050 NICKEL.

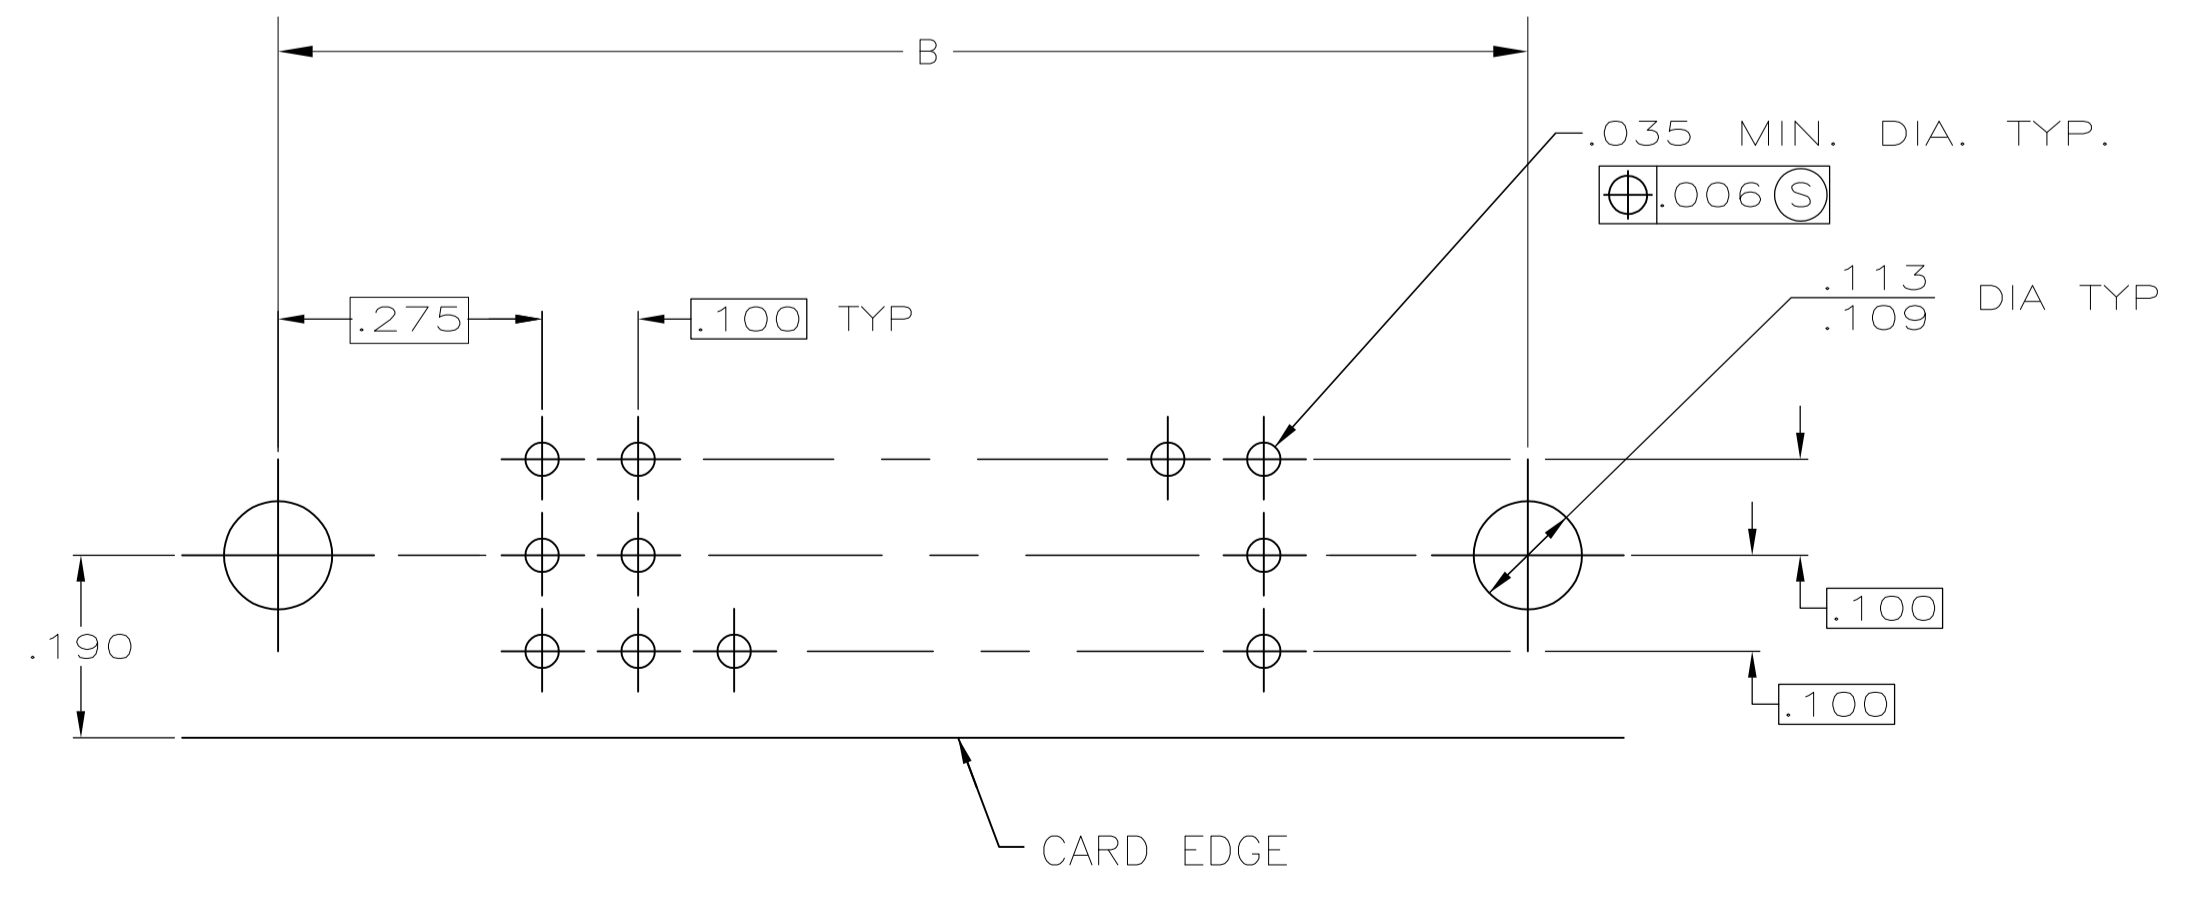

PC BOARD LAYOUT

2	FULLY LOADED	E-1	-	5.900	59	6.044	6.450	6.750	180	5-532012-2	
5	FULLY LOADED	H-8	768485-76	5.900	59	6.044	6.450	6.750	180	1-532012-2	
5	OBSOLETE	60 IN ROW A & 60 IN C	H-8	768485-88	5.900	59	6.044	6.450	6.750	180	1-532012-1
5	OBSOLETE	60 IN ROW A & 60 IN C	F-6	768485-87	5.900	59	6.044	6.450	6.750	180	1-532012-0
5	OBSOLETE	60 IN ROW A & 60 IN C	D-3	768485-77	5.900	59	6.044	6.450	6.750	180	532012-9
5	OBSOLETE	60 IN ROW A & 60 IN C	G-7	768485-78	5.900	59	6.044	6.450	6.750	180	532012-8
5	OBSOLETE	60 IN ROW A & 60 IN C	A-5	768485-86	5.900	59	6.044	6.450	6.750	180	532012-7
5	OBSOLETE	FULLY LOADED	A-5	768485-73	5.900	59	6.044	6.450	6.750	180	532012-6
5	OBSOLETE	60 IN ROW A & 60 IN C	D-2	768485-81	5.900	59	6.044	6.450	6.750	180	532012-5
5	OBSOLETE	60 IN ROW A & 60 IN C	C-3	768485-80	5.900	59	6.044	6.450	6.750	180	532012-4
5	60 IN ROW A & 60 IN C	B-4	768485-79	5.900	59	6.044	6.450	6.750	180	532012-3	
5	FULLY LOADED	E-1	768485-75	5.900	59	6.044	6.450	6.750	180	532012-2	
5	FULLY LOADED	F-6	768485-74	5.900	59	6.044	6.450	6.750	180	532012-1	
5	CONTACTS LOADED	KEY CODE	CUST. P/N	E	D	C	B	A	NO. OF POSN.	PART NO	

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES	TOLERANCES UNLESS OTHERWISE SPECIFIED:	DIN W.D. KISELA 4-23-93	STE	TE Connectivity
0 PLC ± -	1 PLC ± -	CHK D. MILLER 5-10-93	NAME: PIN HEADER ASSY, RIGHT ANGLE 3 ROW, .100, WITH MOUNTING EARS	
2 PLC ± -	3 PLC ± .005	APVD D. MILLER 5-10-93		
4 PLC ± -	ANGLES ± -	MATERIAL	APPLICATION SPEC	RESTRICTED TO
FINISH	WEIGHT	SIZE A1	CAGE CODE 00779	DRAWING NO. 532012
2 3	4 5 12	CUSTOMER DRAWING	SCALE 5:1	SHEET 1 OF 1