

т	۵	п	m	O



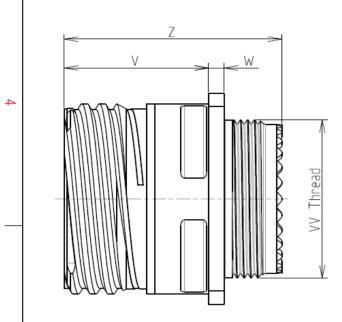

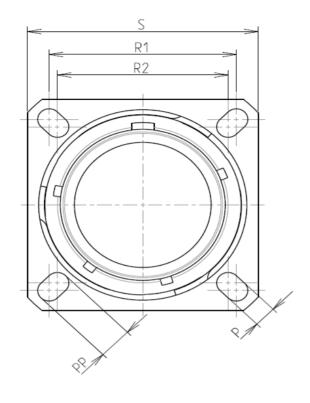

LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

ယ

 \sim

-Mass

BASIC SERIES:

SHELL SIZE : 09

SHELL TYPE : Square Flange Receptacle

PLATING : Z = Black Zinc Nickel

Н

CONTACT TYPE : Standard Crimp Contact

-Standard : Based on MIL-DTL-38999 Series III

ł	-Shell Material	: Aluminium
	-Shell Plating	: Black Zinc Nickel
	-Insulator	: Thermoplastic
	-Contacts	: Copper Alloy
	-Seals & Grommet	: Silicon Elastomer
	-Contact Plating	: Gold over copper Alloy $0.8 \mu m$ minimum
	-Durability	: 500 Mating cycles
-Delivered with Souriau contacts and Accessories		
	-Temperature Range	: -65℃ to +175℃
	-Salt Spray	: 500 hours

: 10.73 g ± 10%

8D 0

G

09

Ζ

35

S

F

Е

Dim	Nominal
Р	3.25±0.2
PP	5.49±0.2
R1	18.26
R2	15.09
S	23.8±0.3
V	20.83+0/-1.25
W	2.1/2.5
Z	31.5 Max
VV THREAD	M12x1-6g


ORIENTATION : E

CONTACT LAYOUT : 09-35

CONTACT TYPE : SOCKET(500 Matings)

Е

SOURIAU shall not be liable for due to a use of the Products the Specifications issued by either (professional recommend

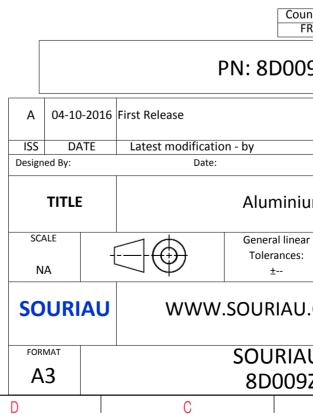

	Φ		A		
		- 10 H H			4
					3
AS EXA	AMPLE				3
any non-conformity or damage which does not comply with or of the Parties or by a third party adation, technical notice.)					
Intry R	Jurisd	liction & Con Not Listed			2
09Z35SE					
				MOD N°	
um	Receptacl		R DRAWING		
ar	NPRDS / PROJECT				
			159		1
J.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission					
	DRG N°			SHEET	
123	5SE-C B		A	1/2	J

	<u> </u>	۵	ات	m	D		0	
		Contact Layout					Pa	anel Cutou
4	-×($5 \oplus 1$ $4 \oplus 2$ 2×1 $4 \oplus 2$ 2×1 Contacts (Insert arrangement 9-35)				SQI M	UARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING	
	Cont posit ID 1 2 3 3 4 5 6 (Applicabl	Contact location X-axis Y-axis (mm) (mm) +.045 (1.14) +.078 (1.98) +.078 (1.98) 045 (1.14) +.000 (0.00) 090 (2.29) 078 (1.98) 045 (1.14) 045 (1.14) +.078 (1.98)						<u>3</u> 51
	Shell Arrangement Numb size no. conta 9 -35 6	er of Size Service Contact Supersedes acts contacts rating location					Dim	
ယ							ØA ØAA R1 ØT	
							SOURIAU shall not be lia due to a use of the Pro the Specifications issued b (professional reco	oducts whi y either of
0					Γ			Country FR
							PN: 8	D0092
					A ISS Designe	DATE	First Release Latest modification - by Date:	
					-	TITLE	Alu	minium
<u> </u>					SCAL	-		ral linear rances: ±
					SO	URIAU	WWW.SOUF	RIAU.C
					FORM			JRIAU 009Z3
	Н	G	F	E	D		С	

