


APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	9/25/20	

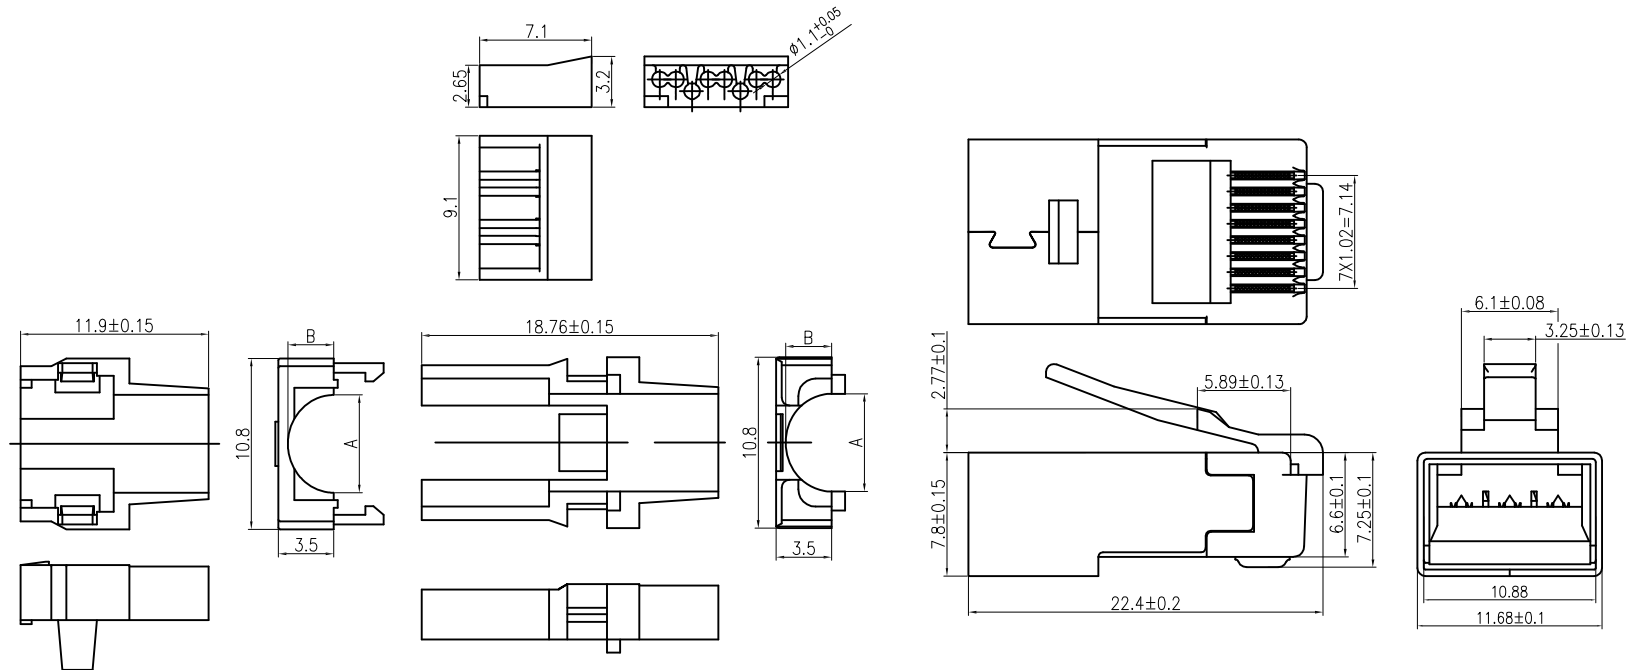

ADAM P/N	DIM A	DIM B
MTP-88-X-S-C6A1	6.18MM	2.90MM
MTP-88-X-S-C6A2	6.40MM	3.00MM

" X "	PLATING
X	Gold flash
U	15 µin Gold
W	30 µin Gold
G	50 µin Gold

SPECIFICATIONS:

Material:
 Insulator: PC, Color: Clear
 Contacts: Copper Alloy
 Shield: H65Y
 Plating:
 Gold over Nickel underplate on contact area
 Electrical:
 Voltage rating: 150 VAC rms
 Current rating: 1.5 Amp
 Contact resistance: 20 mohms max
 Insulation resistance: 1000 Mohms min @ 500 VDC
 Dielectric withstanding voltage: 1,000 VAC rms For 1 Minute
 Mechanical:
 Wire range: 23~24AWG, Ø0.99mm~1.09mm
 Temperature Rating:
 Operating temperature: -25°C to +55°C
 Environmental:
 Lead free, RoHS compliant.



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MILLIMETERS TOLERANCES: EXCEPT AS NOTED		
0~15 15~30 30~	MM ± 0.15 ± 0.20 ± 0.25	
ANGLE ± 1°		
APPROVALS		DATE
DRAWN	LH	9/25/20
CHECKED	AY1	9/25/20
APPROVED		

ADAM TECH
INTERCONNECTS
 909 Rahway Avenue,
 Union, NJ 07083
 Phone: 908-687-5000
 Fax: 908-687-5710

TITLE MODULAR TELEPHONE PLUG, 8P8C, SOLID WIRE CONTACTS, CAT 6A		
SIZE X	PART NO. MTP-88-X-S-C6AX	REV. -
REF: S00005C	SCALE: NTS	SHEET 1 OF 1