
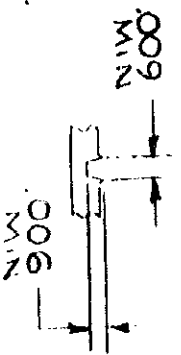
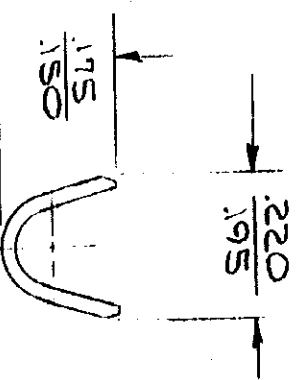

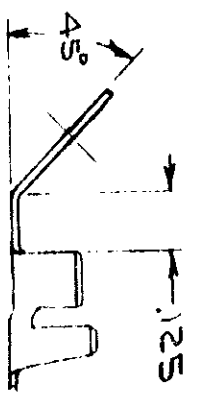


NUMBER  
485044

Unpublished copy not to be reproduced nor published without written permission of AMP Incorporated

DIMENSIONS IN INCHES. DO NOT SCALE PRINT.

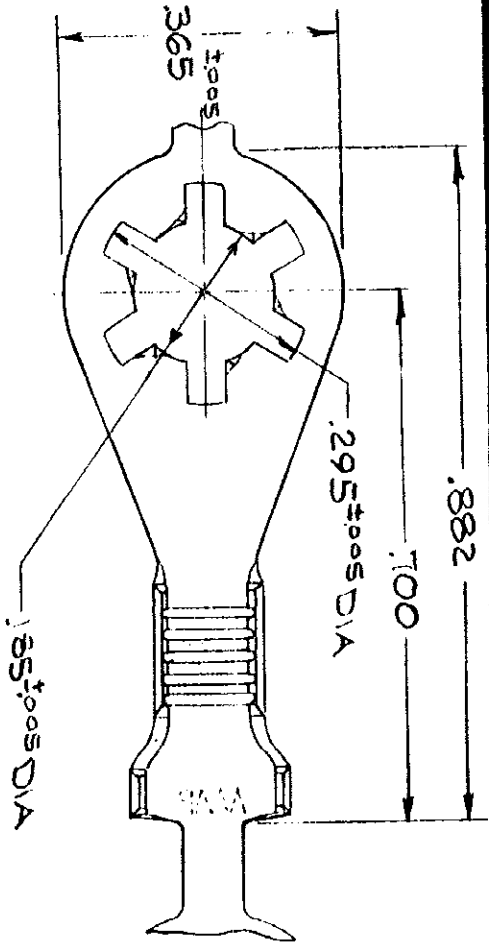

CONTINUOUS STRIP, ON REELS

TERMINAL NO STRAIGHT	TERMINAL NO BENT
485044-1	485044-1A

△ SUFFIX LETTER MUST BE USED ONLY WHEN ORDERING APPLICATOR TOOLING

SERRATION DETAIL

F	CHANGED STUD HOLE	V.	0203	1/6/71
E	REVISED & RELEASED	V.	0191	2/3/71
D	REVISED TYPES AND INSULATION SUPPORT	V-210	0175	3/24/71
C	REVISED AND RELEASED	V.	0152	3/2/71
B	ADDED .290±.005	#		1/27/71
A	ADDED SEPARATION DETAIL	#		1/24/70
WAS	P-10-19134			
REVISION RECORD	ECN	DR	CHK	DATE
BY	REVISION RECORD	BY	CHK	DATE
CHK	BY	CHK	DATE	

©1970 BY AMP INCORPORATED. ALL RIGHTS RESERVED. AMP PRODUCTS COVERED BY PATENTS AND/OR PATENTS PENDING MATERIAL AND FINISH  
NONE  
.028 LUBRONZE

CUSTOMER COPY REFERENCE ONLY  
AMP INCORPORATED  
MARTINSBURG, PENNA.

WIRE - RANGE - INSULATION	TYPE	CLASS
18-14 MML080-120		
TOLERANCE EXCEPT AS NOTED ± 1° 0'	SCALE	
NAME	LOC	NO
RING, ANTIROTATION	M	A
AMPLIVAR		485044
	REV	F.