

MATERIALS AND FINISHES:

SMA PLUG STR IP68

BODY, COUPLING NUT, CRIMP TUBE BRASS
PLATED GOLD 30 MICROINCHES MIN.

CONTACT BRASS
PLATED GOLD 30 MICROINCHES MIN.

INSULATOR TEFLON

GASKET SILICONE RUBBER

SNAP RING BERYLLIUM COPPER

SHRINK TUBE VERSAFIT
OR EQUIVALENT



CABLE DIA 1.37

UFL

BODY PHOSPHOR BRONZE
PLATED GOLD 30 MICROINCHES MIN

INSULATOR PBT

CONTACT PHOSPHOR BRONZE
PLATED GOLD 30 MICROINCHES MIN

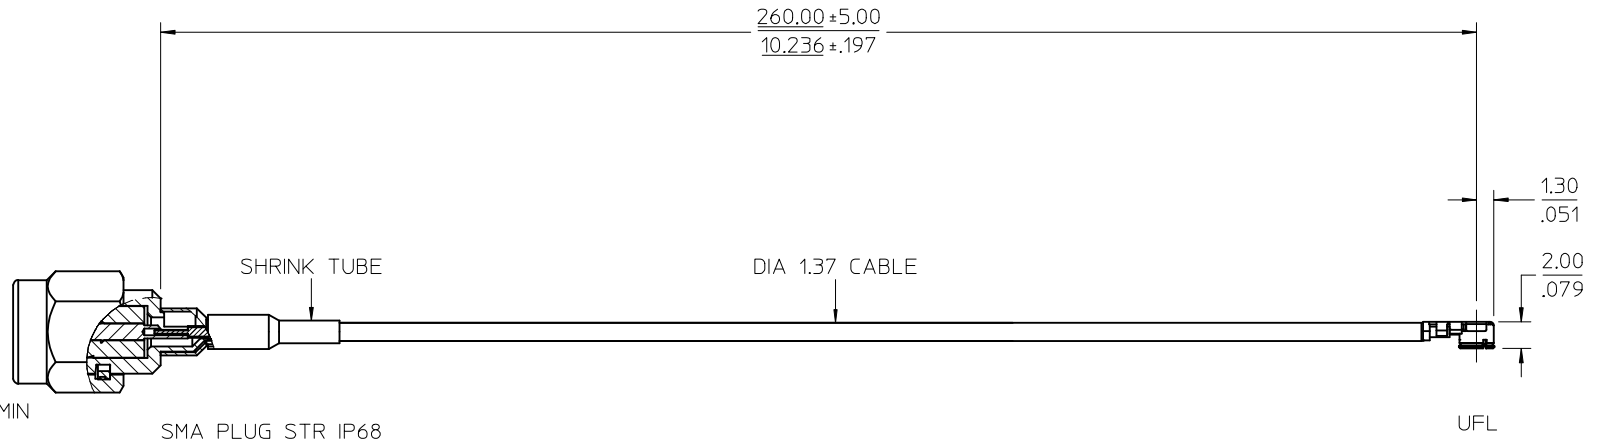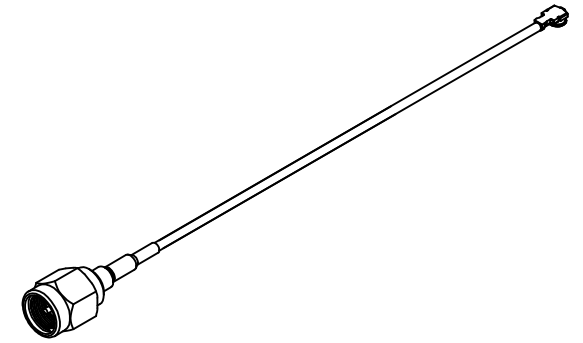

89762-4750	POLYBAG
PART NO	PACKAGING
MIL-STD-348A, FIG. 310.1	SMA INTERFACE
SPECIFICATION	DESCRIPTION

A	CHG:NEW RELEASE PER PDR13051321	2013/05/09	8	7	QUALITY SYMBOLS	▽=0
	EC NO: URF:2013-0662					▽=0
	DRW:RYEH					▽=0
	CHKD: APPR:MHUANG					DESCRIPTION
REV	A					

GENERAL TOLERANCES (UNLESS SPECIFIED)	DIMENSION STYLE	SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION
	MM/IN	3.5:1	METRIC	
4 PLACES ± --- ± ---	DRAWN BY	DATE	CA SMA PLUG STR TO UFL W/DIA 1.37 CABLE CA-SMAP/UFL	
3 PLACES ± --- ± ---	CHECKED BY	DATE		
2 PLACES ± --- ± ---	JOANNE LIAO	2013/05/06		
1 PLACE ± --- ± ---	APPROVED BY	DATE		
0 PLACE ± --- ± ---	MHUANG	2013/06/04	molex	
ANGULAR ± 2 °	MATERIAL NO.	DOCUMENT NO.	SD-89762-475	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	SIZE	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		SHEET NO. 1 OF 1