




<u>Characteristics</u>	<u>Band 1</u>	<u>Band 2</u>
Passband:	879-915 MHz	925-961 MHz
Bandwidth:	Fo ± 18 MHz	Fo ± 18 MHz
Passband Return Loss:	12 min	12 min
Passband Insertion Loss:	3.8 dB max	3.8 dB max
Passband Ripple:	2.5 dB max	2.5 dB max
Input / Output Impedance:	50 Ohms	50 Ohms
Isolation:	50 dB min	50 dB min
Power Handling:	5 W	5 W

<u>Mechanical</u>	
Mounting Method:	SMT
Dimensions:	42.90 x 40.95 x 9 mm

<u>Environmental</u>	
Operating Temperature:	-40 to +70 deg.C
Storage Temperature:	-50 to +90 deg.C

This product is RoHs compliant.

Outline Drawing:

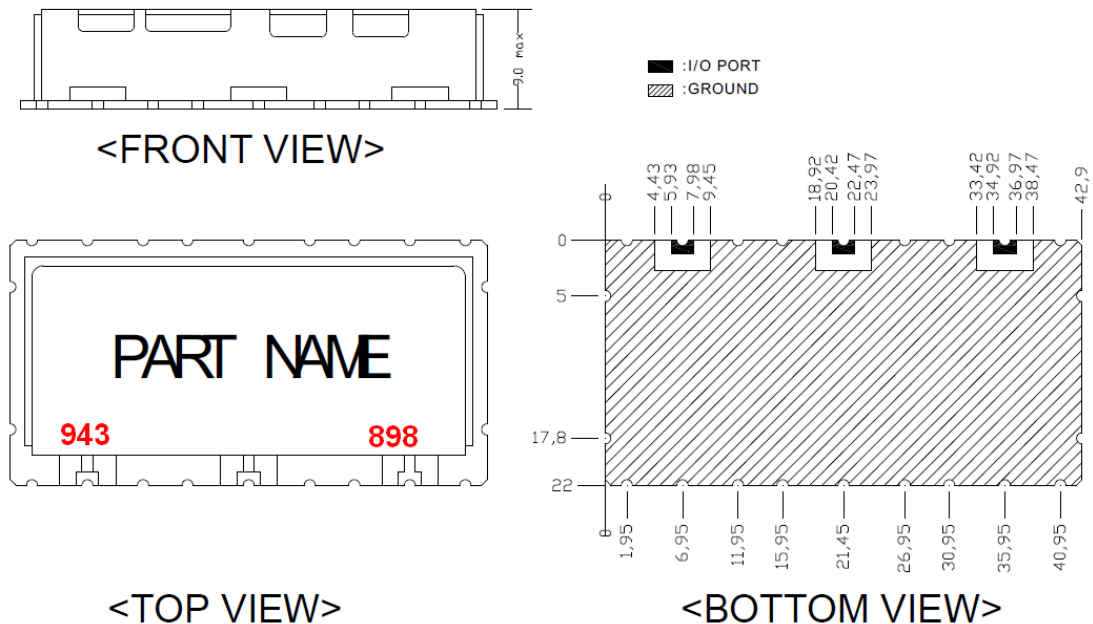



Foot Print:

