

Housing - HC-B 10-TMQ-52/O1PG16S - 1673627

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://download.phoenixcontact.com>)

Sleeve housing, for double locking latch, height 52 mm, without screw connection, 1x Pg16, lateral cable entry



The illustration shows versions for double locking latch and single locking latch and with double locking latch



Key commercial data

Packing unit	1 PCE
Weight per Piece (excluding packing)	208.2 GRM
Custom tariff number	85389099
Country of origin	Germany

Technical data

Dimensions

Height	52 mm
Width	43 mm
Length	73 mm
Wrench size, union nut	22 mm
External cable diameter	7.5 mm ... 15 mm

Ambient conditions

Degree of protection of housing (IP)	IP65
Ambient temperature (operation)	-40 °C ... 125 °C

General

Note	For contact inserts HC-B10, BB18, DD42, M, K8/24
Design	B10
Housing type	Sleeve housings

Housing - HC-B 10-TMQ-52/O1PG16S - 1673627

Technical data

General

Locking type	With double locking latch
No. of cable exits	1
Cable exit	Lateral
Screw connection	None
Type of the screw connection	1x Pg16
Housing material	Aluminum die-cast
Housing surface material	Powder-coated, gray
Material lock	Stainless steel, handle: PA
Material grip body interlock	PA

Classifications

eCl@ss

eCl@ss 4.0	27140816
eCl@ss 4.1	27140816
eCl@ss 5.0	27143424
eCl@ss 5.1	27143424
eCl@ss 6.0	27143424
eCl@ss 7.0	27440209
eCl@ss 8.0	27440209

ETIM

ETIM 2.0	EC000437
ETIM 3.0	EC000437
ETIM 4.0	EC000437
ETIM 5.0	EC000437

UNSPSC

UNSPSC 6.01	31261502
UNSPSC 7.0901	31261502
UNSPSC 11	31261502
UNSPSC 12.01	31261502
UNSPSC 13.2	31261502

Approvals

Approvals

Housing - HC-B 10-TMQ-52/O1PG16S - 1673627

Approvals

Approvals

GOST

Ex Approvals


Approvals submitted

Approval details



Drawings

Dimensioned drawing

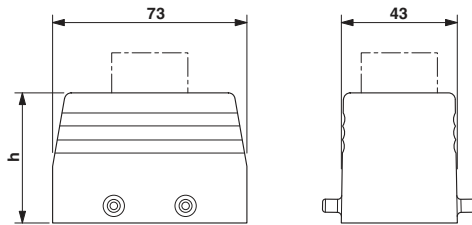

Housing - HC-B 10-TMQ-52/O1PG16S - 1673627

Dimensioned drawing

