



Contact block IP20 for position switch 3SE5250 open type design 1 NO/1 NC quick action contact

| | |
|---|---|
| product brand name | SIRIUS |
| product designation | contact |
| product type designation | 3SE5 |
| General technical data | |
| product function positive opening | Yes |
| insulation voltage rated value | 400 V |
| degree of pollution | class 3 |
| surge voltage resistance rated value | 6 kV |
| protection class IP | IP20, conductor connected and clamping screw screwed in |
| shock resistance | |
| • according to IEC 60068-2-27 | 30g / 11 ms |
| vibration resistance | |
| • according to IEC 60068-2-6 | 0.35 mm/5g |
| mechanical service life (switching cycles) typical | 15 000 000 |
| electrical endurance (switching cycles) at AC-15 at 230 V typical | 100 000 |
| electrical endurance (switching cycles) with contactor 3RH11, 3RT1016, 3RT1017, 3RT1024, 3RT1025, 3RT1026 typical | 10 000 000 |
| Electrical operating cycles in one hour with contactor 3RH11, 3RT1016, 3RT1017, 3RT1024, 3RT1025, 3RT1026 | 6 000 |
| thermal current | 10 A |
| reference code according to IEC 81346-2 | S |
| continuous current of the C characteristic MCB | 1 A; for a short-circuit current smaller than 400 A |
| continuous current of the quick DIAZED fuse link | 10 A; for a short-circuit current smaller than 400 A |
| continuous current of the DIAZED fuse link gG | 6 A |
| active principle | mechanical |
| repeat accuracy | 0.1 mm |
| Substance Prohibitance (Date) | 07/01/2006 |
| width of the sensor | 25 mm |
| operating frequency rated value | 50 ... 60 Hz |
| number of NC contacts for auxiliary contacts | 1 |
| number of NO contacts for auxiliary contacts | 1 |
| operational current at AC-15 | |
| • at 24 V rated value | 6 A |
| • at 125 V rated value | 6 A |
| • at 240 V rated value | 6 A |
| • at 400 V rated value | 4 A |
| operational current at DC-13 | |
| • at 24 V rated value | 3 A |

| | |
|--|---------|
| <ul style="list-style-type: none"> • at 125 V rated value • at 250 V rated value • at 400 V rated value | 0.55 A |
| | 0.27 A |
| | 0.12 A |
| design of the interface for safety-related communication | without |

Enclosure

| | |
|--------------------------|-------------|
| coating of the enclosure | Other types |
|--------------------------|-------------|

Drive Head

| | |
|---|----------------------|
| design of the switching function | positive opening |
| circuit principle | snap-action contacts |
| number of switching contacts safety-related | 1 |

Connections/ Terminals

| | |
|--|--|
| type of electrical connection | screw-type terminals |
| type of connectable conductor cross-sections | |
| <ul style="list-style-type: none"> • solid • finely stranded with core end processing • at AWG cables solid • at AWG cables stranded | 1x (0.5 ... 1.5 mm ²), 2x (0.5 ... 0.75 mm ²) 1x (0.5 ... 1.5 mm ²), 2x (0.5 ... 0.75 mm ²) 1x (20 ... 16), 2x (20 ... 18) 1x (20 ... 16), 2x (20 ... 18) |

Communication/ Protocol

| | |
|-------------------------|---------|
| design of the interface | without |
|-------------------------|---------|

Ambient conditions

| | |
|--|----------------------------------|
| ambient temperature | |
| <ul style="list-style-type: none"> • during operation • during storage | -25 ... +85 °C -40 ... +90 °C |
| explosion protection category for dust | none |

Installation/ mounting/ dimensions

| | |
|-------------------|------------------|
| mounting position | any |
| fastening method | snap-on mounting |

Certificates/ approvals

General Product Approval



[Confirmation](#)



[KC](#)

| | | |
|--------------------------|---------------------------|-------|
| General Product Approval | Declaration of Conformity | other |
|--------------------------|---------------------------|-------|



EG-Konf.



[Confirmation](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3SE5050-0CA00>

Cax online generator



<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3SE5050-0CA00>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3SE5050-0CA00>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3SE5050-0CA00&lang=en

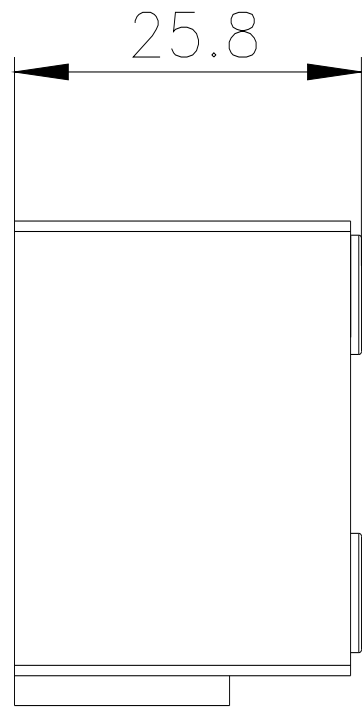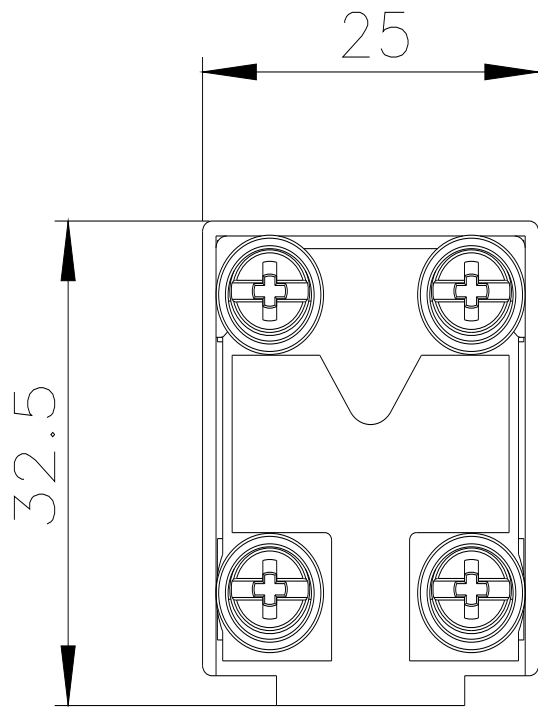

last modified:

12/21/2020 