

REV. 1


DCO 141326

COIL: @ 25°C	
RESISTANCE	56 OHMS ± 10%
NOMINAL VOLTAGE	6.0 VDC
MUST OPERATE	2.7 VDC
MUST RELEASE	1.6 VDC MAX, 0.3 VDC MIN.

ENVIRONMENT:	
VIBRATION	10 CPS TO 3000 CPS @ 30 g's
SHOCK	75 g's 6 MS. DURATION
TEMPERATURE	-65 °C TO +125 °C

NOTES: OPERATE & RELEASE 4 MS MAX.
BOUNCE 2 MS MAX.

CUSTOMER DATA SHEET

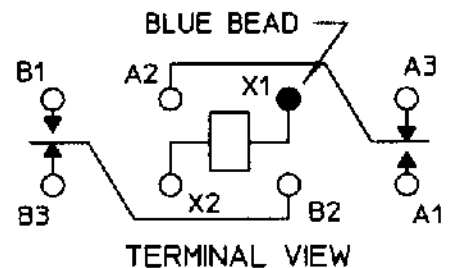

CONTACT RATING: LOW LEVEL TO
2 AMPS 28 VDC RESISTIVE
50,000 OPERATIONS

DR. R.B. 4/29/98 CK. G9H 9/20/99



CUST. QPL
CUST. NO. M39016/13-055L REV.

'3SBC' RELAY

3SBC1501A2