


NDB1L 240V Ground Fault Circuit Breakers



NDB1L DIN rail mounted GFCI circuit breakers protect circuits by sensing when a ground fault or earth leakage is greater than 30mA and automatically opens the circuit. These GFI circuit breakers are available from 6 Amps to 32 Amps, feature LED visual indicator, rated for a C trip curve, RoHS compliant, and UL1053 Recognized.


Features:

- UL1053 Recognized
- Convenient DIN Rail Mounting
- Visual Trip Indicator
- Push to test button
- Screw clamp, shock-proof wire terminations
- RoHS compliant

| Poles | Width (mm) | Rated Current (A) | Leakage Current (mA) | Product Type |
|--------------------------------------------------------------------------------------------|------------|-------------------|----------------------|-------------------|
| N+1P  | 36 | 6 | 30 | NDB1L-32C-6-240V |
| | | 10 | | NDB1L-32C-10-240V |
| | | 16 | | NDB1L-32C-16-240V |
| | | 20 | | NDB1L-32C-20-240V |
| | | 25 | | NDB1L-32C-25-240V |
| | | 32 | | NDB1L-32C-32-240V |

The main features of the NDB1L RCD DIN rail mounted GFCI breakers include:

- UL1053 Recognized
- EZ Install DIN Rail Mounting
- Visual Trip Indicator
- 30mA Earth Leakage Limit
- General Purpose C Trip Curve
- 120 Vac and 240 Vac
- 2 Pole RCCB = 1 pole + Neutral
- Available in 6, 10, 16, 20, 25 and 32 Amp
- Screw Clamp, Shock Proof Wire Connections
- RoHS Compliant

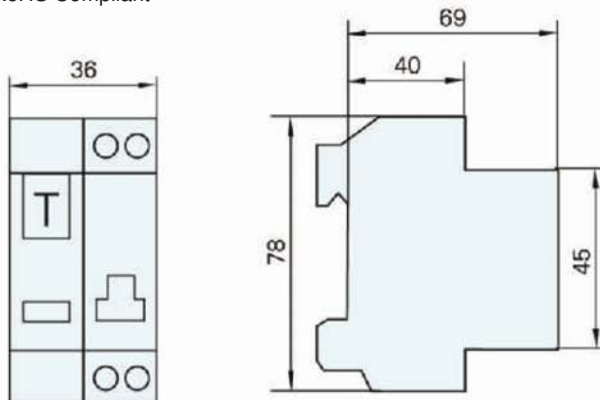

Medium trip, for use with most industrial loads

