

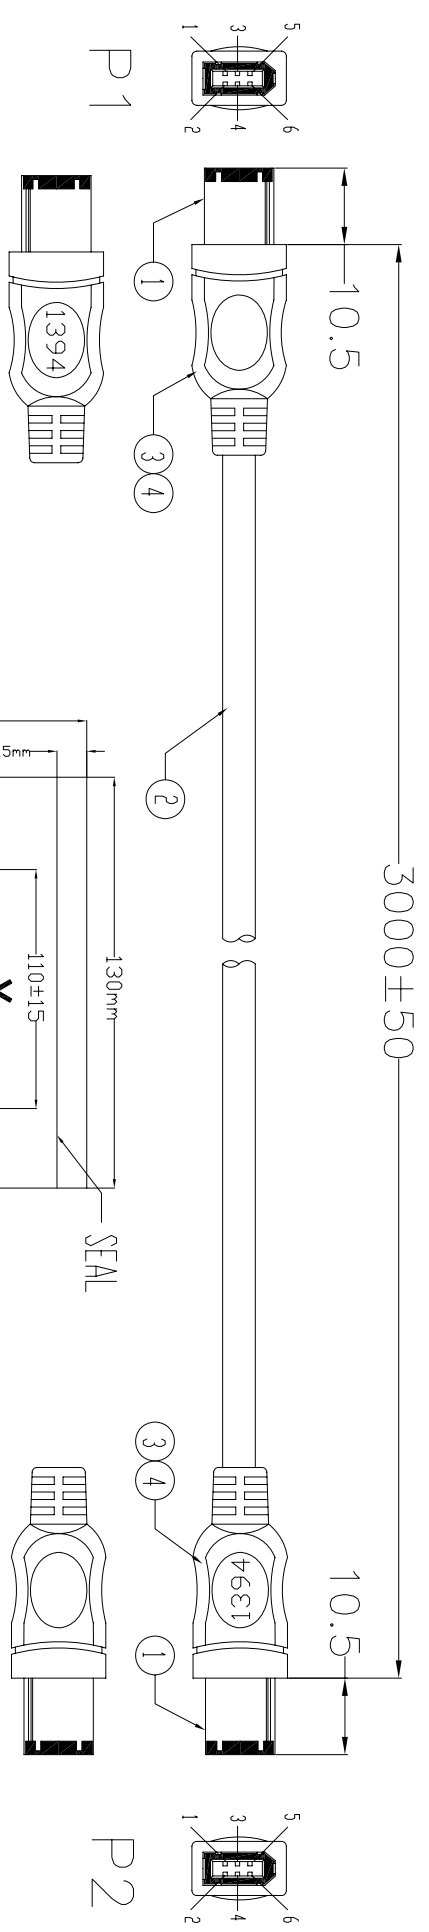


UNIT:MM

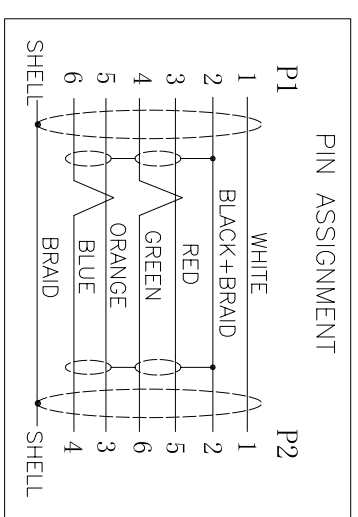

**Electrical test:**  
 1. 100% short, open, miswire test  
 2. Conduct resistance: 5 Ohm(max)  
 3. Insulation resistance: 5Mohm(min)  
 4. dielectric test: DC 300V

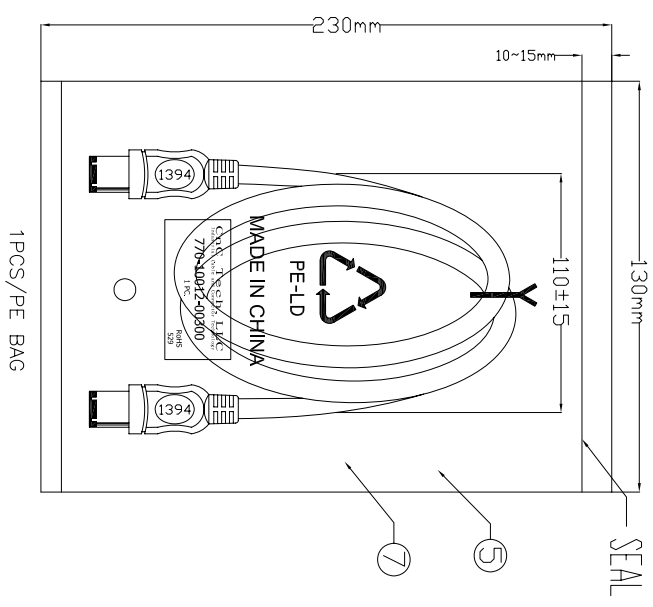

⑦	TIE	1	BLACK L=100mm
⑥	PE BAG	1/10	CLEAR SIZE: 280*330*0.05mm PRINT BLACK*MADE IN CHINA*+*10PCS*及印生产周期,有透气孔.
⑤	PE BAG	1	CLEAR SIZE: 130*230*0.05mm PRINT BLACK*MADE IN CHINA*+*1PC*及印生产周期,有透气孔.
④	TUBE	4	HEAT SHRINK TUBE BLACK OD1.5*10MM
③	OUT JACKET	10g	BLACK 40P PVC (MOULD NO.:WM-38)
②	CABLE	1	UL20276 (28AWG/1P+AL/NY+B)*2C+22AWG*2C+MAB JACKET:BLACK OD6.0mm L=3000±20mm
①	CONN	2set	IEEE 1394 6P MALE PIN G/F INSULATION BLACK SHIELD NICKEL PLATED
NO.	NAME	Q'TY	SPECIFICATION

**Cnc Tech, LLC**  
 Industrial Cable and Connector Technology

DRAWN BY	ZHONGHS	DRAWING NO.	
CHECKED BY		CUSTOMER	
APPROVAL BY		ITEM NO.	770-10012-00300
DECIDE BY		DATE	2012-02-06
VERSIONS/EDITION	A/0	PROJECTION	