


NO. OF CONTACTS	DIMENSIONS	
	B	A
2	4	2
3	6	4
4	8	6
5	10	8
6	12	10
7	14	12
8	16	14
9	18	16
10	20	18
11	22	20
12	24	22
13	26	24
14	28	26
15	30	28
16	32	30
17	34	32
18	36	34
19	38	36
20	40	38
21	42	40
22	44	42
23	46	44
24	48	46
25	50	48
26	52	50
27	54	52
28	56	54
29	58	56
30	60	58
31	62	60
32	64	62
33	66	64
34	68	66
35	70	68
36	72	70
37	74	72
38	76	74
39	78	76
40	80	78

SPECIFICATIONS

Current Rating: 1 Amp
 Insulator Resistance: 5000 Megohms min.
 Dielectric Withstanding: 500VAC
 Operating Temperature: -40 Degrees C. to +105 Degrees C.
 Contact Material: Brass
 Insulator Material: PBT, UL 94V-0
 Contact Finish: Overall Gold or Selective Plating Gold/Tin

Standard Part is:
 PBT
 Overall Gold Flash plating

Contact Sullins Electronics
 for additional plating options
 available.

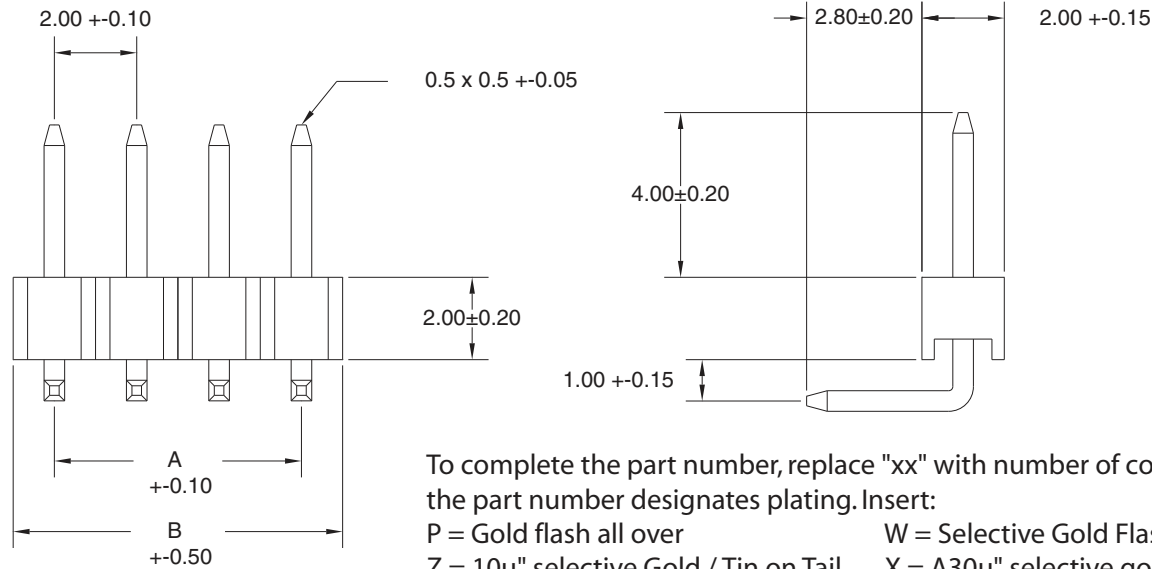

A 11-27-02 Added information notes

Sullins 801 E. MISSION RD. SAN MARCOS, CA 92069	GENERAL TOLERANCE		SCALE	6:1	DRAWN	DATE	DWG. NO.	T0015	TITLE	REV.	A
	XX. +	XXX. +	UNIT	MM	CHECK	DATE	PARTS NO.			SHEET	
	.X + 0.20	.XXX +	SIZE	A4	APPROVE	DATE	PR_Nxx1PARN				
	.X + 0.10	X.B +									
	.XX + 0.05	.XB +									

A

B

C

D

E