
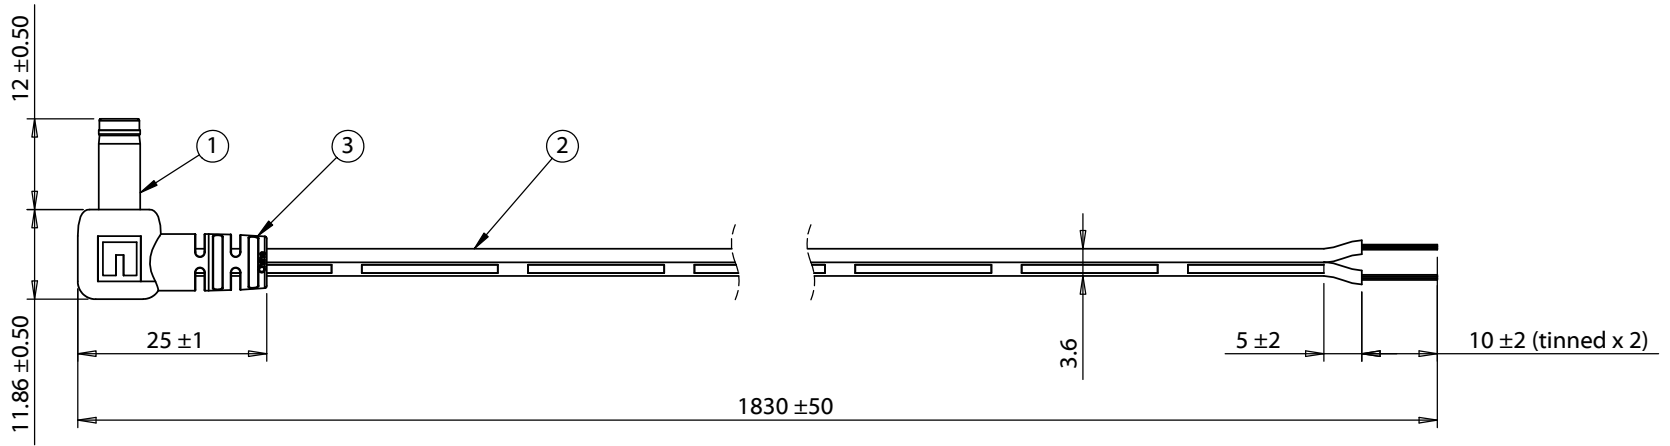


ITEM NO.	PART NUMBER	DESCRIPTION	QTY.	COMPONENT NOTES
1	50-00186	Connector, dc plug, 5.5x2.1xL20.5 mm, molding style, spring contacts	1	
2	30-00003	Wire, 2C BC, 24 AWG, UL2468, 300V, 80C, 3.6 mm, VW-1, PVC, 76A	1	
3	24-00006	Overmold, PVC, black	1	

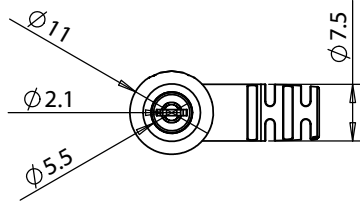

Notes:
Cables individually tied and bundled in groups of 10
Functionally equivalent components may be substituted

Wiring Diagram	
50-00186	wire color
center	black with stripe
sleeve	black

Revision:	Date:	Description:	Prepared:	Notes:	<h1>TENSILITY</h1> <p>tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com</p>	
A	6/28/2012	Initial release	GL Digitally signed by GL Date: 2016.11.28 15:27:03 -08'00'			RoHS compliant
			Verified:	Function test: no open, no short circuit, no intermittent	Description: Cable, 1830 mm, 5.5x2.1x12 mm 90° 50-00186 dc plug to stripped tinned, 24 AWG, 30-00003 wire	
			DN Digitally signed by DN Date: 2016.11.29 08:47:18 -08'00'			
			Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm			
					Size: A	Part number: 10-01064
					Scale: 1:2	Sheet 1 of 1

5



4

3

2

1