



THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

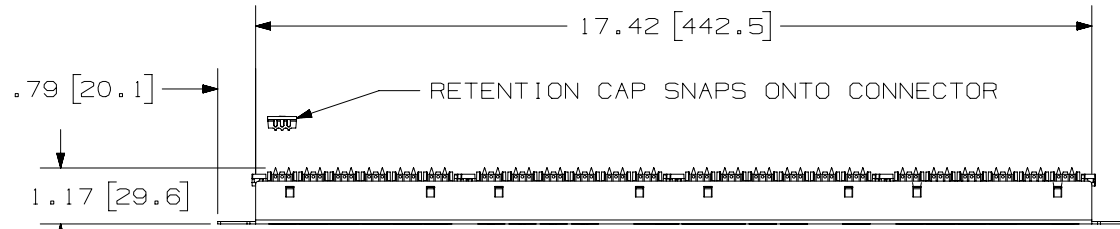

B

PANDUIT PART NO.	WEIGHT (APPROX.)
DP245E88TGY	1.25 lb (567 g)
DP245E88TGWH	1.25 lb (567 g)

- NOTES:
- SEE CURRENT CATALOG FOR VARIOUS APPLICATIONS AS WELL AS OPTIONAL ICONS.
  - MATERIAL:  
 PANEL HOUSING: STEEL  
 RJ45 MODULE: THERMOPLASTIC RESIN UL94V-0  
 PUNCHDOWN BLOCKS: THERMOPLASTIC RESIN UL94V-0  
 BEZEL ASSEMBLY: THERMOPLASTIC RESIN UL94H-B  
 RETENTION CAP: THERMOPLASTIC RESIN UL94V-0
  - 24 PORT PATCH PANEL 8 POSITION 8 WIRE.
  - THE PATCH PANEL IS DESIGNED FOR MOUNTING TO 19" UNIVERSAL RACKS.
  - FOUR (4) 12-24 X 1/2" ROUND HEAD SCREWS ARE PROVIDED FOR FASTENING TO RACKS.
  - DIMENSIONS IN [ ] ARE IN METRIC.
  - USE 110 STYLE TERMINATION TOOL FOR PUNCH DOWN.
  - RETENTION CAPS (ONE PER CONNECTOR) PROVIDED FOR SNAP-IN ON TERMINATED CONNECTORS.

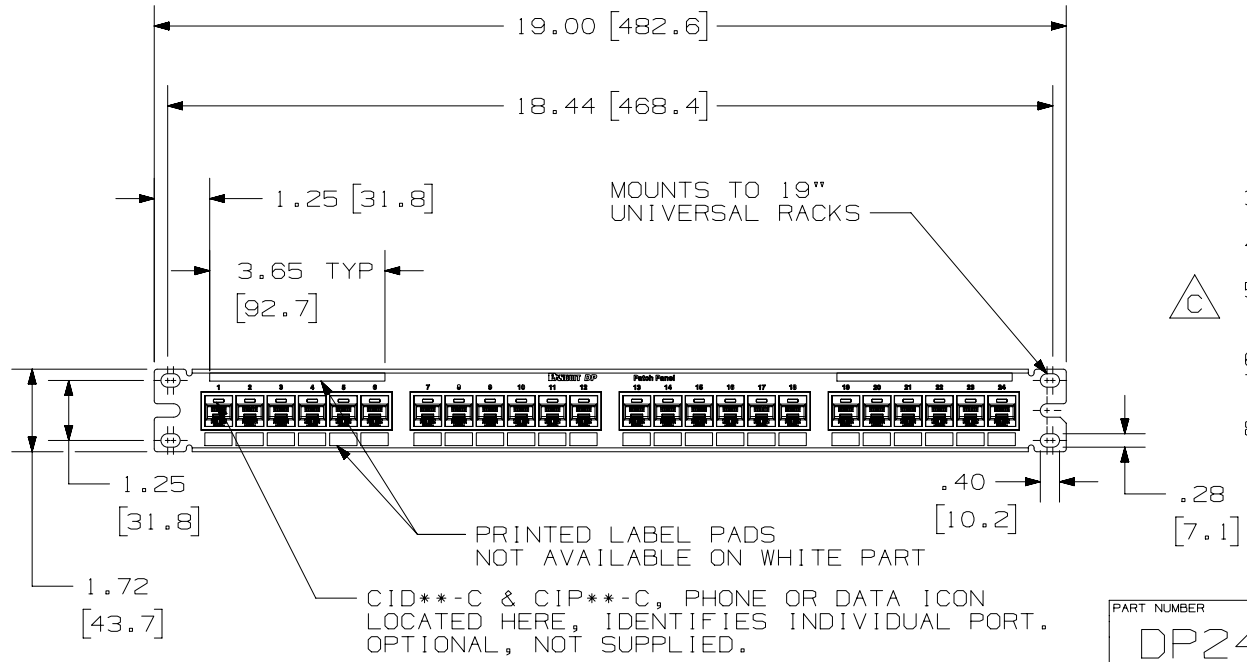

C

PART NUMBER <b>DP245E88TGY ; DP245E88TGWH</b>	
TITLE <b>DP5E 24 PORT PATCH PANEL</b>	
CUSTOMER DRAWING	
ITEM REVISION NAME <b>M02479JJ/01</b>	<b>PANDUIT</b>
DATASET FILE NAME <b>M02479JJ_DC246/01A</b>	
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [ mm ]	
.x ± .xx ± .03 (.8)	.xxx ± .010 (.3)
ANGLES ±	
THIRD ANGLE PROJECTION	
DRAWING NUMBER: <b>02479-246</b>	

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
2	9-27-18	BAME	KRKE	MMR	B. ADDED P/N DP245E88TGWH; C. REMOVED M6 SCREWS	M09000HW
1	3-12-14	MDJR	REFR	EJH	A. UPDATED TITLE BLOCK.	02479-246
R	3-3-06	LZ	CEF	CEF	RELEASED TO PRODUCTION	02479-246

D101000DA/14

2

1