


CABLE SPECIFICATION:

CONDUCTOR:
 MATERIAL: BARE COPPER
 SECTION: 22AWG/0.34mm²
 INSULATION:
 COMPOUND: TPE
 DIAMETER: 1.25 ±0.10mm
 JACKET:
 COLOR: BLACK
 COMPOUND: TPU
 DIAMETER: 5.50 ±0.20mm
 TEMPERATURE RANGE:
 STATIC: -40°C TO +90°C
 DINAMIC: -25°C TO +80°C
 VOLTAGE RATING: 600V

WIRING DIAGRAM

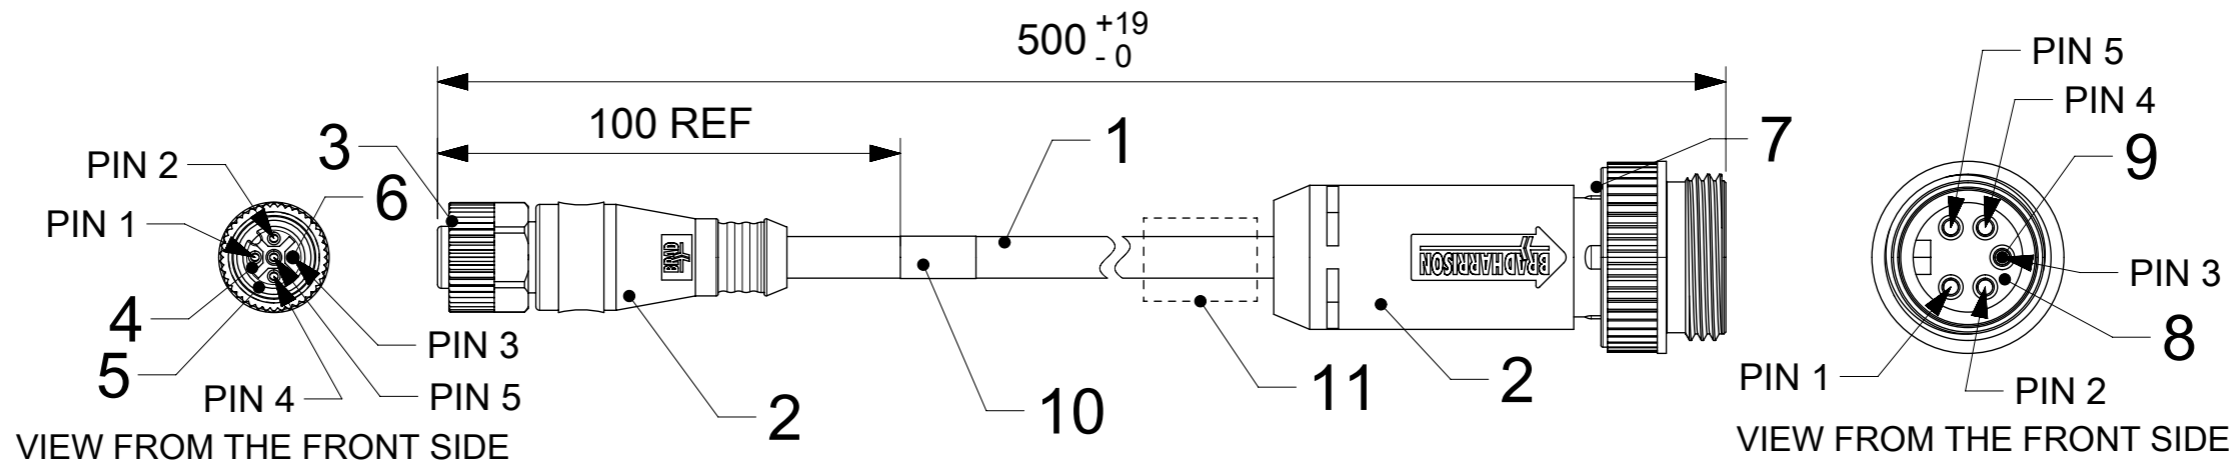

11	2	ID CARRIER	PVC	-
10	1	LABEL YE	VINYL	-
9	5	CONTACT MA	BRASS	Ni-PLATED
8	1	INSERT A-SIZE MA 5P BK	PUR	-
7	1	COUPLING NUT MA A-SIZE BK	ZINK ALLOY	-
6	5	CONTACT FE	CuSn6	GOLD OVER Ni-PLATED
5	1	GASKET RD	FPM	-
4	1	INSERT M12 FE 5P BK UNSH	ELASTOLLAN	-
3	1	COUPLING NUT HEX FE M12 BK	BRASS	Ni-PLATED
2	-	MOULDING MATERIAL GY	TPU	
1	-	CABLE 5x0.34 UNSH BK	TPU	-
ITEM	QTY.	DESCRIPTION	MATERIAL	FINISH

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

EC NO: 106067 DRWN: AKONDRACIUK CHK'D: MIWASIECZKO APPR: MIWASIECZKO	2016/06/20 2016/06/24	GENERAL TOLERANCES (UNLESS SPECIFIED) ANGULAR TOL ± ° 4 PLACES ± 3 PLACES ± 2 PLACES ± 1 PLACE ± 0 PLACES ±	DIMENSION UNITS: MM SCALE: 1:1 DRWN BY: AKONDRACIUK DATE: 2016/06/20 CHK'D BY: MIWASIECZKO DATE: 2016/06/24 APPR BY: MIWASIECZKO DATE: 2016/06/24			
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		DRAWING SIZE: A3 THIRD ANGLE PROJECTION			MC/MIC 5P M/MFE 0.5M ST/ST + ID
				PRODUCT CUSTOMER DRAWING		
				SERIES: 130039 MATERIAL NUMBER: 1300390680	CUSTOMER:	
			DOCUMENT NUMBER: 1300390680	DOC TYPE: PSD	DOC PART: 00P	SHEET NUMBER: 1 OF 1