

2.6 mm×1.6 mm SMD Light Touch Switches

Type: **EVPBB**




■ Features

- External dimensions: 2.6 mm×1.6 mm, Height 0.50 mm, 0.53 mm, 0.55 mm
- High operability
Equipped with an actuator (push plate)
- IP67

■ Recommended Applications

- Operation switches for Smartphone, Wearable devices (Smartwatch, Headset, Hearing aid)

■ Explanation of Part Numbers

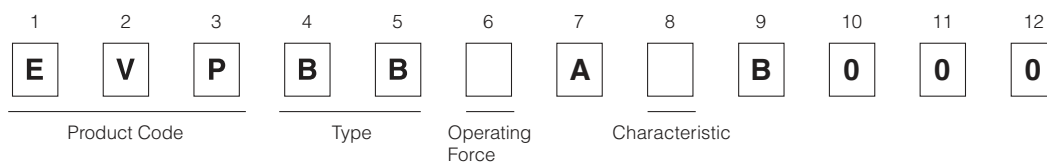

■ Specifications

| | | | | |
|-------------------------------|---------------------------------|--|---------------------|--------------|
| Type | | Snap action/Push-on type SPST | | |
| Electrical | Rating | 10 μA 2 V DC to 20 mA 15 V DC (Resistive load) | | |
| | Contact Resistance | 500 mΩ max. | | |
| | Insulation Resistance | 50 MΩ min. (at 100 V DC) | | |
| | Dielectric Withstanding Voltage | 250 V AC for 1 minute | | |
| | Bouncing | 10 ms max. (ON, OFF) | | |
| Mechanical | Operating Force | 0.7 N | 1.0 N | 1.6 N, 2.4 N |
| | Travel | 0.08 mm | 0.08 mm | 0.11 mm |
| Endurance | Operating Life | 200,000 cycles min. | 500,000 cycles min. | |
| IP67(*1) | IP6x (Dust resistance) | Dust : Talc (Type4) 8 h | | |
| | IPx7 (Water resistance) | Immersion depth : 1m 30min. | | |
| Operating Temperature | | -40 °C to +85 °C | | |
| Storage Temperature | | -40 °C to +85 °C (Bulk) -20 °C to +60 °C (Taping) | | |
| Minimum Quantity/Packing Unit | | 10,000 pcs. Embossed Taping (Reel Pack) | | |
| Quantity/Carton | | 50,000 pcs. | | |

Note: Non washable

(*1) IP67 : Switch shall not be operated during test.

Water or dust ingress shall be limited enough to prevent deleterious effect to the switch function.

However, IP67 shall be guaranteed under single product state,

then there is a possibility that IP67 performance become impaired depending on your mounting condition or usage.

So, please ask us in advance, if the switch is applied to important usage for water and dust resistant.

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use.
Should a safety concern arise regarding this product, please be sure to contact us immediately.

■ Dimensions in mm (not to scale)

EVPBB

(Embossed Taping)

General dimension tolerance : ± 0.05
() dimensions are reference dimensions.

Top view dimensions: 4 ± 0.35 , 2 ± 0.75 (2 ± 0.85), 0.05 min. , $(2-1.8)$, $(\phi 0.91)$, $(\phi 0.7)$.

Side view dimensions: $H \pm 0.1$ (0.35), 1.6 ± 0.1 (without the film and remainder of the gate).

Actuator cross section (Section C-C) dimensions: 2.6 ± 0.1 (Without the film), 3 ± 0.1 , (0.025) .

Stencil mask plan dimensions: $2-3.1$, $2-2.2$, $2-0.3$, $2-1.2$, $2-1.2$.

Land pattern plan dimensions: $2-3.2$, $2-2.1$, $2-0.2$, $2-1.3$, (1.6) , (2) .

Soldering thickness $t = 0.08 \pm 0.01$

* Soldering failure may occur depending on applied solder amount, so, please consider to use our recommended stencil and land pattern desing


▨ : Recommended land pattern area
 ▩ : No soldering area

- Any land pattern or via holes shall not be provided at ▩ area.
- If it's necessary to design land pattern or via holes at ▩ area, please apply resist to them to protect their metal part completely.
- If their metal parts are not protected completely, short circuit failure may occur by solder ball.
- Besides, there should be convexoconcave by designing additional pattern, it may cause swith tilt, influence on solder-ability or flux intrusion after reflow soldering.
- Therefore, please study any influence of additional land pattern or via holes at ▩ area in advance.

| Part Numbers | Operating Force | H=Height | Operating Life |
|--------------|-----------------|----------|----------------|
| EVPBB0AAB000 | 0.7 N | 0.50 mm | 200,000 cycles |
| EVPBB1AAB000 | 1.0 N | 0.50 mm | 500,000 cycles |
| EVPBB2A9B000 | 1.6 N | 0.53 mm | 500,000 cycles |
| EVPBB4A9B000 | 2.4 N | 0.55 mm | 500,000 cycles |

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use.
Should a safety concern arise regarding this product, please be sure to contact us immediately.


■ Recommended Reflow Soldering Conditions

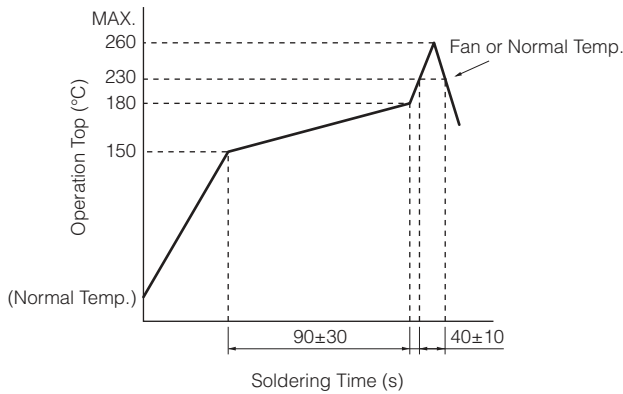

*Reflow temperature may vary by location even in the same reflow condition.
Please check the reflow temperature at terminals and at the top of a switch to make sure the both temperatures are within the specification.
If even one of them is out of the specifications, please adjust.

● Embossed Carrier Taping

Tape width=12.0 mm

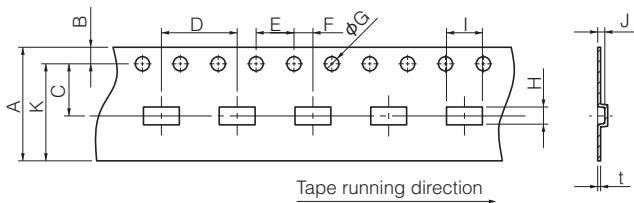

Taping condition : Lack of products in the middle of taping should be one MAX, but total quantity specified in the specifications should be secured.
Peeling off strength of top tape : It should be within 0.2N to 1.0N at 165 degree in peeling off angle.
Joint of carrier tape : One joint per one reel may exist.

Unit: mm

| Part No. | Height | A | B | C | D | E | F | G | H | I | J | K | t |
|----------|--------|----------|-----------|---------|---------|---------|---------|---------|-----------|---------|---------|---------|---------------------------------------|
| EVPBB | 0.50 | 12.0±0.3 | 1.75±0.10 | 5.5±0.1 | 8.0±0.1 | 4.0±0.1 | 2.0±0.1 | 1.5±0.3 | 1.95±0.20 | 3.3±0.2 | 0.7±0.2 | (10.25) | 0.3 ^{+0.15} _{-0.10} |
| | 0.53 | | | | | | | | | | | | |
| | 0.55 | | | | | | | | | | | | |

Guidelines and cautions for using the product technical information and the products displayed on this material

- The products described on this material were designed and manufactured for standard applications such as general electronics devices, office equipment, data and communications equipment, measuring instruments, household appliances and audio-video equipment. For special applications in which quality and reliability are required, or if the failure or malfunction of the products may directly jeopardize life or cause threat of personal injury (such as for aircraft and aerospace equipment, traffic and transport equipment, combustion equipment, medical equipment, accident prevention and anti-theft devices, and safety equipment), please use only after your company has sufficiently tested our products' suitability for that application.
- When using our products in equipment that requires a high degree of reliability, regardless of the application, it is recommended that you use protection circuits and redundancy circuits for equipment safety and test for safety.
- The products and product specifications described on this material are subject to change for improvement without prior notice. Therefore, be sure to request and confirm in advance the most current specifications, which explain the specifications in detail, before the final stage of your design, purchasing or use for any application.
- The technical information on this material provides examples of the products' typical operations and application circuits. It is not intended to guarantee the non-infringement of or grant license for intellectual property rights of this company or any third party.
- Permission must be obtained from the Japanese government if products, products specifications and technical information on this material that are subject to the "Foreign Exchange and Foreign Trade Law" are to be exported or taken out of Japan.
- The information contained on this material may not be reprinted or reproduced whether wholly or in part, without the prior written permission of Panasonic Corporation.

Safety Precautions

When using our products, no matter what sort of equipment they might be used for, be sure to confirm the applications and environmental conditions with our specifications in advance.

Please contact

Panasonic Corporation

Electromechanical Control Business Division

■ 1006, Oaza Kadoma, Kadoma-shi, Osaka 571-8506, Japan
industrial.panasonic.com/ac/e/

Panasonic[®]

©Panasonic Corporation 2018