


# SACC-V-3CON-PG9/B-1L-S

Order No.: 1671153



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1671153>

Valve connector, 3-pos., type B, 1 LED, with protective circuit, screw connection, cable screw connection Pg9

Commercial data	
GTIN (EAN)	4 017918 135003 
sales group	D123
Pack	5 pcs.
Customs tariff	85444290
Catalog page information	Page 111 (PC-2009)

#### Product notes

WEEE/RoHS-compliant since:  
06/20/2006



<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

## Technical data

General data	
Rated current at 40°C	4 A
Rated voltage	24 V
Number of positions	3
Volume resistance	≤ 4 MΩ
Insulation resistance	> 2 GΩ

Ambient temperature (operation)	-25 °C ... 60 °C (valve plug)
<b>General characteristics</b>	
Standards/regulations	Valve connector EN 175301-803
Surge voltage category	II
Pollution degree	3
Degree of protection	IP65
Contact material	CuSn
Contact surface material	Ag
Valve plug contact insert material	PBT
Material, housing, valve plug	PA
Type of connection	Screw connection
Conductor cross section stranded min.	0.34 mm <sup>2</sup>
Conductor cross section stranded max.	2.5 mm <sup>2</sup>
Conductor cross section AWG/kcmil min.	22
Conductor cross section AWG/kcmil max	13
External cable diameter	6 mm ... 8 mm
Status display	Yellow LED
Protective circuit/component	Z diode

#### Certificates / Approvals




Certification


GOST

## Diagrams/Drawings

### Dimensioned drawing

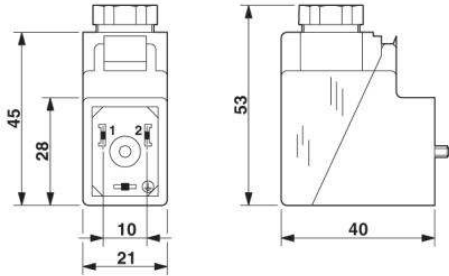

### Circuit diagram

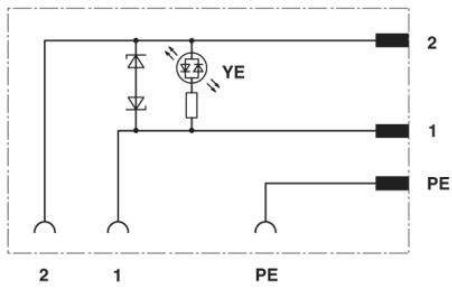

**Address**

PHOENIX CONTACT Inc., USA  
586 Fulling Mill Road  
Middletown, PA 17057, USA  
Phone (800) 888-7388  
Fax (717) 944-1625  
<http://www.phoenixcon.com>



© 2010 Phoenix Contact  
Technical modifications reserved;