
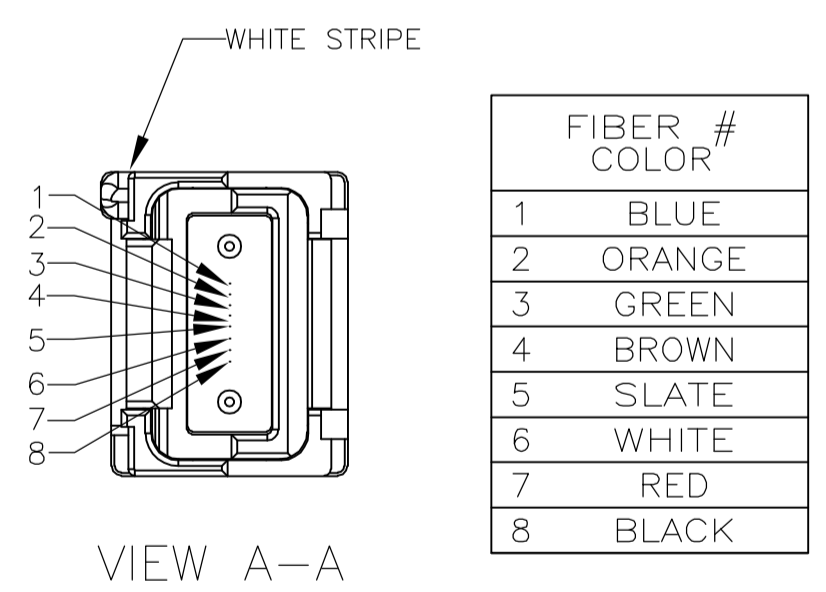


LOC	DIST	REVISIONS					
CE	16	P	LTR	DESCRIPTION	DATE	DWN	APVD
		A		NEW RELEASE	02FEB06	JWD	JD

1. MAXIMUM INSERTION LOSS: 1.0 dB (1310nm)
2. PRODUCT AND PROCESSING MUST MEET REQUIREMENTS OF TYCO ELECTRONICS STANDARD 230-702

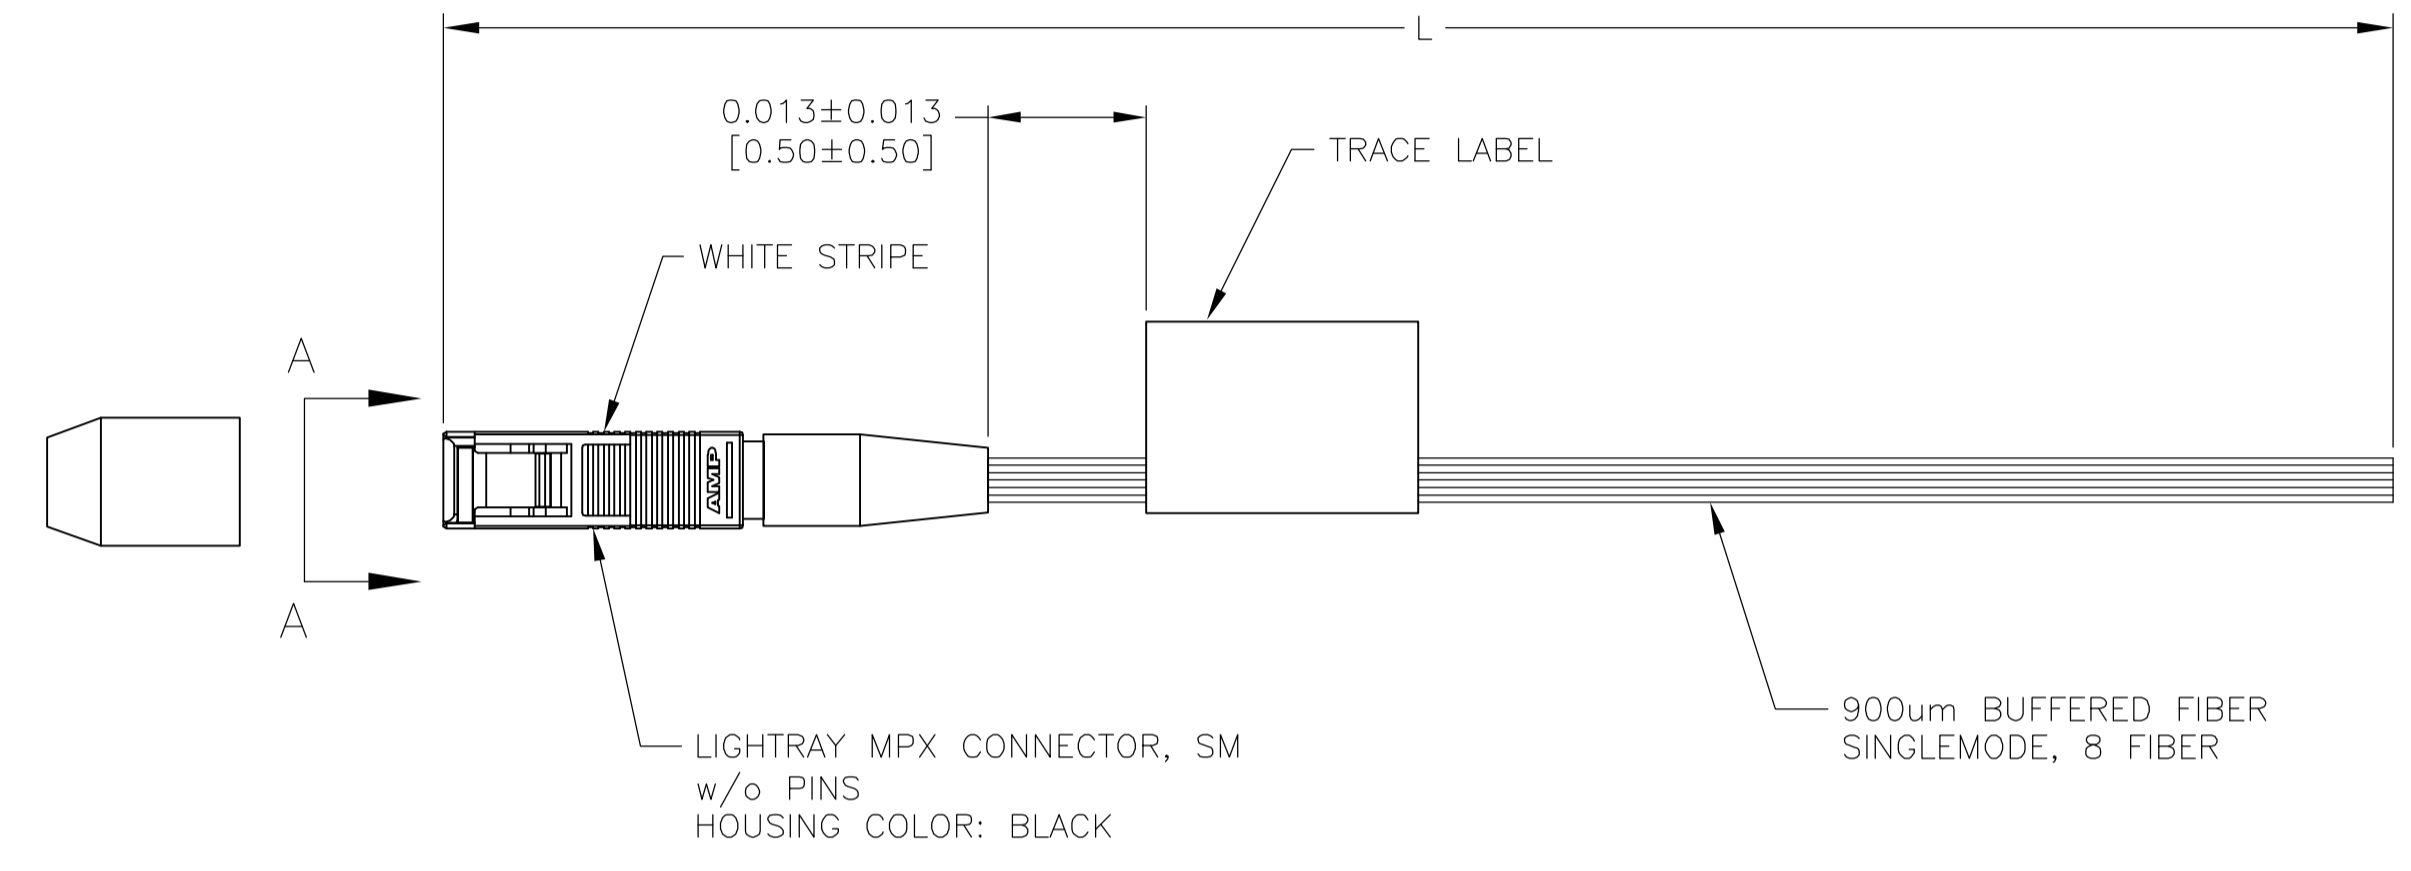

VIEW A-A
 LIGHTRAY MPX CONNECTOR FIBER PATH

0.480±0.030 [18.9±1.2]	6374537-3
2.000±0.051 [78.7±2.0]	6374537-2
1.000±0.051 [39.4±2.0]	6374537-1
L METERS [INCHES]	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J.W.DAVIS 02FEB06		Tyco Electronics Corporation Harrisburg, PA 17105-3608	
DIMENSIONS: METERS [INCHES]		CHK J.DUNCAN 02FEB06		NAME F.McCORKEL 02FEB06	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD F.McCORKEL 02FEB06	PRODUCT SPEC PIGTAIL, FIBER OPTIC, SINGLEMODE, (8) 900um BUFFERED FIBER CABLE LIGHTRAY MPX, NO PINS		
		0 PLC ± -	SIZE A2	CAGE CODE 00779	DRAWING NO 6374537
MATERIAL		1 PLC ± -	RESTRICTED TO		
		2 PLC ± -	SCALE NTS		
		3 PLC ± -	SHEET 1 OF 1		
		4 PLC ± -	REV A		
		ANGLES ± ± -	CUSTOMER DRAWING		
		FINISH -			

6374537