


PRODUCT NUMBER  
SEE SHEET 3

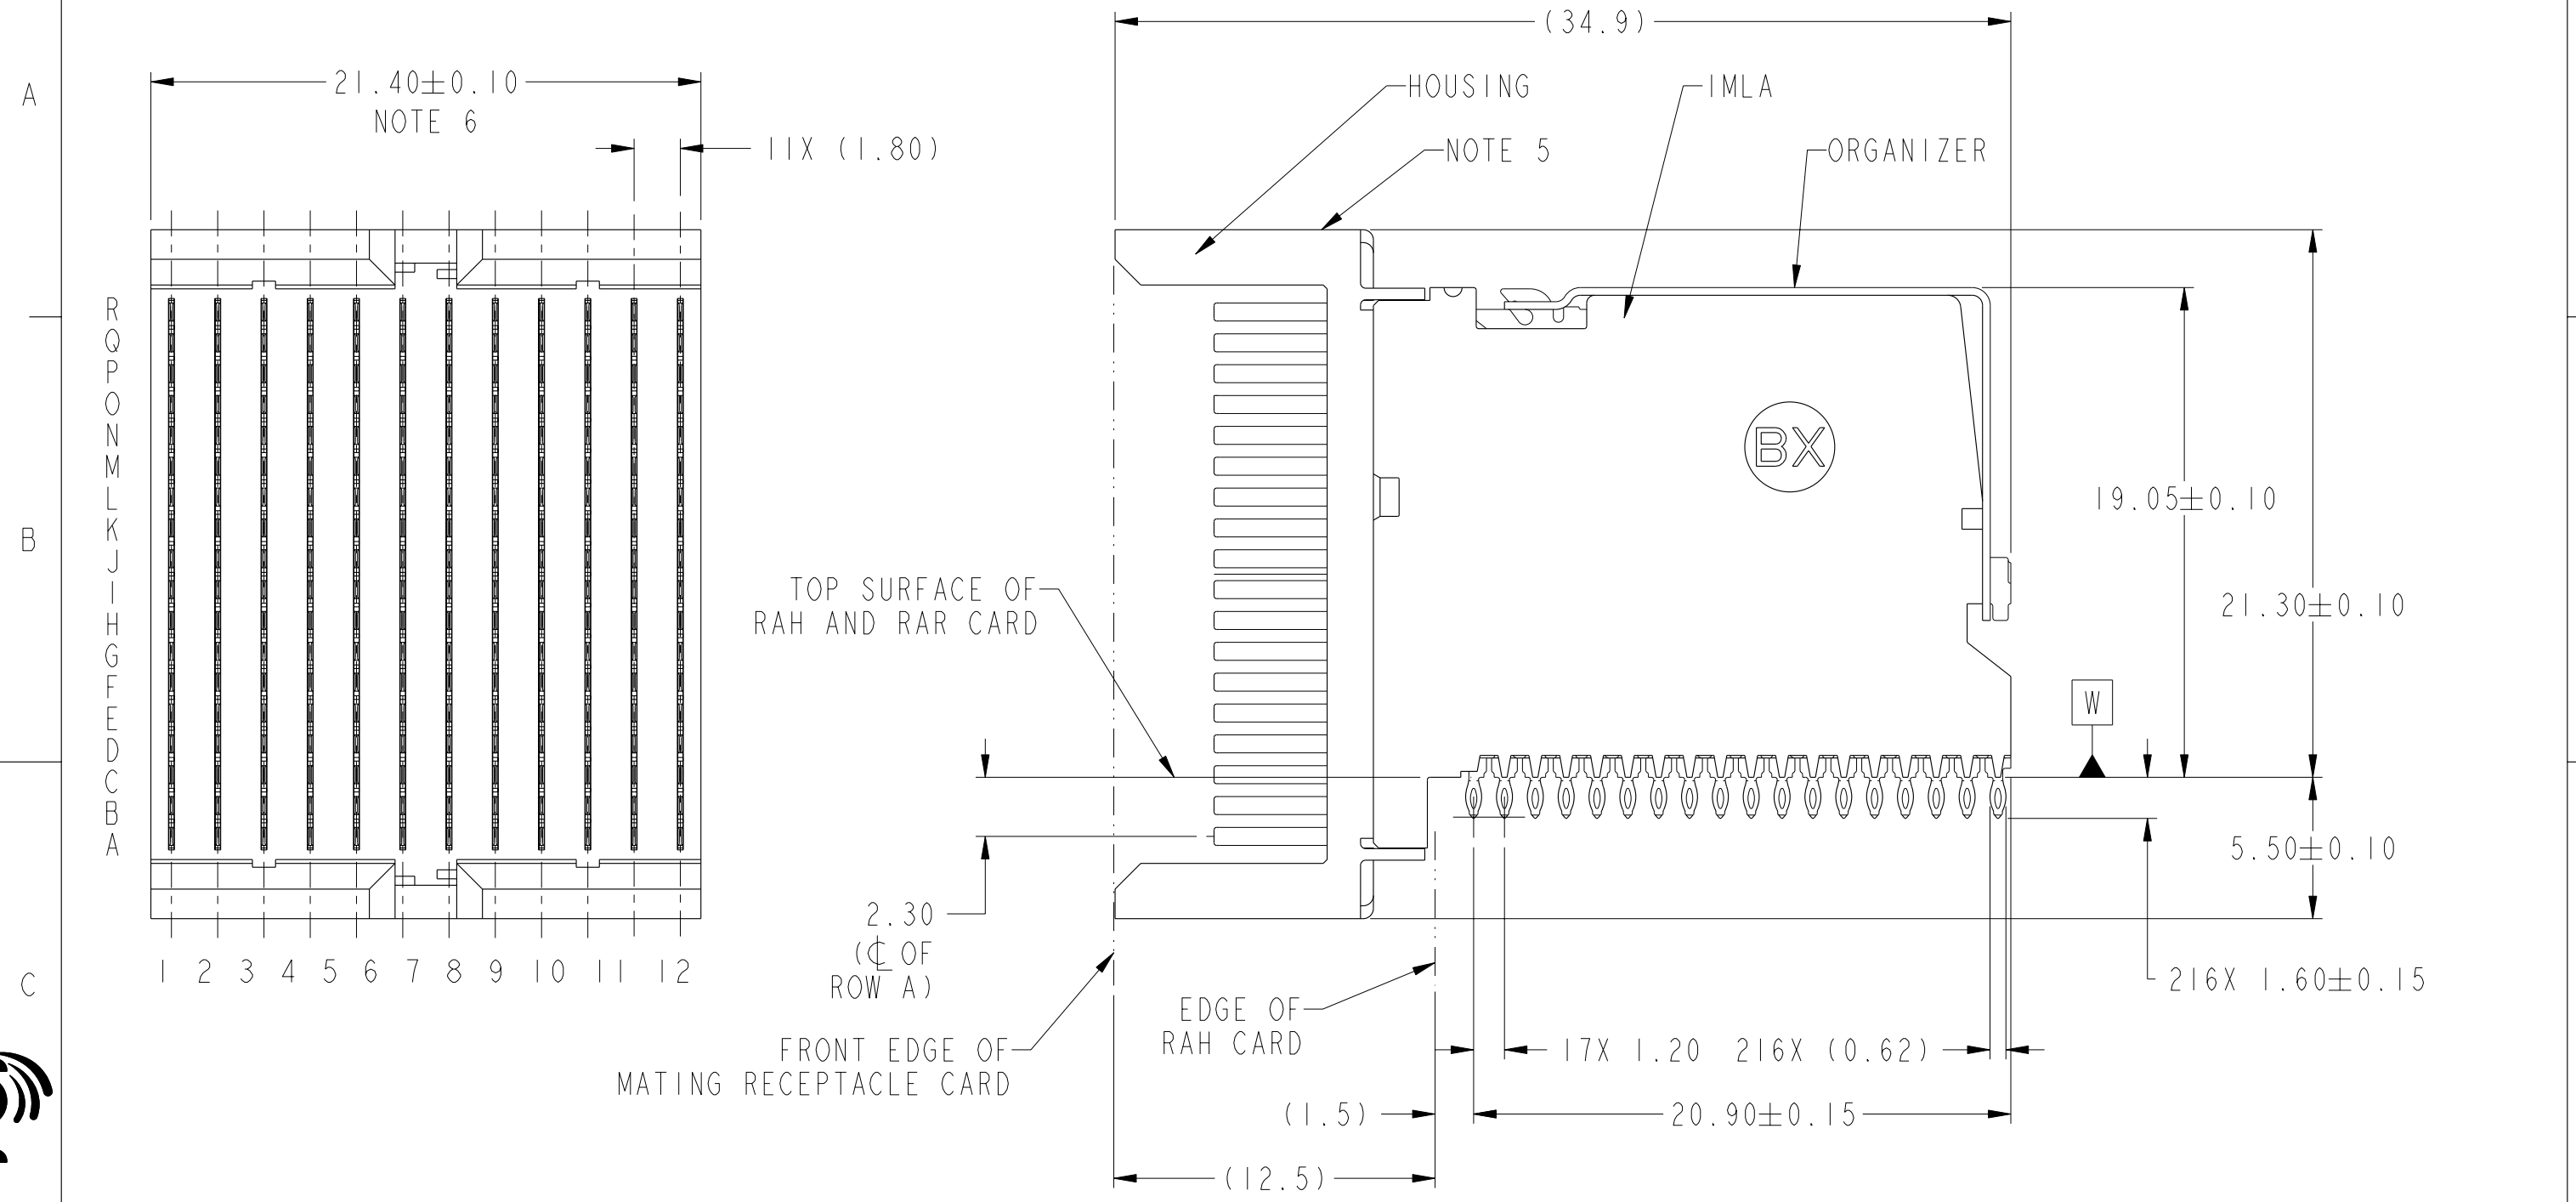

Copyright FCI.

rev	ecn no	dr	date
A	V09-0397	MRG	2009-07-28
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-

www.fciconnect.com		surface - ✓		tolerance std		projection		MM		
		TOLERANCES UNLESS OTHERWISE SPECIFIED				size A3		Scale 4:1		
Dr	T. HOUTZ	2008-10-30	ANGULAR	0.X	±	ECN		---		
Eng	M. GRAY	2008-10-30	LINEAR	0.XX	±	Spec ref		---		
Chr	M. GRAY	2008-10-30	0° ±°	0.XXX	±					
Appr	M. GRAY	2008-10-30	Product family		ZipLine		Spec ref		---	
FCI			ZipLine R/A HEADER ASSY			dwg no		10077555		Rev.
			6 PR, 12 IMLA, 1.8MM PITCH, 21.6MM							A
			catalog no			-		CUSTOMER		sheet 1 of 3

REV F - 2006-04-17

1

2

3

4

A

B

C


D

A

B

C

D

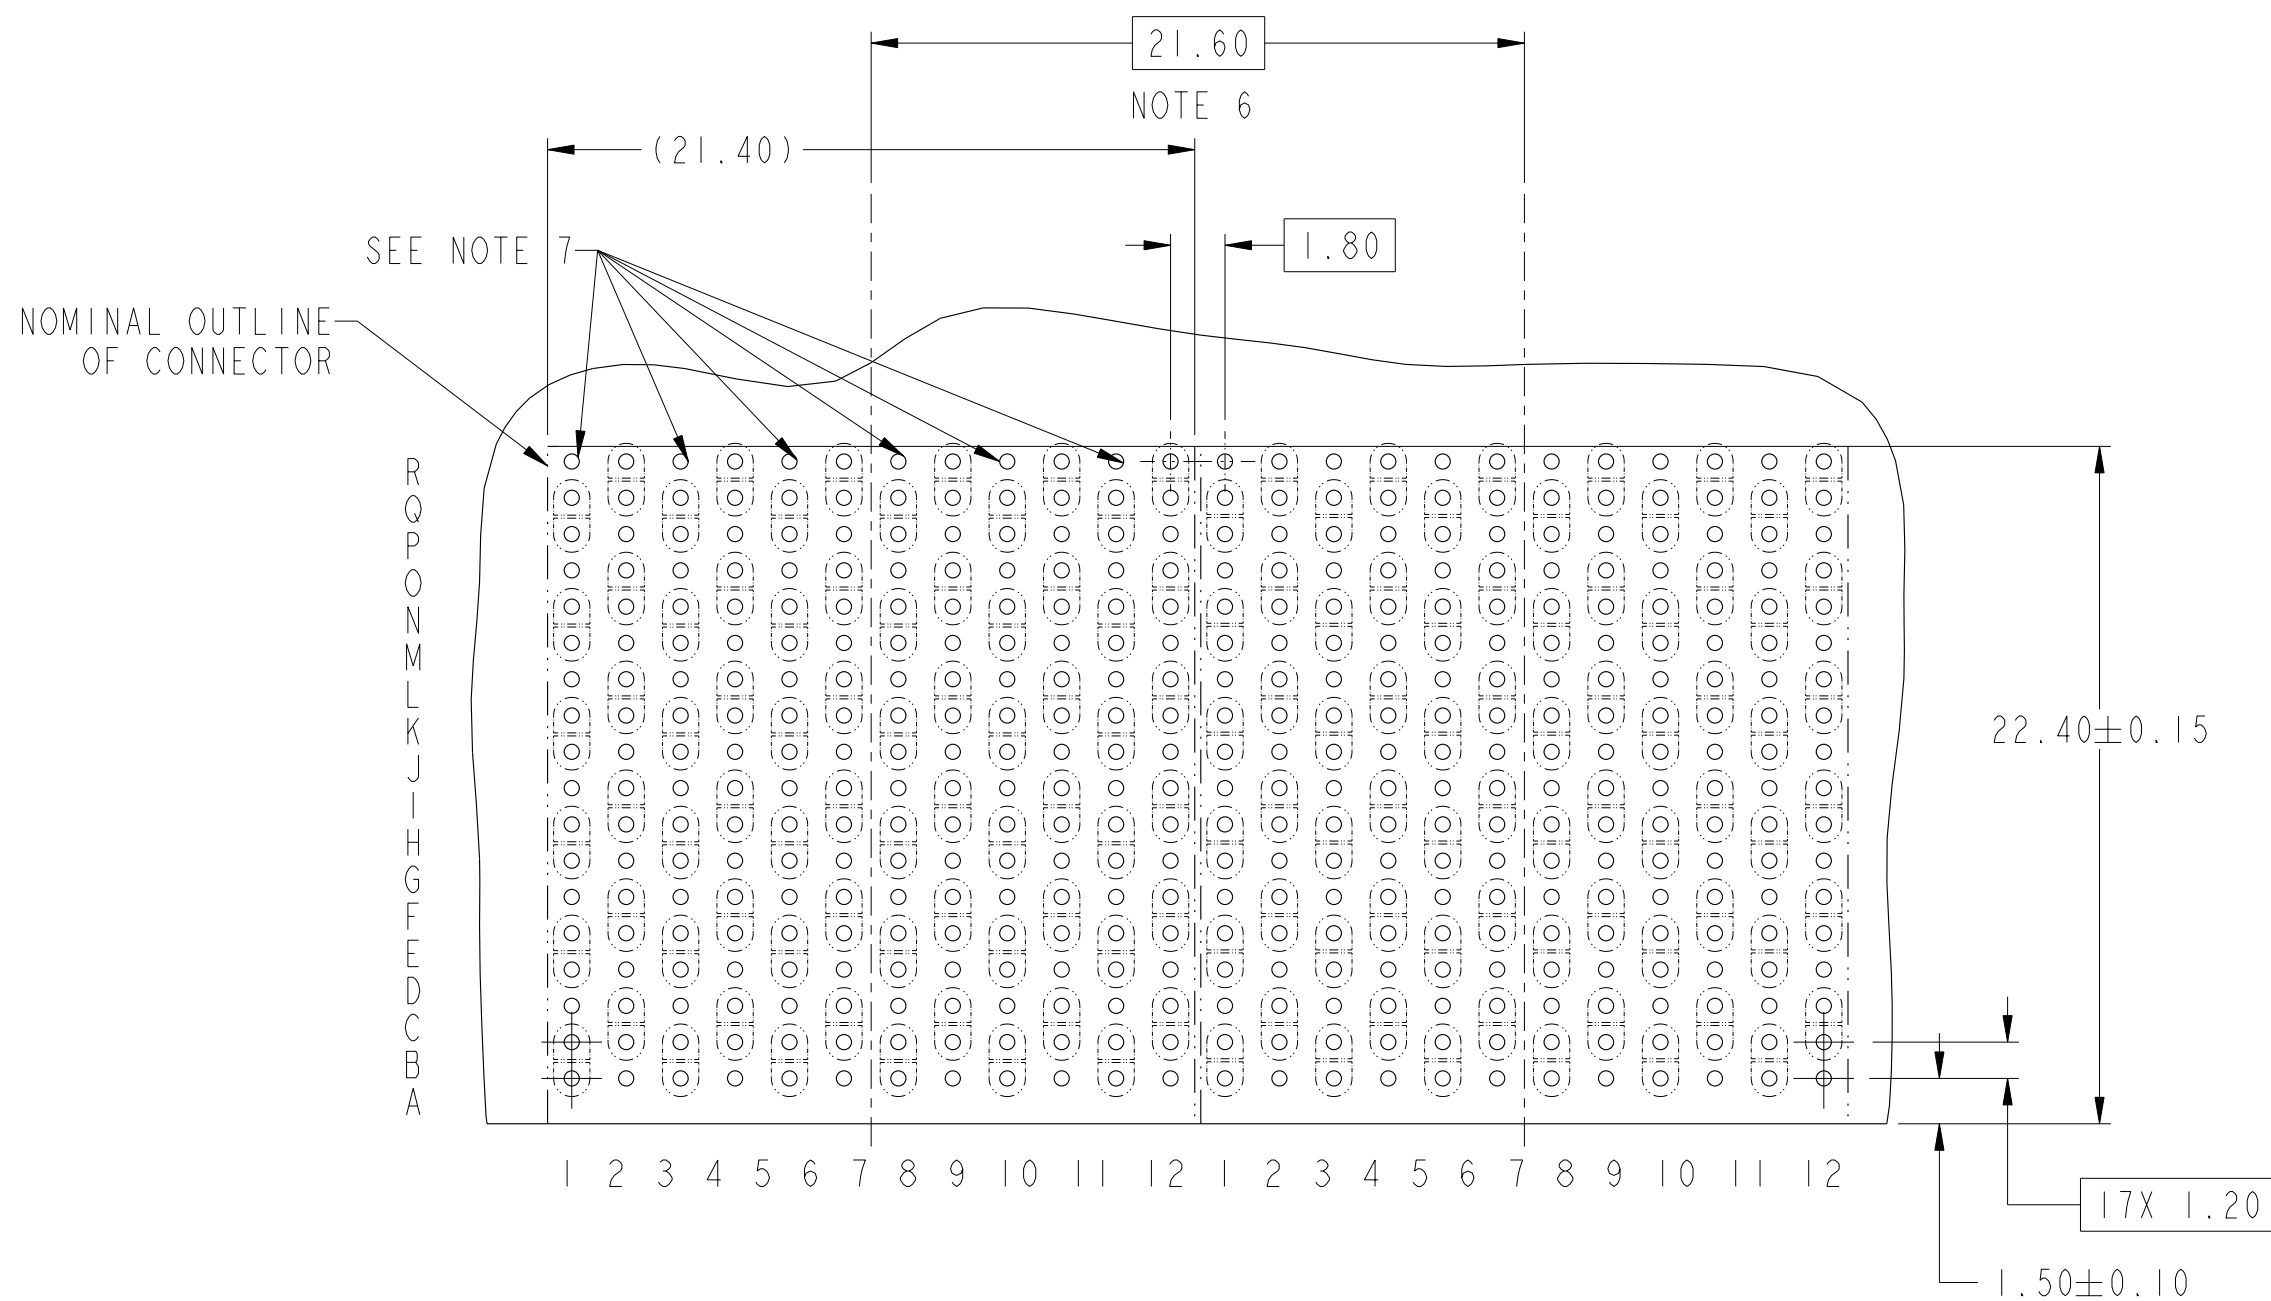

RECOMMENDED PCB LAYOUT  
 FOR DIFFERENTIAL APPLICATIONS  
 COMPONENT SIDE  
 (TWO ADJACENT FOOTPRINTS SHOWN)  
 NOTES 6, 7, & 8



Copyright FCI.

	Title ZipLine R/A HEADER ASSY 6 PR, 12 IMLA, 1.8MM PITCH, 21.6MM	dwg no 10077555	Rev. A
	catalog no -	CUSTOMER	sheet 2 of 3

REV F - 2006-04-17

1

2

3

PDM: Rev:A

STATUS: Released

Printed: Dec 01, 2010

PRODUCT NUMBER	PRESS-FIT TAIL PLATING TYPE
10077555-101	TIN/LEAD ALLOY OVER NICKEL
10077555-101LF	TIN OVER NICKEL (LEAD FREE)

- ① - CONNECTOR MATERIALS:  
HOUSING: HIGH TEMP THERMOPLASTIC, BLACK, UL94-V0  
IMLA PLASTIC: HIGH TEMP THERMOPLASTIC, BLACK, UL94-V0  
CONTACT: COPPER ALLOY  
ORGANIZER: STAINLESS STEEL
- 2 - CONTACT PLATING:  
SEPARABLE INTERFACE:  
PERFORMANCE-BASED PLATING, QUALIFIED TO MEET THE REQUIREMENTS OF FCI PRODUCT SPECIFICATION GS-12-452 INCLUDING TELCORDIA GR-1217-CORE (NOVEMBER 1995) CENTRAL OFFICE TEST SEQUENCE
- PRESS-FIT TAILS: SEE TABLE
- 3 - PRODUCT SPECIFICATION: GS-12-452
- 4 - APPLICATION SPECIFICATION: GS-20-094
- ⑤ - PRODUCT MARKING, (PART NUMBER & LOT CODE), ON THIS SURFACE.
- ⑥ - THE MINIMUM CENTERLINE SPACING BETWEEN ADJACENT MODULES IS 21.6MM.
- ⑦ - THERE IS NO GROUND BUSSING WITHIN THE CONNECTOR EXCEPT FOR POSITIONS R1, R3, R5, R7, R9, & R11. THESE MUST BE ASSIGNED AS GROUNDS.

- ⑧ - REFER TO CUSTOMER DRAWING 10045979 FOR INFORMATION ON PCB HOLE DIAMETERS AND PLATING OPTIONS
- 9 - LEAD FREE PRODUCT MEETS THE EUROPEAN UNION DIRECTIVES & OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008
- 10 - THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 40 SECONDS IN A CONVECTION, INFRA-RED, OR VAPOR PHASE REFLOW OVEN.
- 11 - PACKAGING MEETS GS-14-920 LEAD FREE LABELING SPECIFICATION.



Copyright FCI.

	title ZipLine R/A HEADER ASSY 6 PR, 12 IMLA, 1.8MM PITCH, 21.6MM	dwg no 10077555	Rev. A
	catalog no -	CUSTOMER	sheet 3 of 3