

1602660

https://www.phoenixcontact.com/us/products/1602660

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



M23, Device connector front mounting, series: RC, straight, shielded: yes, Screw locking mechanism, No. of pos.: 16+3, Direction of rotation: Standard, contact connection type: Pin, Solder cup, Radial O-ring, $4x \varnothing 3.2$, coding: N, Alternative product in accordance with RoHS II without Exemption 6c (Pb <0.1%) item no.: 1241502

Commercial data

Item number	1602660
Packing unit	1 pc
Minimum order quantity	1 pc
Note	Made to order (non-returnable)
Sales key	AB31
Product key	ABRAFL
GTIN	4046356240857
Weight per piece (including packing)	44.1 g
Weight per piece (excluding packing)	44.1 g
Customs tariff number	85366990
Country of origin	DE



1602660

https://www.phoenixcontact.com/us/products/1602660

Technical data

Product properties

Pg screw connection

Thread type

Degree of protection (plugged in)

oduct properties	
Product type	Circular connectors (device side)
onnector	
Silicolo!	
Insulating body	
Coding	N
Insertion/withdrawal cycles	100
Connection method	Solder cup
Contact switching type	Pin
Application	Signal
Number of positions	19
Direction of rotation	Standard
Connection profile	16+3
Contact diameter Power contacts	1.5 mm
Litz wire cross-section Power contacts min.	0.08 mm²
Litz wire cross-section Power contacts max.	1 mm²
Rated current Power contacts	10 A
Rated voltage	48 V AC
	74 V DC
Rated surge voltage	1.5 kV
Overvoltage category	III
Degree of pollution	3
Contact diameter Signal contacts	1 mm
Litz wire cross-section Signal contacts min.	0.08 mm²
Litz wire cross-section Signal contacts max.	1 mm²
Nominal current per signal contact	8 A
Housing	
Housing material	Metal
Type of locking	Screw locking mechanism

none

IP67

M23




1602660

https://www.phoenixcontact.com/us/products/1602660

Drawings

Schematic diagram

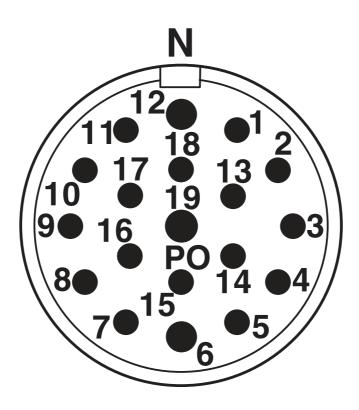



1602660

https://www.phoenixcontact.com/us/products/1602660

Classifications

UNSPSC 21.0

ECLASS

ECLASS-11.0	27440102
ECLASS-12.0	27440116
ECLASS-13.0	27440116
ETIM	
ETIM 8.0	EC002635
UNSPSC	

39121400



1602660

https://www.phoenixcontact.com/us/products/1602660

Environmental product compliance

REACh SVHC	Lead 7439-92-1
China RoHS	Environmentally Friendly Use Period = 50 years
	For information on hazardous substances, refer to the manufacturer's declaration available under "Downloads"

Phoenix Contact 2023 © - all rights reserved https://www.phoenixcontact.com

Phoenix Contact USA 586 Fulling Mill Road Middletown, PA 17057, United States (+717) 944-1300 info@phoenixcon.com