

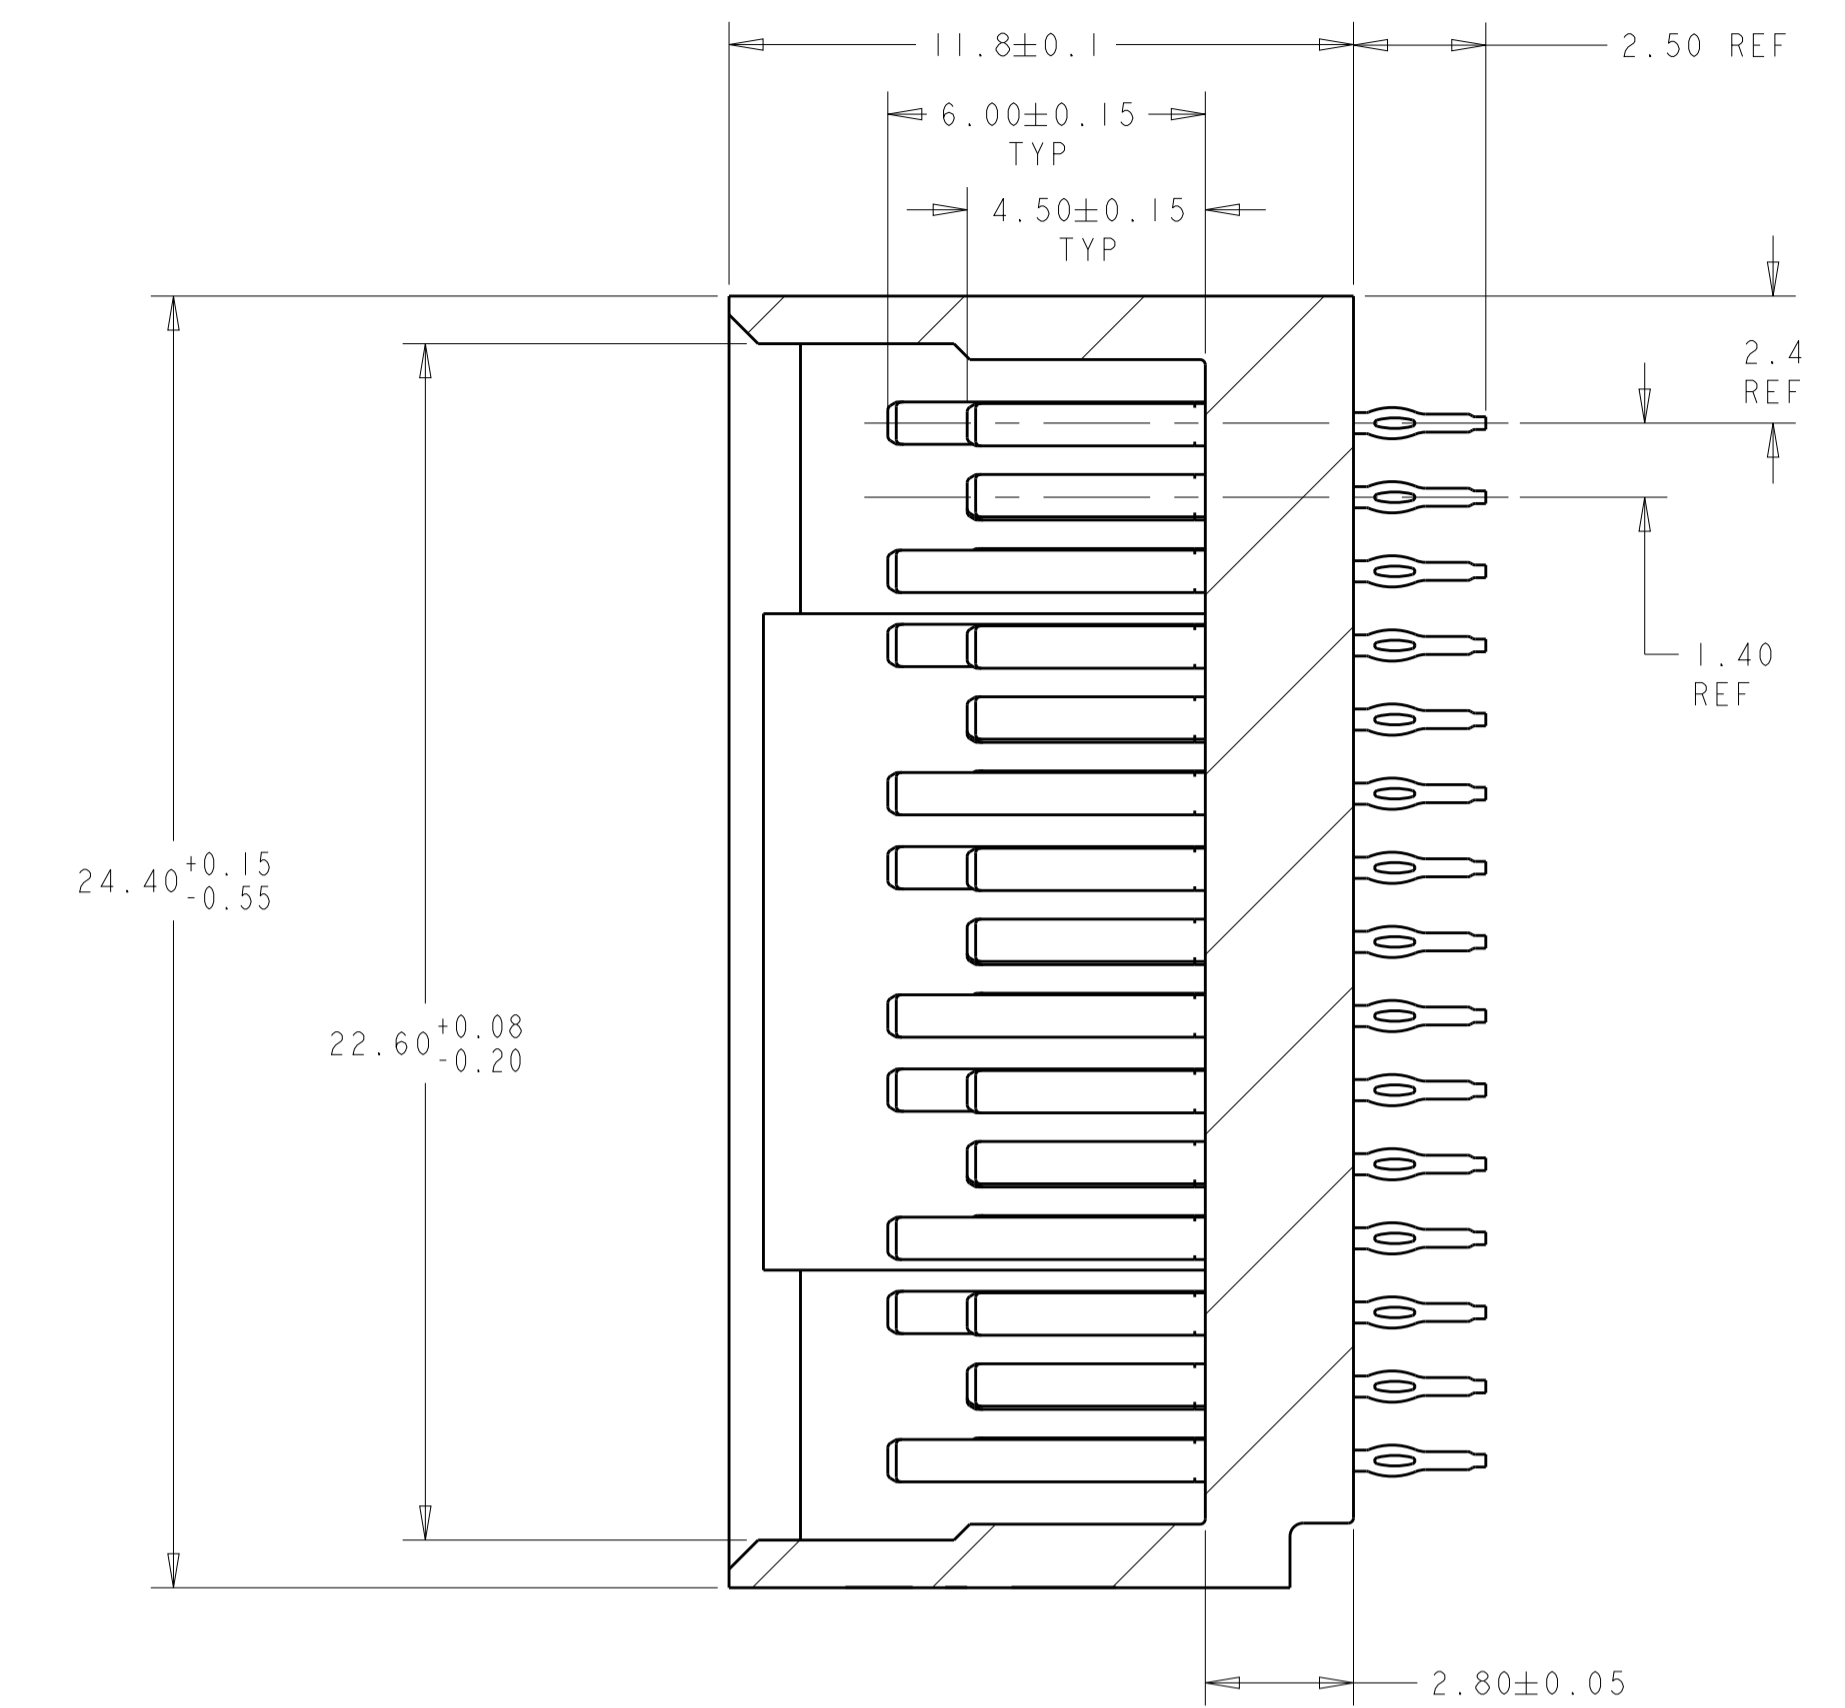
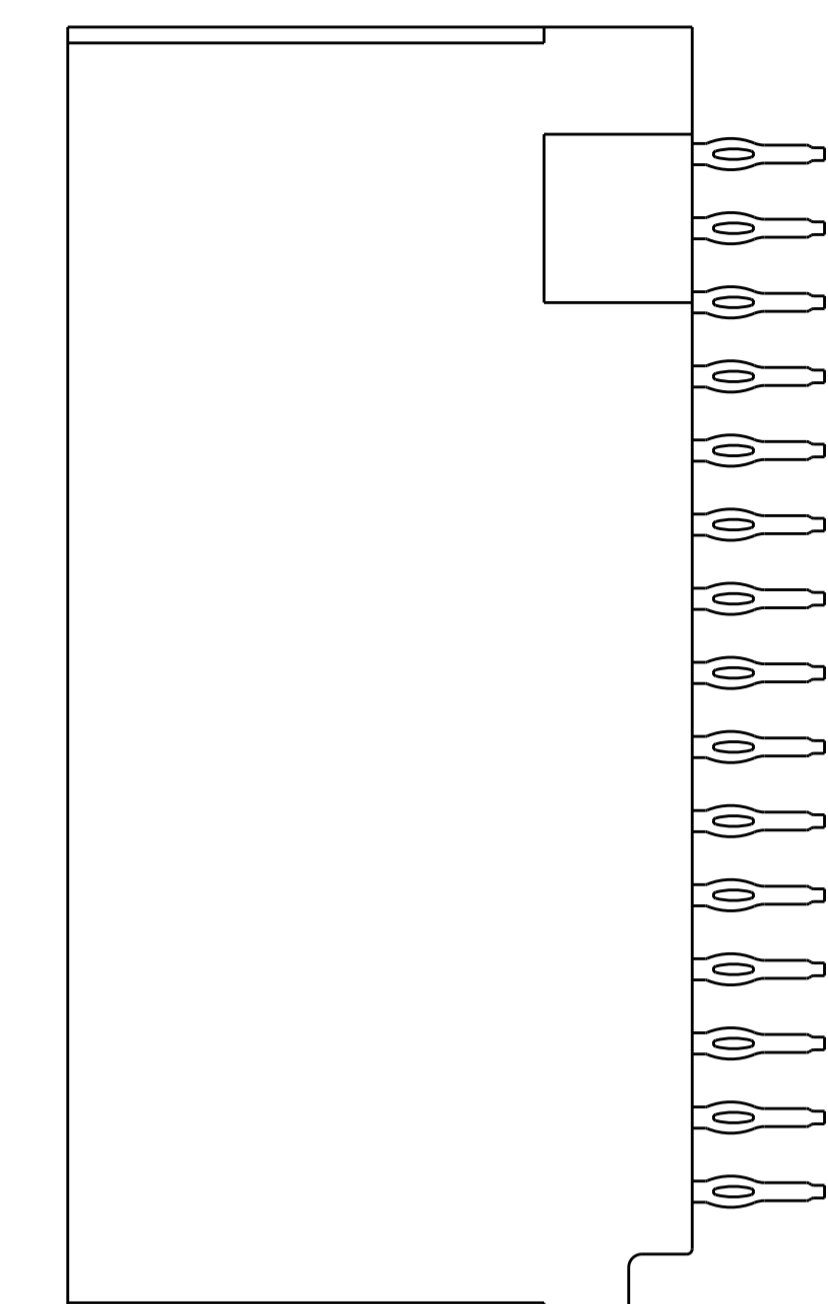


LOC		DIST		REVISIONS				
P	LTN	DESCRIPTION	DATE	DWN	APVD			
B		REVISED PER ECO-13-002771	20MAR2013	KH	RP			
C		REVISED PER ECO-19-009248	09JUL2019	AP	SY			

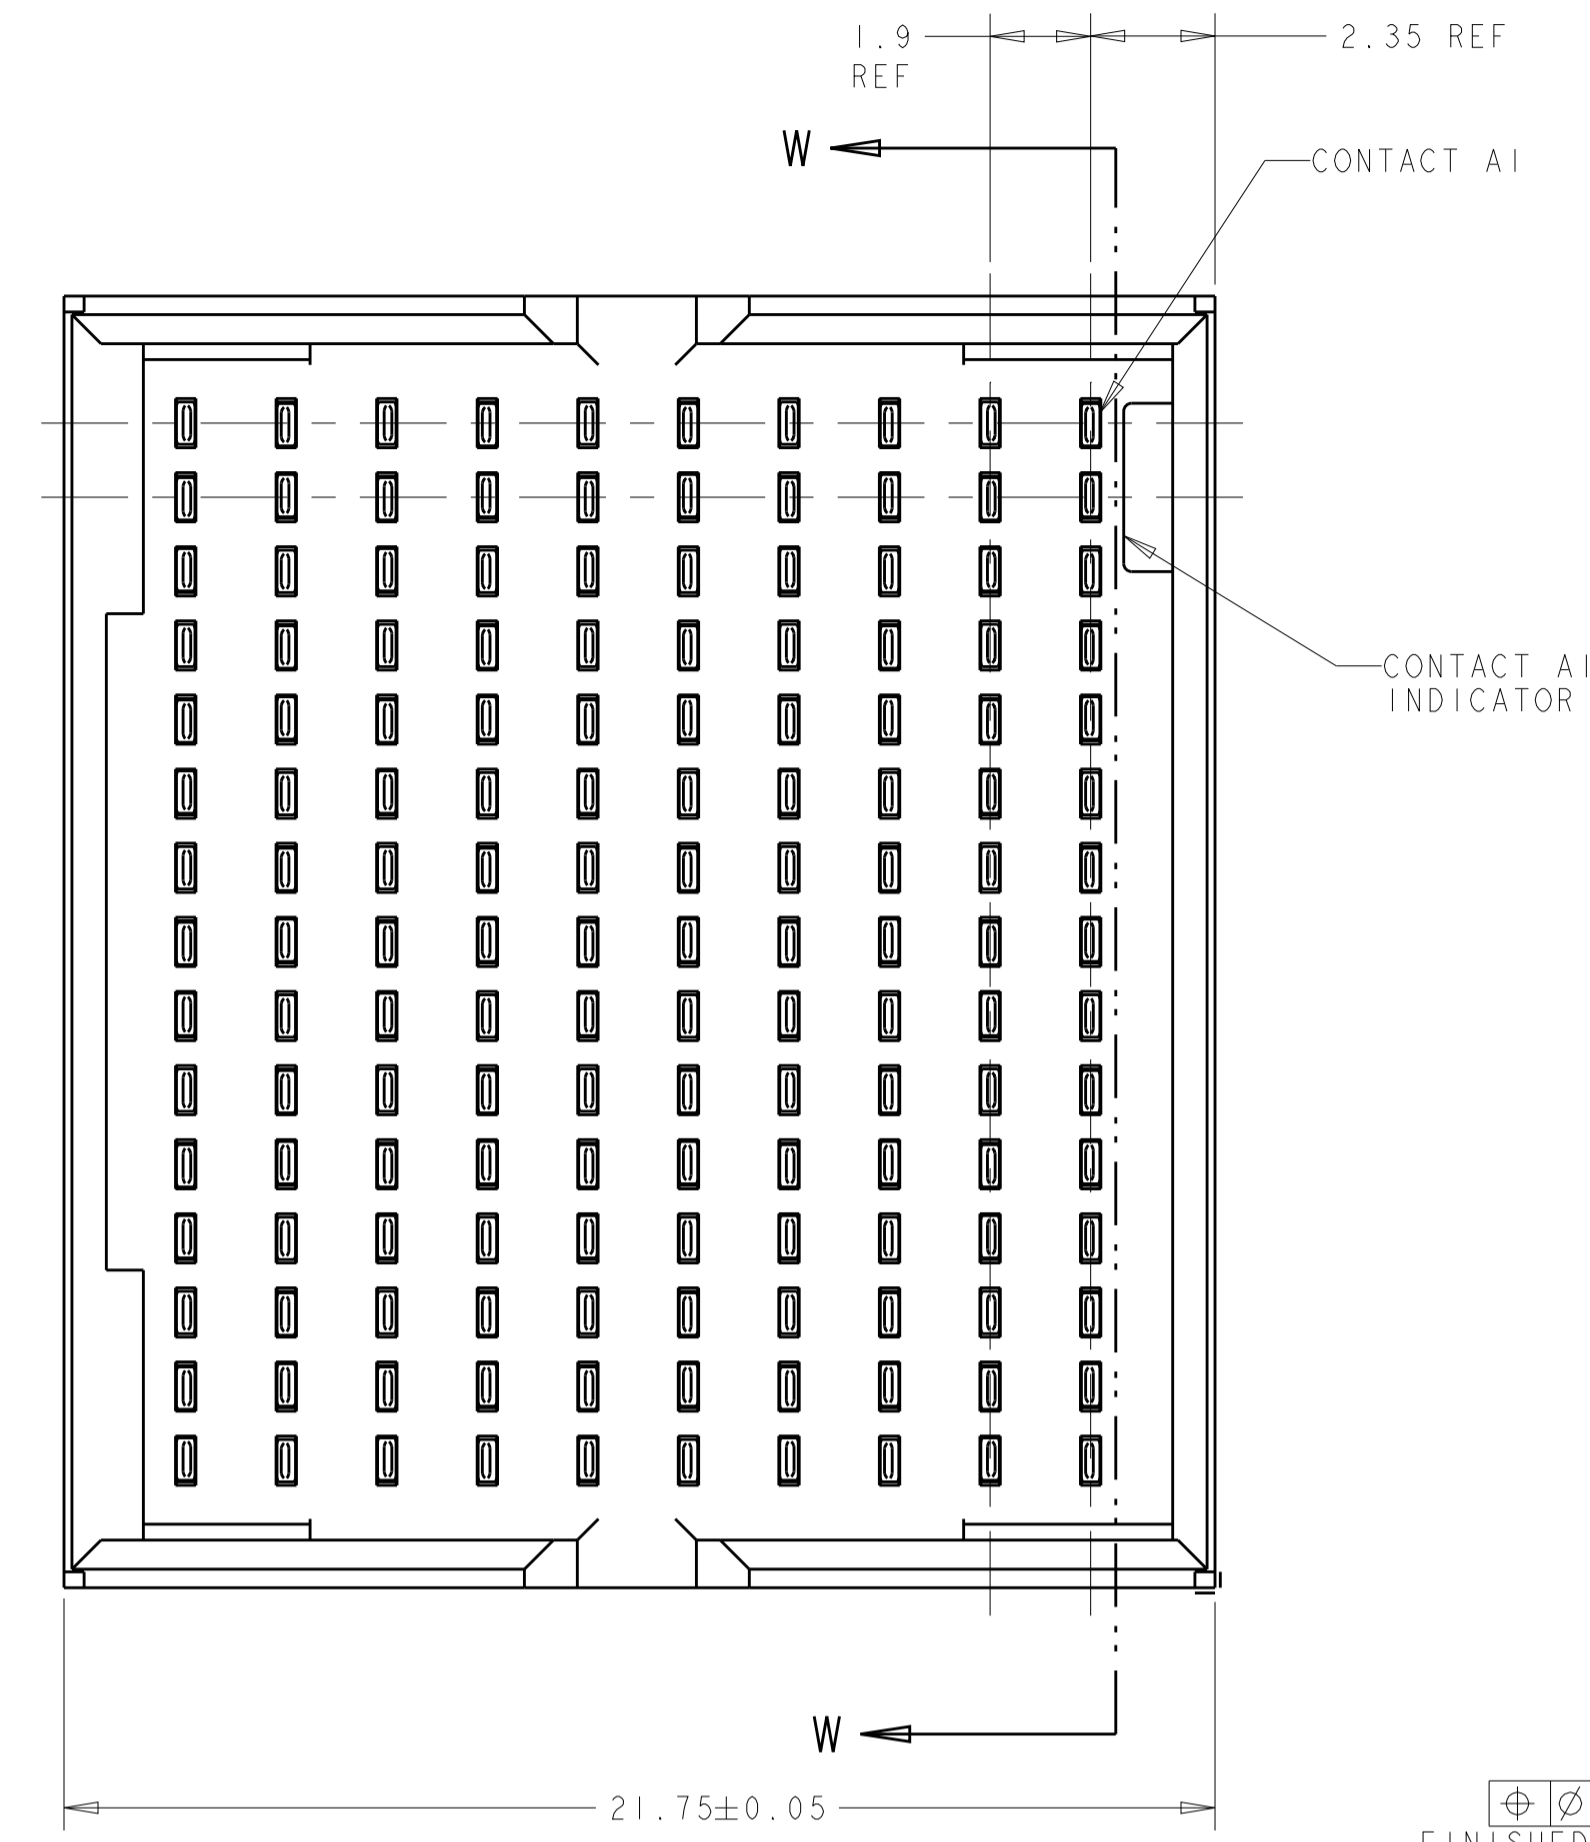

SECTION W-W

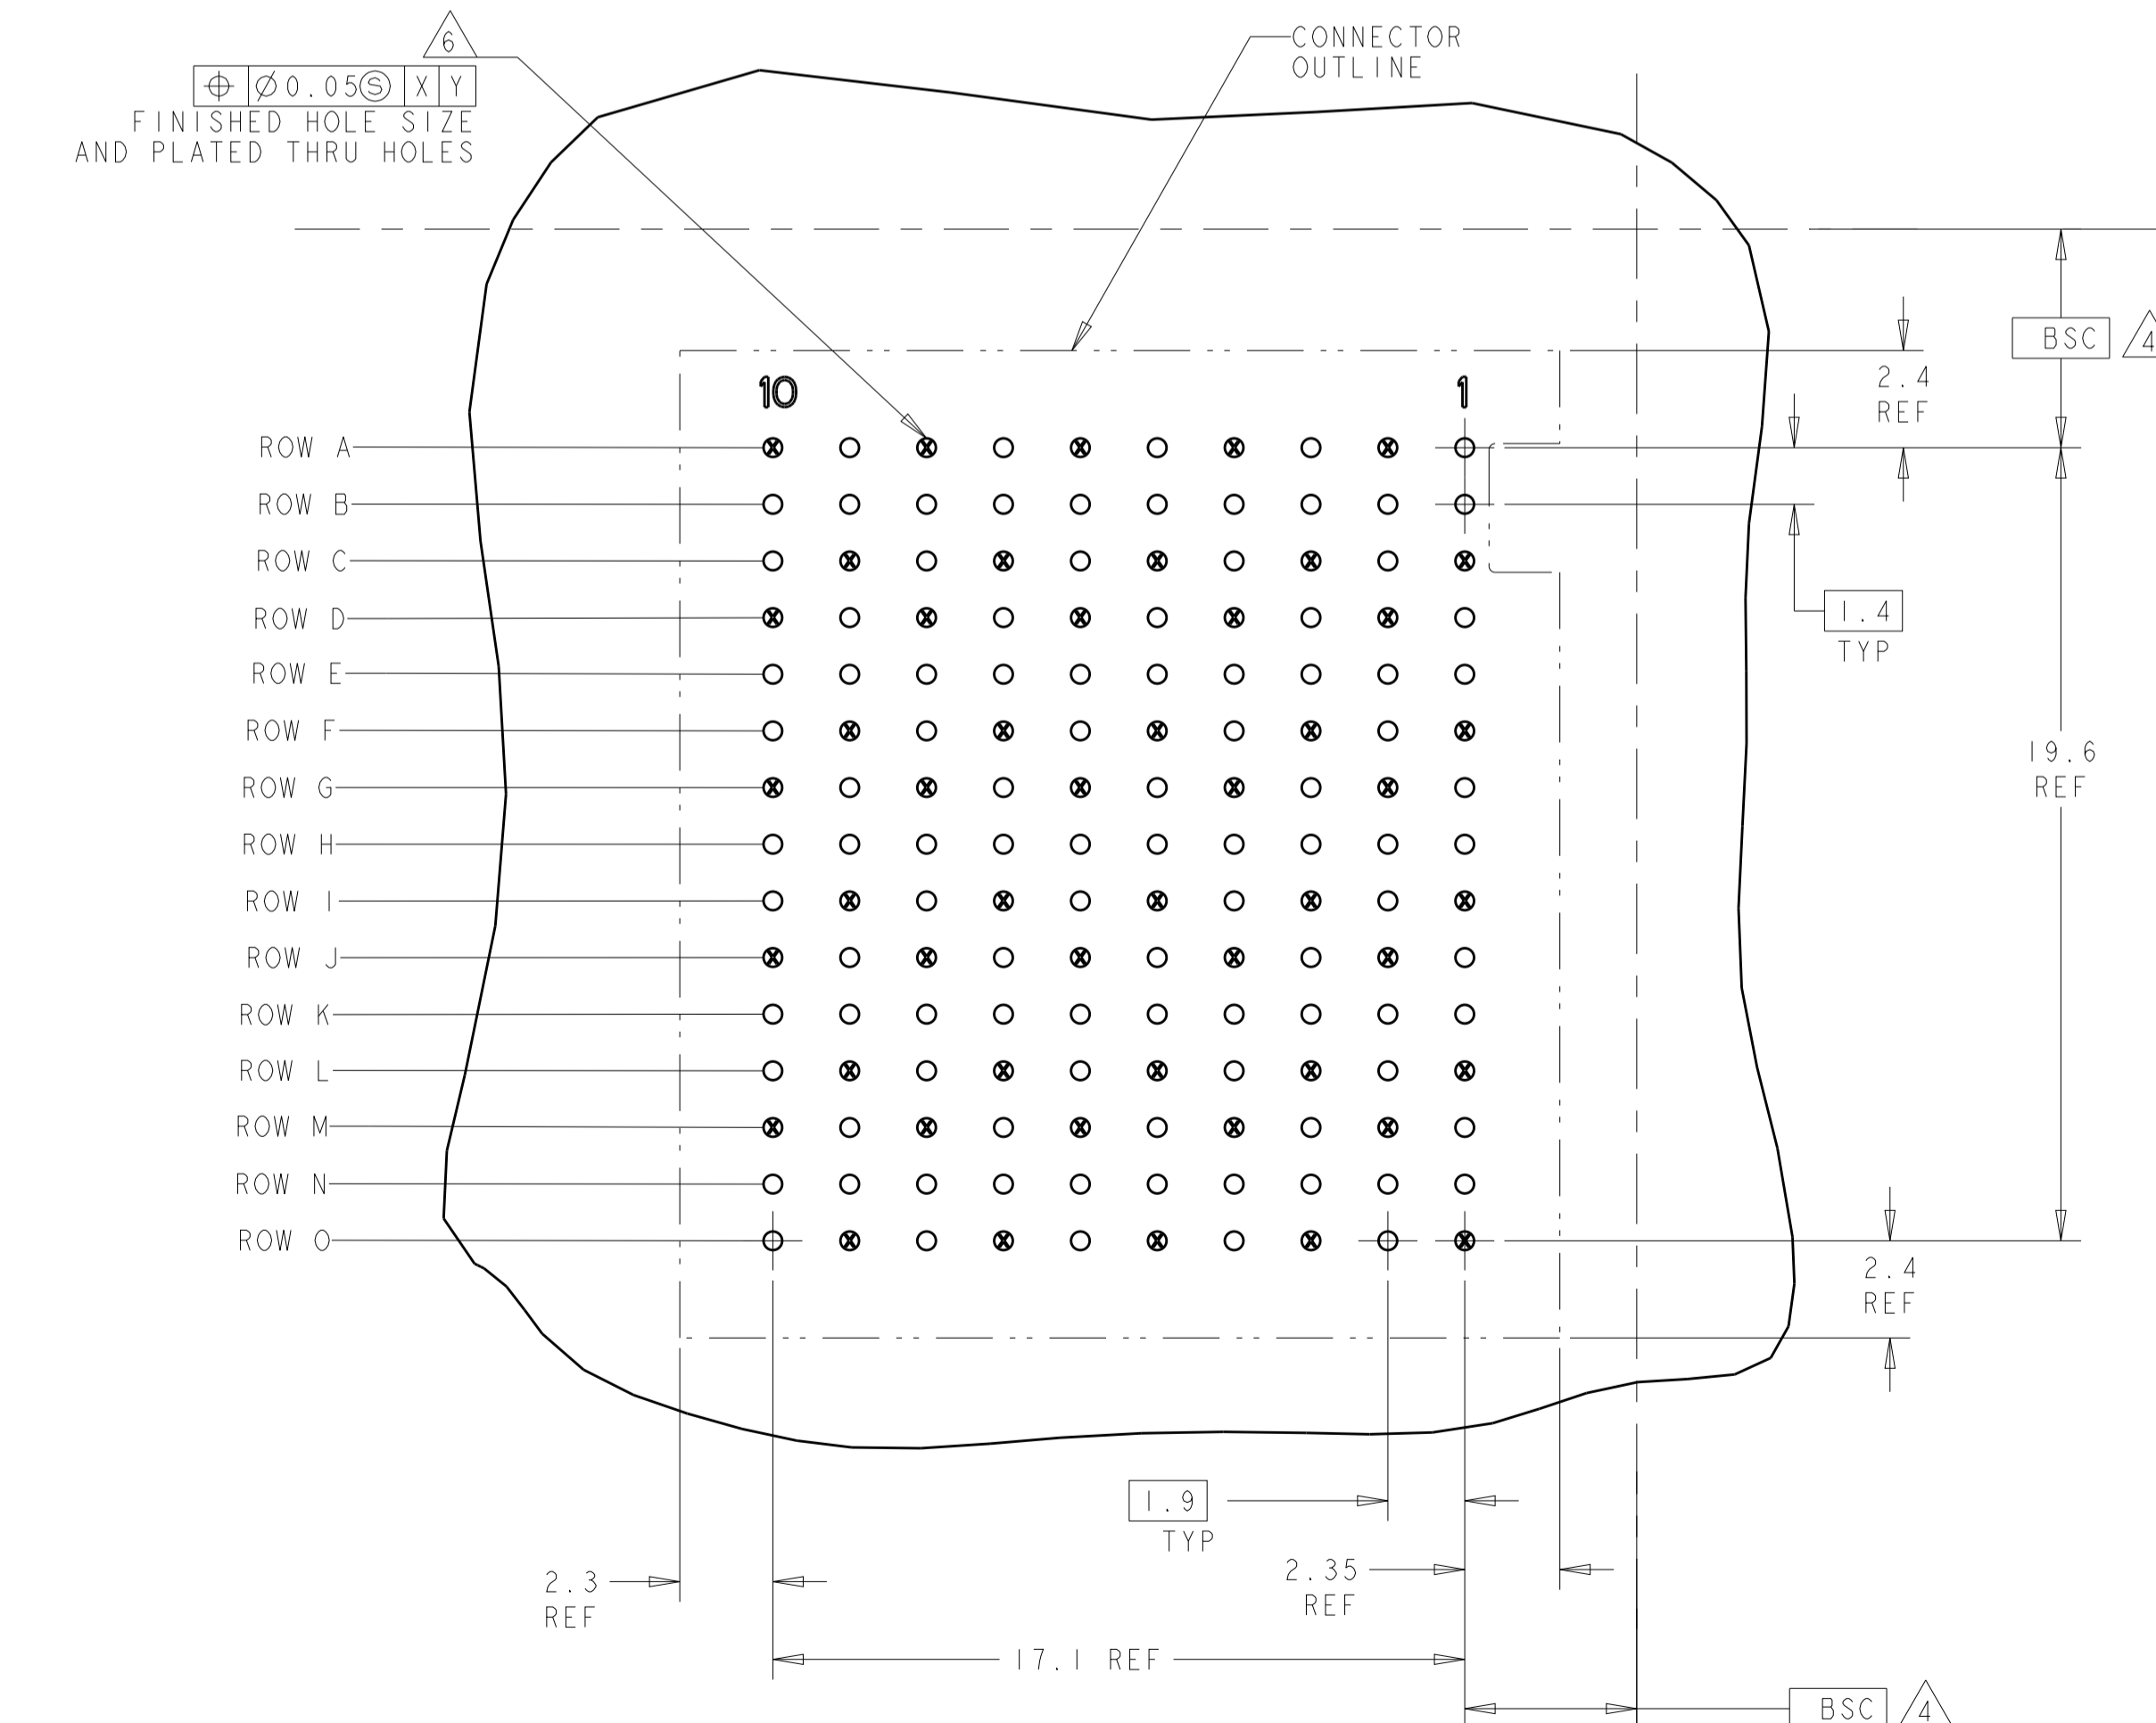

○ = SIGNAL  
 ⊗ = GROUND

RECOMMENDED PC BOARD LAYOUT BACKPLANE, COMPONENT SIDE SHOWN  
 SCALE 6:1

- 1 MATERIAL:  
CONTACT - PHOS BRONZE  
HOUSING - LCP, UL 94V-0, COLOR - BLACK
- 2 FINISH:  
CONFORMS TO THE REQUIREMENTS OF  
TE PRODUCT SPECIFICATION 108-2303-1; BASED  
ON TELECORDIA GR-1217-CORE FOR SYSTEM  
QUALITY LEVEL III, APPLICATIONS IN  
CONTROLLED ENVIRONMENTS (CENTRAL OFFICE).  
COMPLIANT PIN AREA- 0.5µm MIN MATTE TIN OVER 1.27µm MIN NICKEL.
- 3 CONNECTOR MARKED WITH PART NUMBER, DATE CODE,  
85 OHM, AND STANDARD IN APPROXIMATE AREA SHOWN
- 4 DATUMS AND BASIC DIMENSIONS ESTABLISHED BY  
CUSTOMER.
- 5 CONTACT AREA LUBRICATED WITH BELLCORE  
APPROVED LUBRICANT. TECHNICAL REFERENCE  
GR-1217-CORE, ISSUE 1, NOVEMBER 1995.
- 6 REFERENCE APPLICATION SPEC FOR RECOMMENDED PLATED THRU  
HOLE DIAMETER AND PLATING THICKNESS.
- 7 SHOWN LOGO OR OTHER TE OWNED LOGOS IN APPROXIAMATE AREA.

2065025-1  
 PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	J. K. SHOBER	11JUN2008	TE Connectivity
DIMENSIONS:		CHK	C. RITTER	11JUN2008	
mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD			NAME
0 PLC	±	PRODUCT SPEC	108-2303-1		HEADER ASSEMBLY, DOUBLE ENDED
1 PLC	±	APPLICATION SPEC	114-13243		5 PAIR, 10 COLUMN
2 PLC	±	WEIGHT	-		TinMan 85 OHM
3 PLC	±	CUSTOMER DRAWING	A100779		SCALE 7:1 SHEET 1 OF 1 REV C
4 PLC	±				
5 PLC	±				
6 PLC	±				
7 PLC	±				
8 PLC	±				
9 PLC	±				
10 PLC	±				