


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

5

PART NUMBER	MATERIAL	HEIGHT "A" +/- .031	IMPRINT AREA "B" +/- .031	VERTICAL REPEAT "C" +/- .031	LABELS PER ROW	STANDARD PKG. QTY.
S075X075VATY	GMV16 OR GMV17	0.75 [ 19.0 ]	0.25 [ 6.35 ]	1.00 [ 25.4 ]	5	5000
S075X100VATY		1.00 [ 25.4 ]	0.38 [ 9.53 ]	1.25 [ 31.8 ]		
S075X125VATY		1.25 [ 31.8 ]		1.50 [ 38.1 ]		
S075X150VATY		1.50 [ 38.1 ]	0.50 [ 12.7 ]	1.75 [ 44.45 ]		

NOTES:  
1. MILLIMETERS ARE IN [ ].

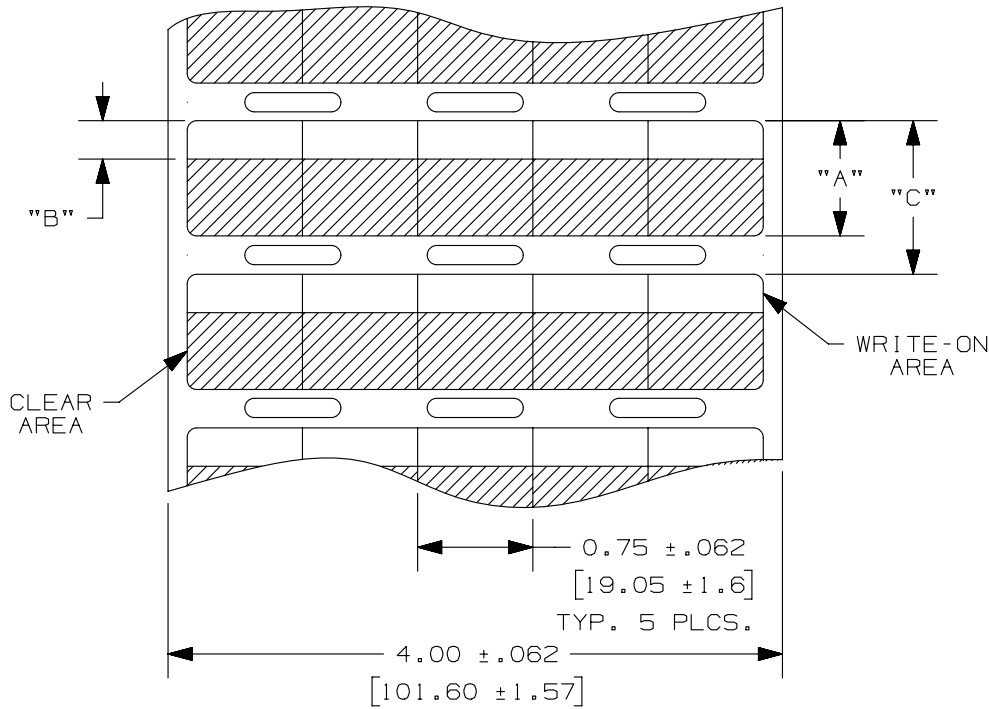

B

B

A

A

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
5	8/26/13	RVU	SEWH	MSAD	REMOVE PN: S075X125TAT.	GAECN01161
4	9/6/11	RVU		MSAD	ADD S075X100VATY ON TABLE.	6503

TITLE <b>S075X***VATY OPTIMUM SELF-LAMINATING THERMAL TRANSFER PRINTABLE LABELS CUSTOMER DRAWING</b>	
ITEM REVISION NAME 100472JY/07	<b>PANDUIT</b>
DATASET FILE NAME 100472JY-DC-C10466/07G	
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [ mm ]	
.x ± .12 [ 3.04 ] .xxx ± .025 [ .635 ] .xx ± .062 [ 1.57 ] ANGLES ±	
THIRD ANGLE PROJECTION	
DRAWN BY RVU	DATE 8/31/06
CHK MSAD	SCALE NTS
DRAWING NUMBER: C10466	
SHT 1 OF 1	
SIZE A	

D10100DA/16