


NOTES: UNLESS OTHERWISE SPECIFIED

- P/N: XELCOLOR  
HOUSING & PLUNGER & SLIDE: MOLDED NYLON. AVAILABLE IN TEN COLORS.  
CONTACT NEEDLE & SPRING: STAINLESS STEEL.  
BANANA SOCKET: BRASS  
SET SCREW: ALLOY STEEL
- P/N: 9302COLOR  
HOUSING: MOLDED NYLON. AVAILABLE IN ALL TEN COLORS.  
FRAME: NICKEL PLATED BRASS.  
CONTACT: NICKEL PLATED BeCu OR PHOSPHOR BRONZE.  
HARDWARE: NATURAL NYLON NUT COVER. STAINLESS STEEL NUT.  
BRASS EYELET. COPPER, TIN PLATED. TERMINAL RING.
- P/N: W-600/COLOR  
18AWG 65X36 TINNED COPPER  
0.144 [3.66] O.D. PVC INSULATION  
AVAILABLE IN TEN COLORS.
- PERFORMANCE  
MAXIMUM CURRENT: 4.0 AMPS  
MAXIMUM VOLTAGE: 5000 W.V.D.C.  
MAXIMUM TEMPERATURE: 221°F (105°C)

REVISIONS		DATE	APPROVED
LTR	DESCRIPTION		

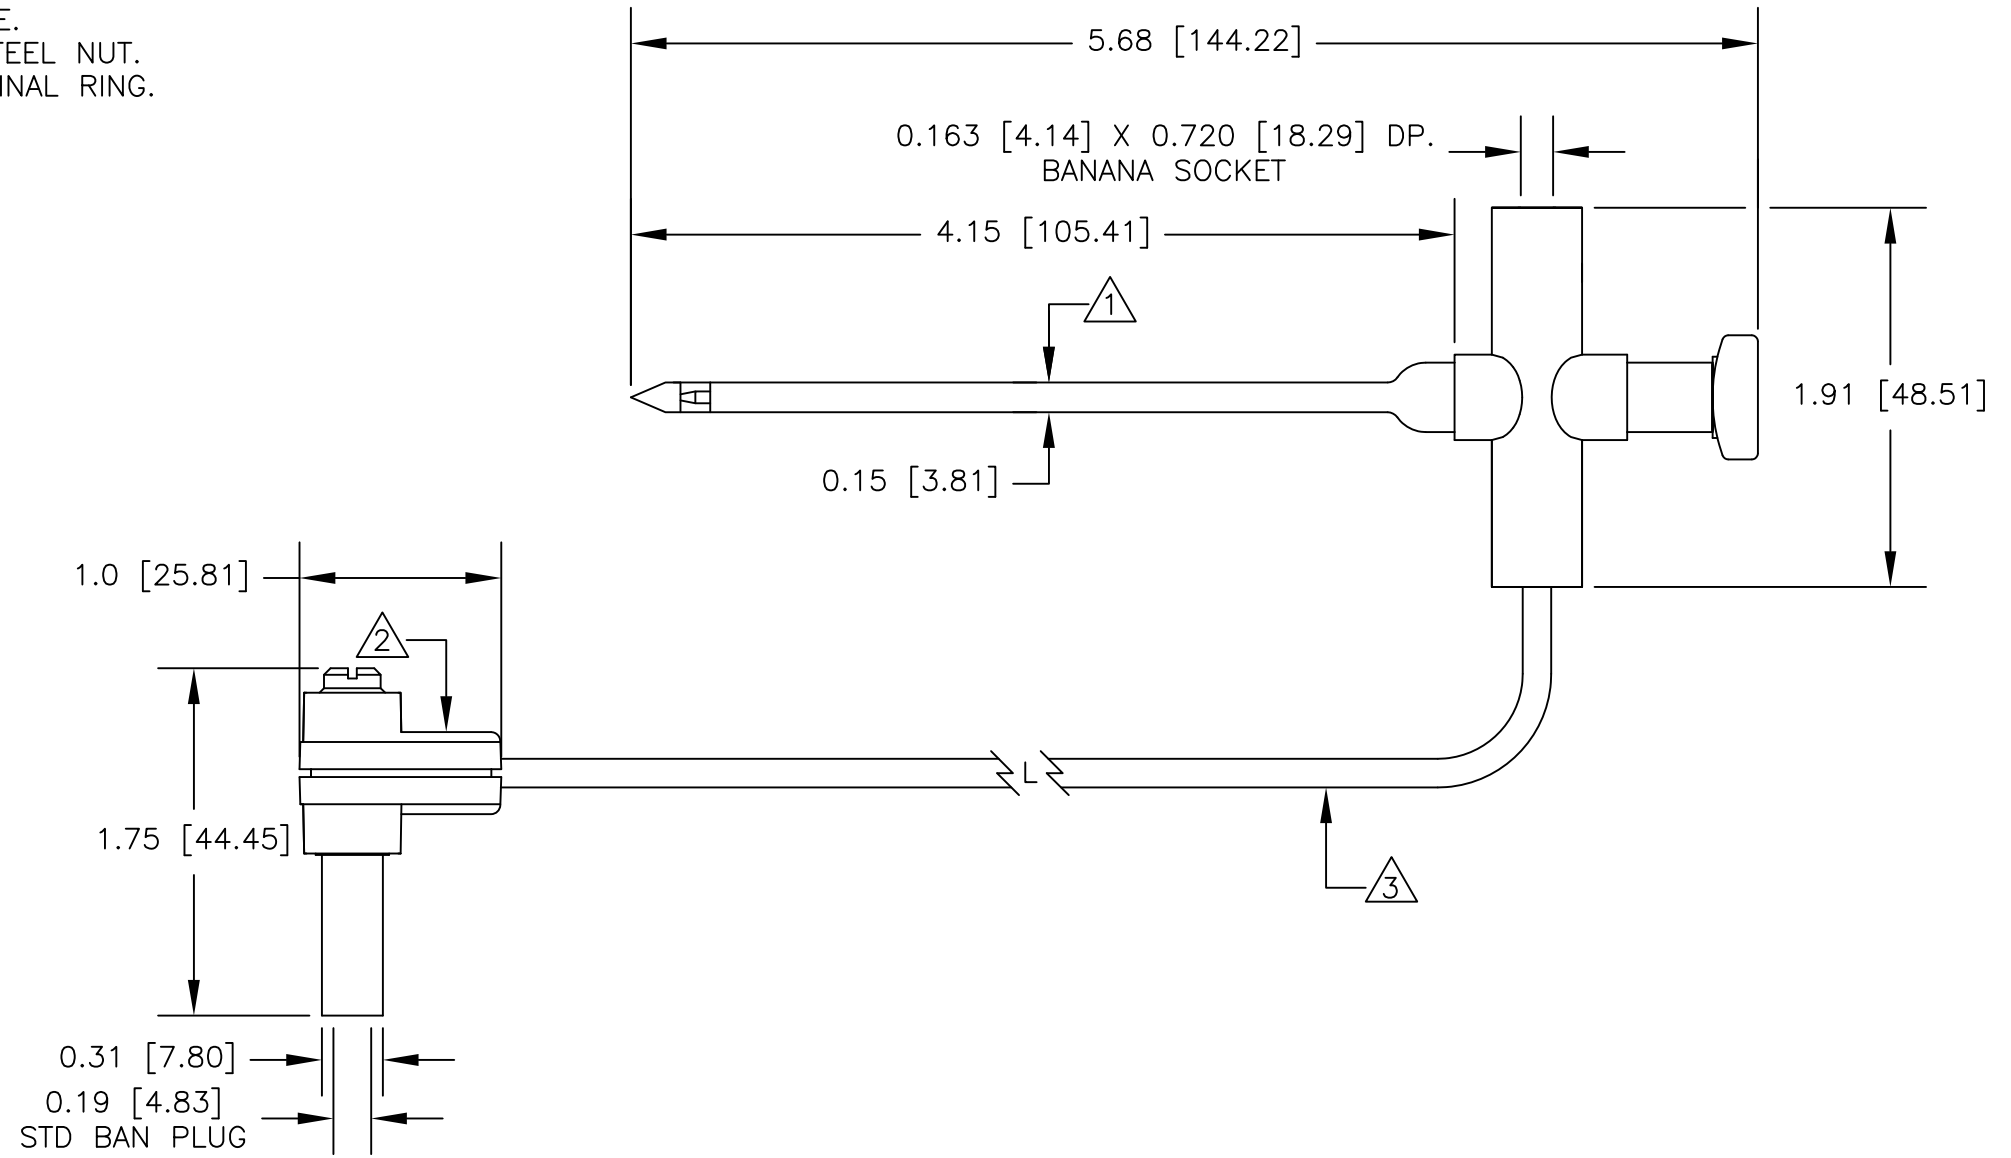

		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES ± .XX ± ± .XXX ±	CONTRACT NO.		<b>E-Z-HOOK</b> DIVISION OF TEKTEST INC. ARCADIA, CA 91006 U.S.A.
			APPROVALS	DATE	
		MATERIAL SEE NOTE.	DRAWN R.L	8/16	DESCRIPTION INSULATION PIERCING MACRO-HOOK (XEL) TO SHRD R/A STD BAN PLUG (9302)
		FINISH SEE NOTE.	APPROVED BY		SIZE CODE IDENT NO. DRAWING NO. REV. <b>B 08505 633XEL</b>
NEXT ASSY	USED ON				SCALE 1:1 SHEET 1 OF 1
APPLICATION		DO NOT SCALE DRAWING			