
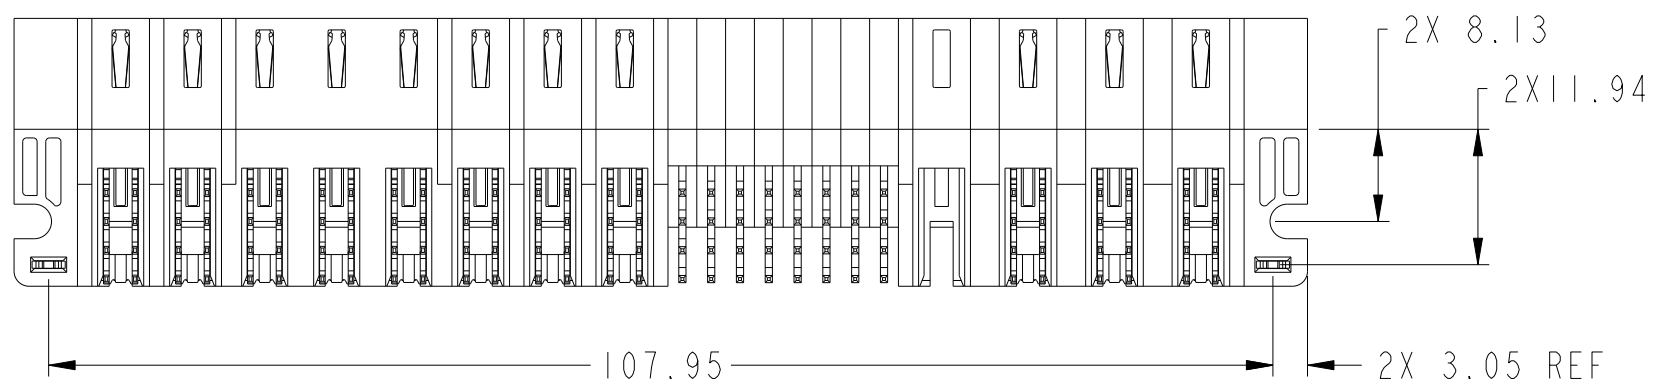
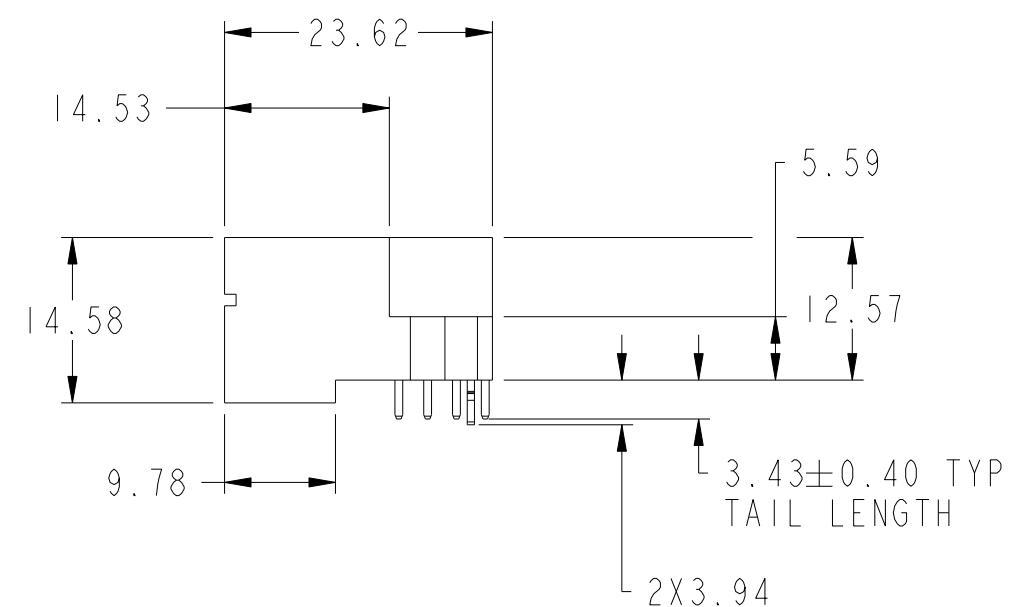
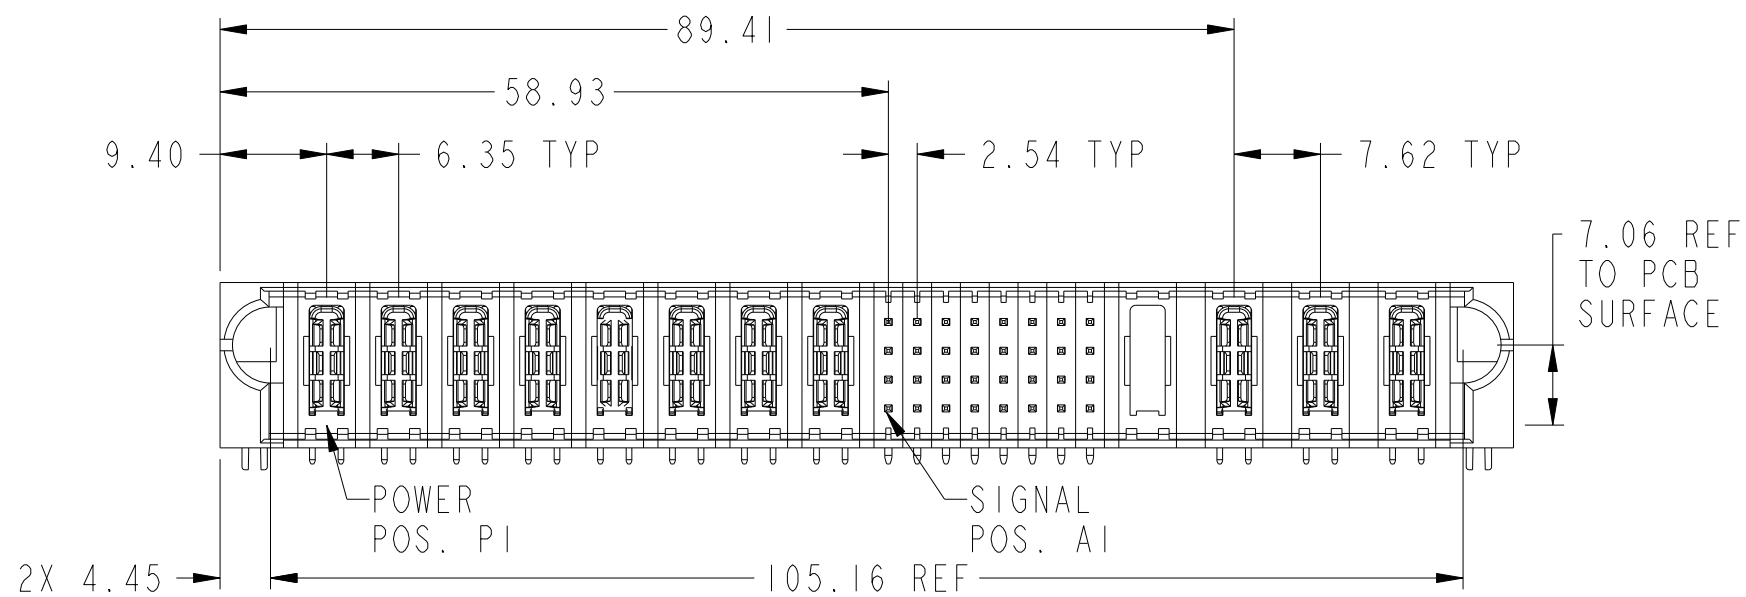


PRODUCT NUMBER SEE SHEET 2

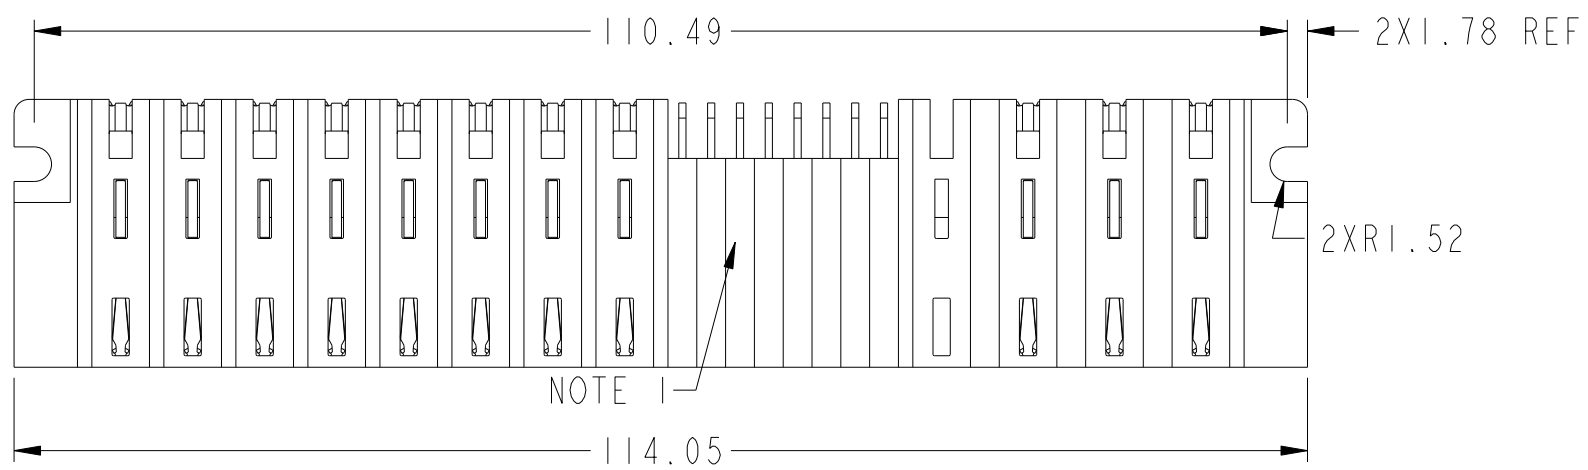


spec ref		dr	Sunny2 Liu	2017/06/23	projection 	MM ←→	size	A3	scale	3:2			
tolerance std		eng	Sunny2 Liu	2017/07/24			ecn no	-					
ISO 406 ISO 1101		chr	Fancy Zhang	2017/07/24			rel level	Released					
TOLERANCES UNLESS OTHERWISE SPECIFIED		appr	Pei-Ming Zheng	2017/07/24	product family		PwrBlade+		rev				
surface	linear	0.X		±0.5	Amphenol FCi	title		8HP + 32S + 4ACP		dwg no	10106262-C008005	rev	A
		0.XX		±0.25		RA STB PLUG							
ISO 1302		angular	0°			cat. no.	Product - Customer Drw		sheet 1 of 3				

Amphenol
FCi

© 2016 AFCI

PRODUCT NO.	ROWS	HIGH POWER								SIGNAL								HIGH POWER				E2
		E1	P1	P2	P3	P4	P5	P6	P7	P8	1	2	3	4	5	6	7	8	P9	P10	P11	
10106262-C008005LF	DCBA	HA	H1	H1	H1	H1	H1	H1	H1	UUUUUUUUUU	UUUUUUUUUU	UUUUUUUUUU	UUUUUUUUUU	UUUUUUUUUU	UUUUUUUUUU	UUUUUUUUUU	UUUUUUUUUU	X	H1	H1	H1	HA

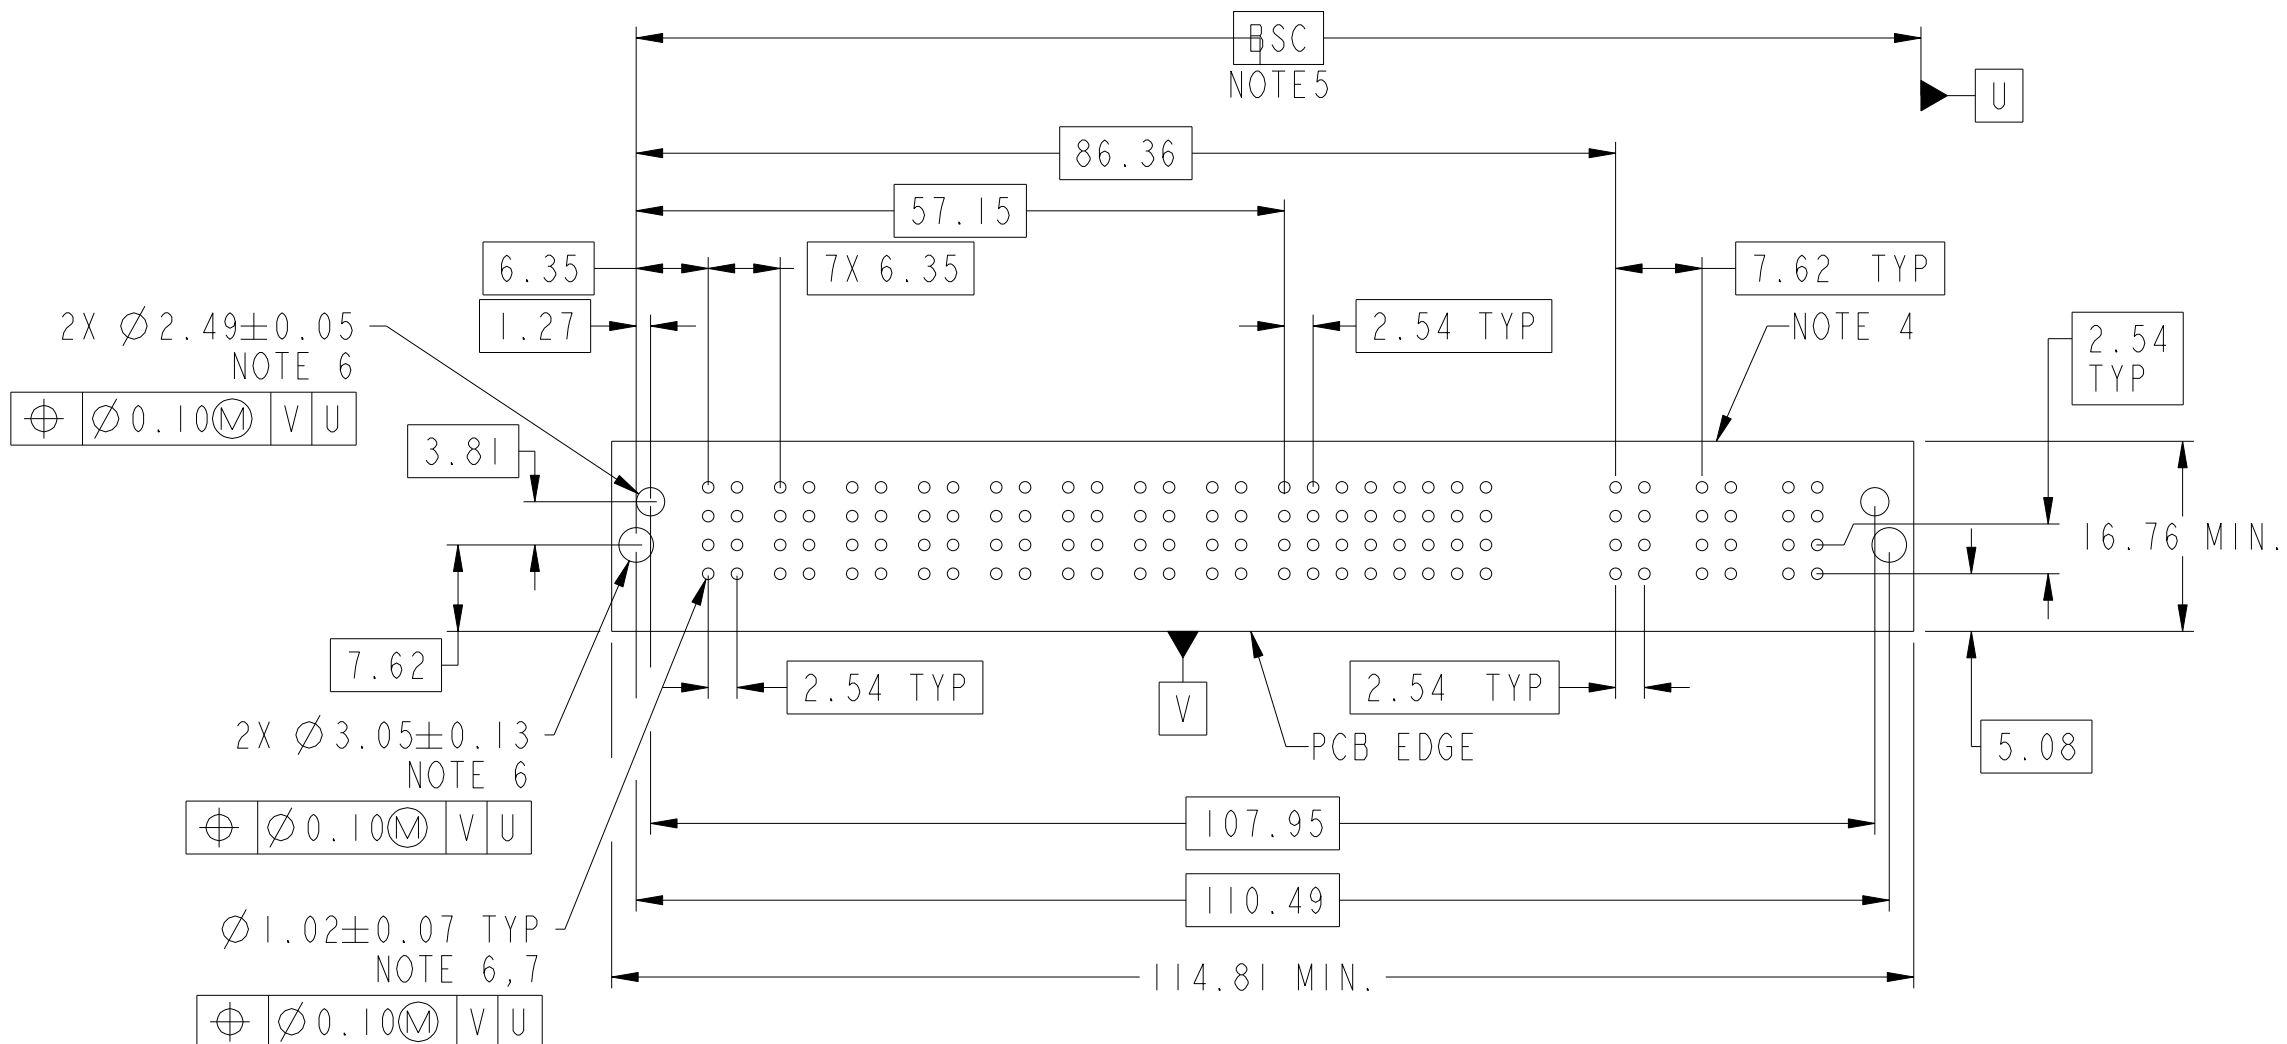

CODE	DESCRIPTION
G	MLBF SIGNAL CONTACT, ROW C (3.43)
H1	STD HIGH POWER CONTACT (3.43)
HA	METAL HOLD DOWN
R	STD SIGNAL CONTACT, ROW A (3.43)
S	STD SIGNAL CONTACT, ROW B (3.43)
T	STD SIGNAL CONTACT, ROW C (3.43)
U	STD SIGNAL CONTACT, ROW D (3.43)
X	OMITTED

spec ref	dr	Sunny2 Liu	2017/06/23
tolerance std	eng	Sunny2 Liu	2017/07/24
ISO 406	chr	Fancy Zhang	2017/07/24
ISO 1101	appr	Pei-Ming Zheng	2017/07/24
TOLERANCES UNLESS OTHERWISE SPECIFIED			
surface	linear	0.X	±0.5
		0.XX	±0.25
		0.XXX	±0.10
ISO 1302	angular	0°	±2°

projection	MM	size	A3	scale	3:2
product family	PwrBlade+	rel level	Released	ecn no	-
Amphenol FCI	8HP + 32S + 4ACP	RA STB PLUG	10106262-C008005	rev	A
cat. no.	Product - Customer Drw	sheet 2 of 3			

Amphenol FCI




© 2016 AFCI

NOTES:

- 1) PRODUCT MARK:
PART NUMBER AND DATE CODE TO BE MARKED ON THIS SURFACE .
THE MARK CAN BE OMITTED IF THERE IS NOT ENOUGH SPACE ON THIS SURFACE.
- 2) MATERIALS:
-HOUSING : HIGH TEMP THERMOPLASTIC WITH GLASS FIBER, UL94V-0, BLACK.
-POWER CONTACT : HIGH CONDUCTIVITY COPPER ALLOY.
-SIGNAL CONTACT : COPPER ALLOY.
- 3) PLATING SPECIFICATION : 10116351
- 4) DENOTES CONNECTOR KEEP OUT ZONE.
- 5) DATUM AND BASIC DIMENIONS ARE ESTABLISHED BY CUSTOMER.
- 6) ALL HOLE DIAMETERS ARE FINISHED HOLE SIZES.
- 7) 1.15+/-0.025MM DRILLED HOLE PLATED WITH 0.00762MM MIN SN
OVER 0.0254-0.0762MM CU PLATING TO ACHIEVE A 1.02+/-0.07MM HOLE.
- 8) THE HOUSING WILL WITHSTAND EXPOSURE TO 265 °C PEAK TEMPERATURE
FOR 10 SECONDS IN A WAVE SOLDER APPLICATION.
- 9) THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY
REGULATIONS AS DESCRIBED IN GS-47-0004.
- 10) PRODUCT SPECIFICATION : GS-12-658.
APPLICATION SPECIFICATION : GS-20-141.
PRODUCT PACKAGE SPECIFICATION: GS-14-1502.

Amphenol
FCi

© 2016 AFCI

spec ref		dr	Sunny2 Liu	2017/06/23	projection	MM	size	A3	scale	3:2
tolerance std		TOLERANCES UNLESS OTHERWISE SPECIFIED					ecn no		-	
ISO 406		eng	Sunny2 Liu	2017/07/24			rel level		Released	
ISO 1101		chr	Fancy Zhang	2017/07/24	product family		PwrBlade+			
surface		appr	Pei-Ming Zheng	2017/07/24	title		8HP + 32S + 4ACP		rev	
ISO 1302	linear				RA STB PLUG		dwg no 10106262-C008005		A	
	angular									